


TNC SWITCH EDGE CARD SMT RIGHT TYPE


R143.422.957

PACKAGING IN REEL 110

Series : TNC

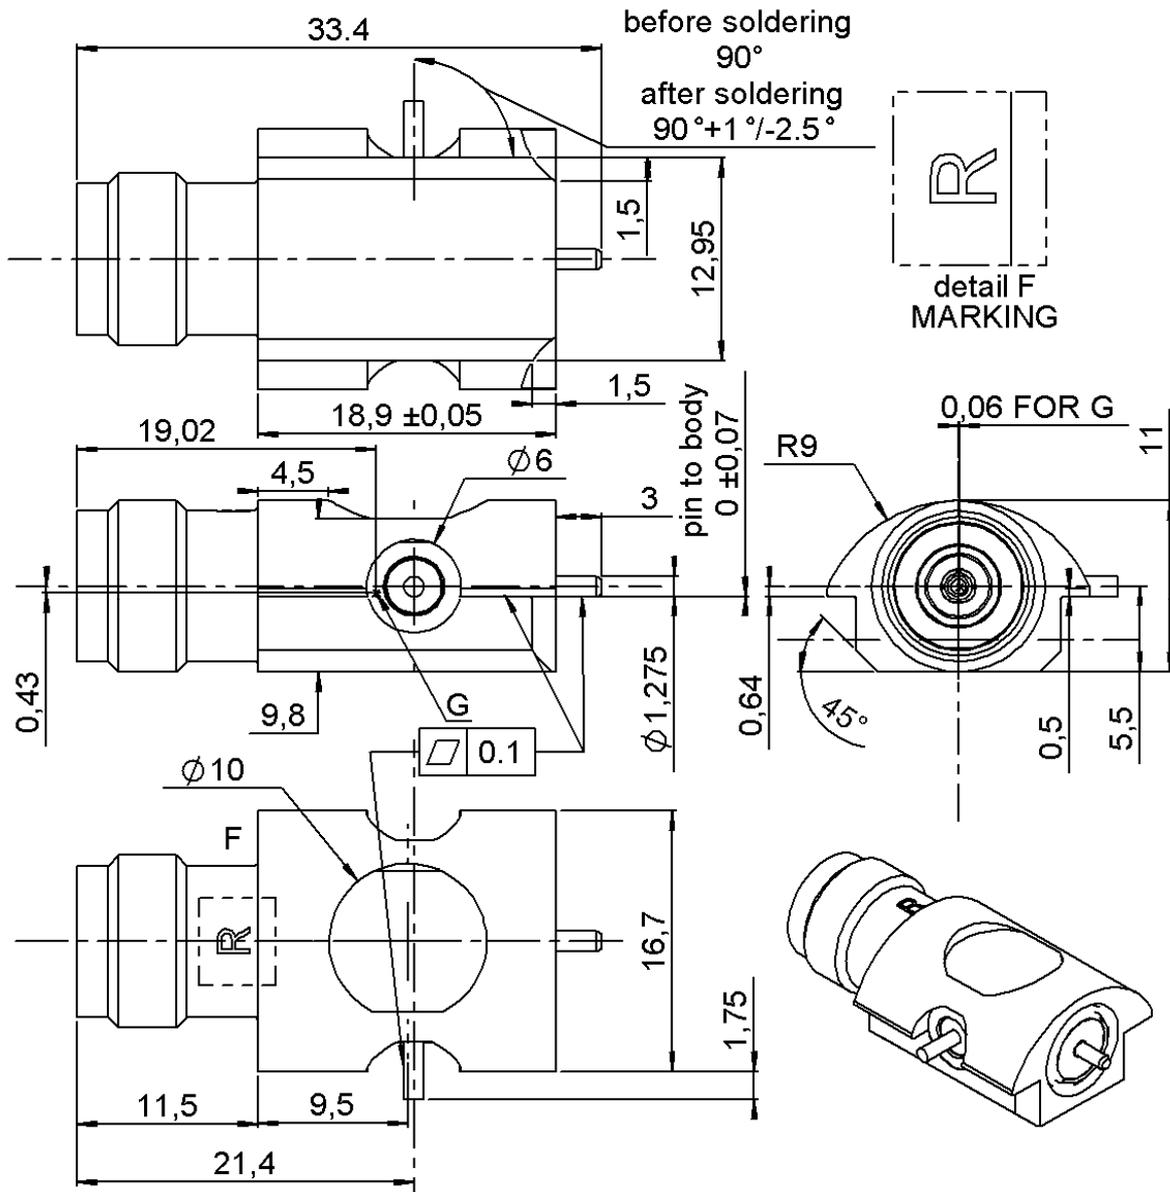

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
BODY	BRASS	NPGR
CENTER CONTACT	BERYLLIUM COPPER	NPGR
OUTER CONTACT	BRASS	NPGR
INSULATOR	PEEK	
GASKET	-	
OTHERS PARTS	BRASS	NPGR
-	-	-
-	-	-

Issue : 0823 D

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



TNC SWITCH EDGE CARD SMT RIGHT TYPE

R143.422.957

PACKAGING IN REEL 110

Series : TNC

PACKAGING

SPECIFICATION

Standard	Unit	Other
110	'W' option	Contact us

1301-RNT 408 4010 UEN rev C

ELECTRICAL CHARACTERISTICS

ENVIRONMENTAL

Impedance	50	Ω
Frequency	DC-3	GHz
VSWR	1.1 + 0,1000	x F(GHz) Maxi
Isolation at DC to 1 Ghz	-47	DB Typical
Isolation at 1 to 2 Ghz	-43	DB Typical
Isolation at 2 to 3 Ghz	-40	DB Typical
Insertion loss DC to 1 Ghz	0.1	\sqrt{F} (GHz) dB Maxi
Insertion loss 1 to 2 Ghz	0.15	dB Maxi
Insertion loss 2 to 3 Ghz	0.2	dB Maxi
RF leakage	NA	- F(GHz)) dB Maxi
Voltage rating	300	Veff Maxi
Dielectric withstanding voltage	500	Veff mini
Insulation resistance	5000	M Ω mini
Power withstanding	80	W at 0.9 Ghz
	50	W at 1.9 Ghz

Operating temperature	-40/+85	$^{\circ}$ C
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

OTHERS CHARACTERISTICS

Assembly instruction

Others :
Action Mating force :
20 N MAX
15 N min

(1) Do not apply force on the center contac before
Mounting the switch on PCB

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating end	NA	N mini
Axial force – Opposite end	NA	N mini
Torque	NA	N.cm mini
Axial force side pin	(1)	
Recommended torque		
Mating	22	N.cm
Panel nut	NA	N.cm
Mating life	100	Cycles mini
Weight	20,9800	g

Issue : 0823 D

In the effort to improve our products, we reserve the right to make changes judged to be necessary.




TNC SWITCH EDGE CARD SMT RIGHT TYPE

R143.422.957


PACKAGING IN REEL 110

Series : TNC

VSWR direct line

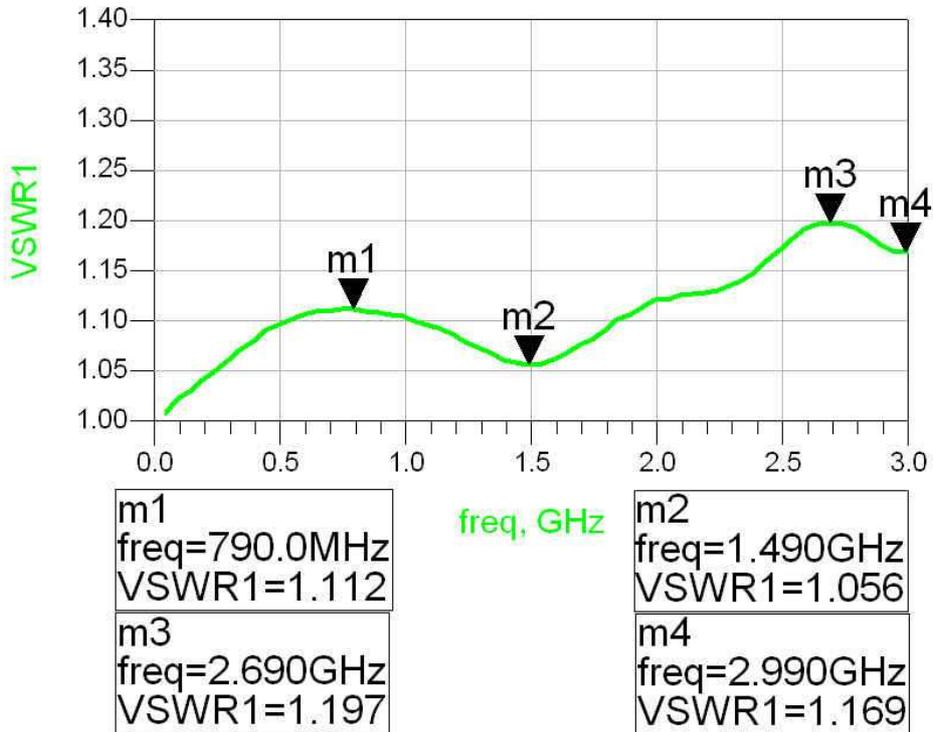

VSWR switched line

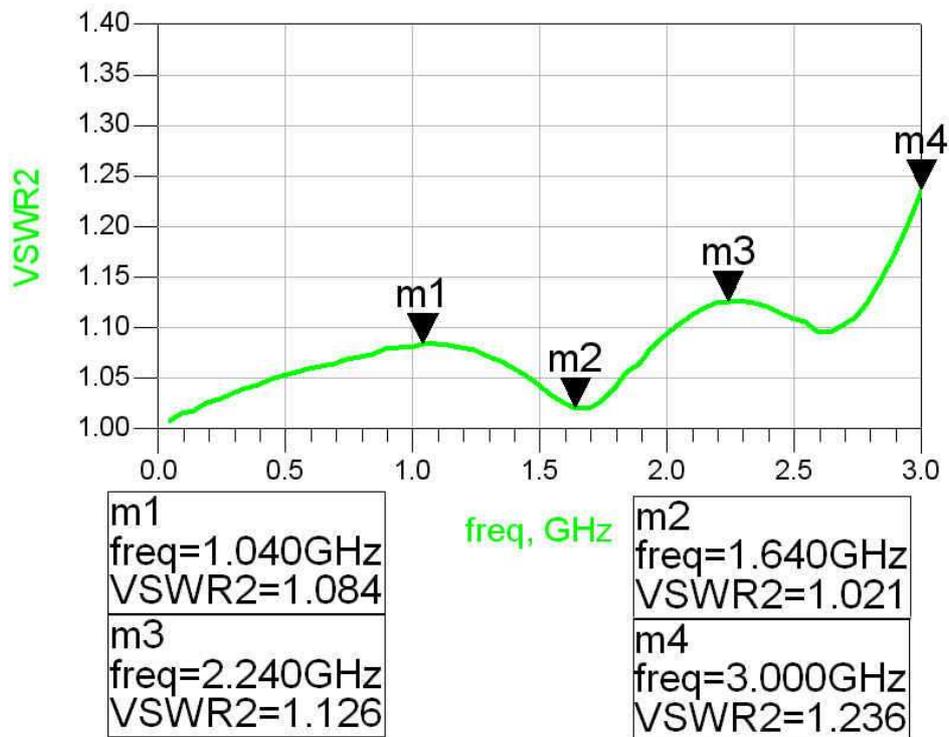

Issue : 0823 D

In the effort to improve our products, we reserve the right to make changes judged to be necessary.




TNC SWITCH EDGE CARD SMT RIGHT TYPE

R143.422.957

PACKAGING IN REEL 110


Series : TNC

Insertion loss direct line

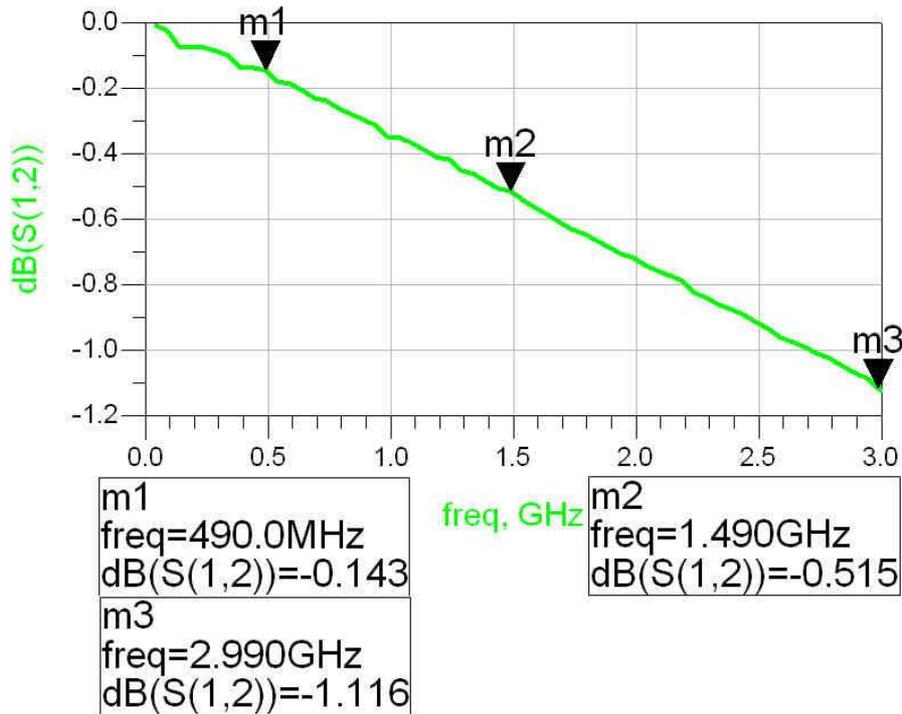

the measurement includes the insertion loss due to the test board and connectors

Insertion loss switched line

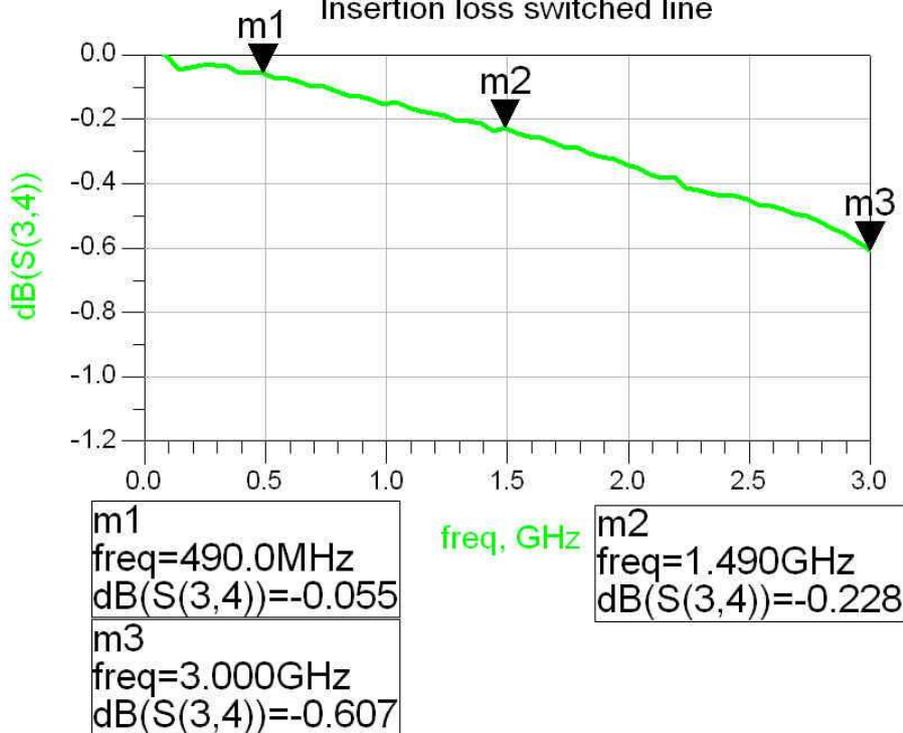

the measurement includes the insertion loss due to the test board and connectors

Issue : 0823 D

In the effort to improve our products, we reserve the right to make changes judged to be necessary.




TNC SWITCH EDGE CARD SMT RIGHT TYPE

R143.422.957

PACKAGING IN REEL 110

Series : TNC

Isolation switched line

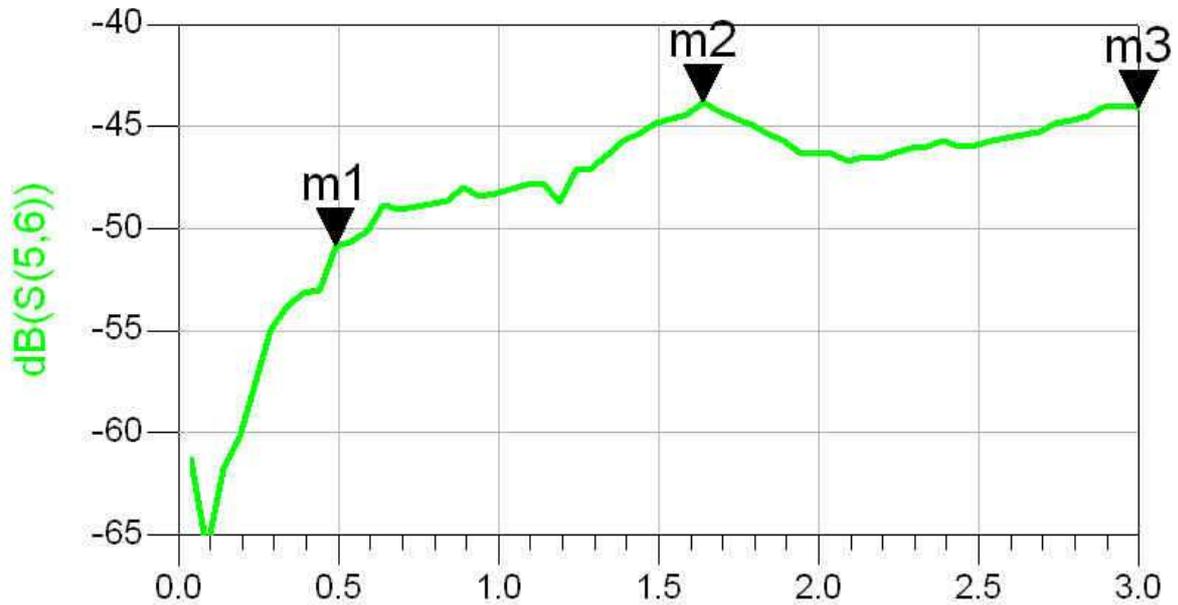

m1
 freq=490.0MHz
 dB(S(5,6))=-50.856

m3
 freq=3.000GHz
 dB(S(5,6))=-44.091

freq, GHz m2
 freq=1.640GHz
 dB(S(5,6))=-43.790

Issue : 0823 D

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



TNC SWITCH EDGE CARD SMT RIGHT TYPE

R143.422.957

PACKAGING IN REEL 110


Series : TNC

SOLDER PROCEDURE

1. Deposit solder paste ‘Sn Ag4 Cu0.5’ on mounting zone by screen printing application. We recommend a low residue flux.
We advise a thickness of 150 microm (5.850 microinch). Verify that the edges of the zone are clean.
2. Placement of the receptacle on the mounting zone with an automatic machine of ‘pick and place’ type. A video camera is recommended for positioning of the component . Adhesive agents must not be used on the receptacle.
3. This process of soldering has been tested with convection oven .Below please find ,the typical profile to use.
4. The cleaning of printed circuit boards is not obliged .
5. Verification of solder joints and position of the component by visual inspection.

NOTE : The receptacle and the plug must not be mated before completion of this procedure

TEMPERATURE PROFILE

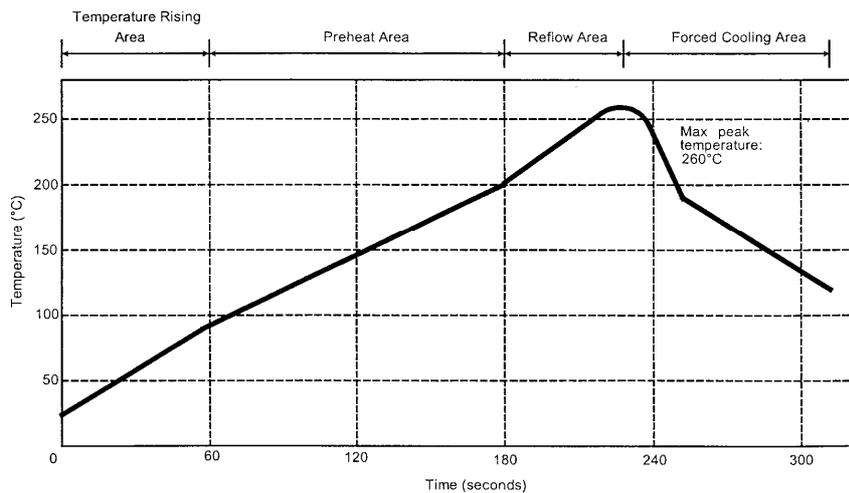

Parameter	Value	Unit
Temperature rising Area	1 - 4	°C/sec
Max Peak Temperature	260	°C
Max dwell time @260°C	10	sec
Min dwell time @235°C	20	sec
Max dwell time @235°C	60	sec
Temperature drop in cooling Area	-1 to - 4	°C/sec
Max dwell time above 100°C	420	sec

Issue : 0823 D

In the effort to improve our products, we reserve the right to make changes judged to be necessary.




TNC SWITCH EDGE CARD SMT RIGHT TYPE

R143.422.957


PACKAGING IN REEL 110

Series : TNC

PCB for TNC switch

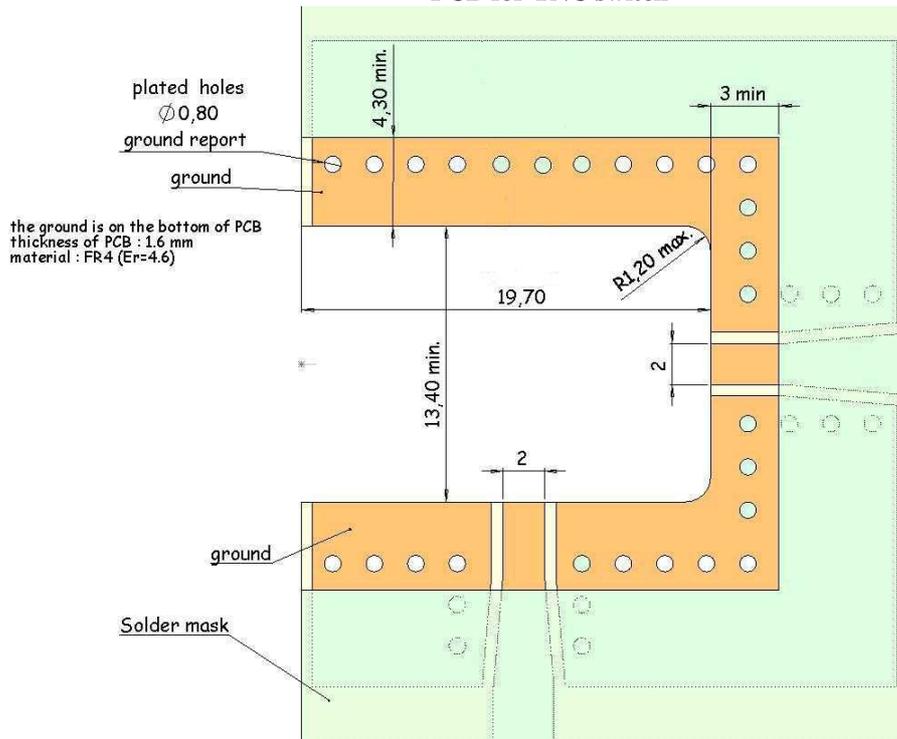

Shadow of TNC switch for video camera

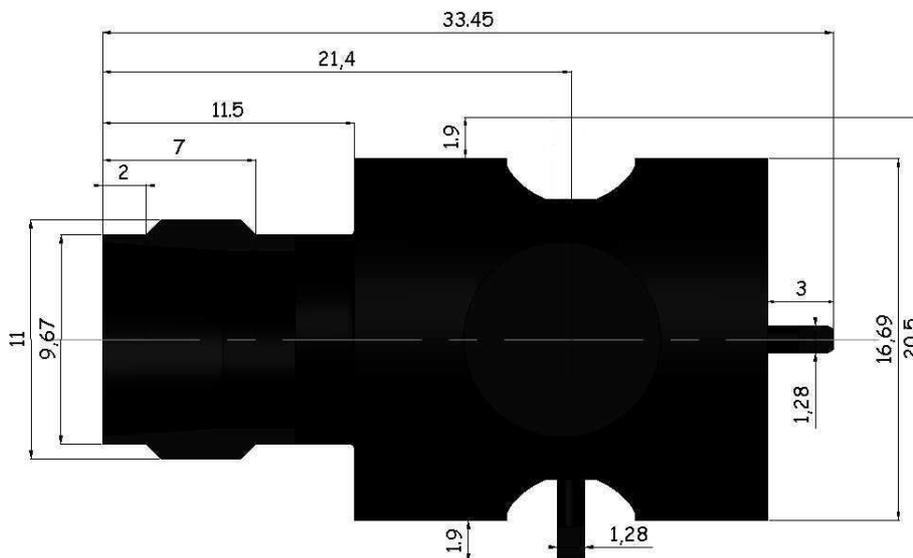

Issue : 0823 D


In the effort to improve our products, we reserve the right to make changes judged to be necessary.




TNC SWITCH EDGE CARD SMT RIGHT TYPE
PACKAGING IN REEL 110

R143.422.957

Series : TNC

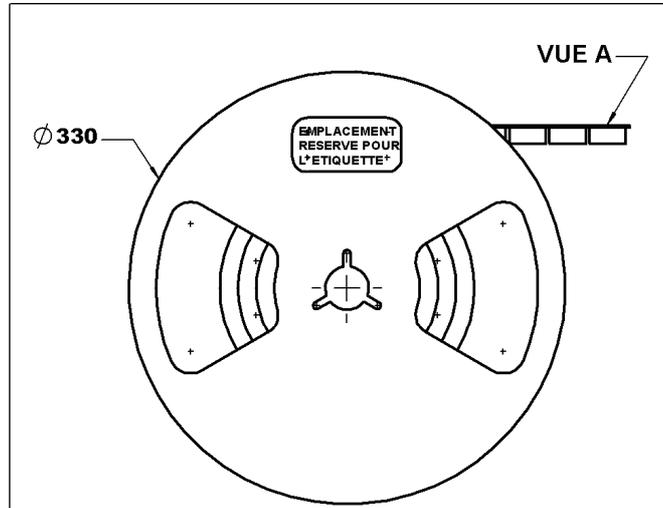

bobine Ech :0.7

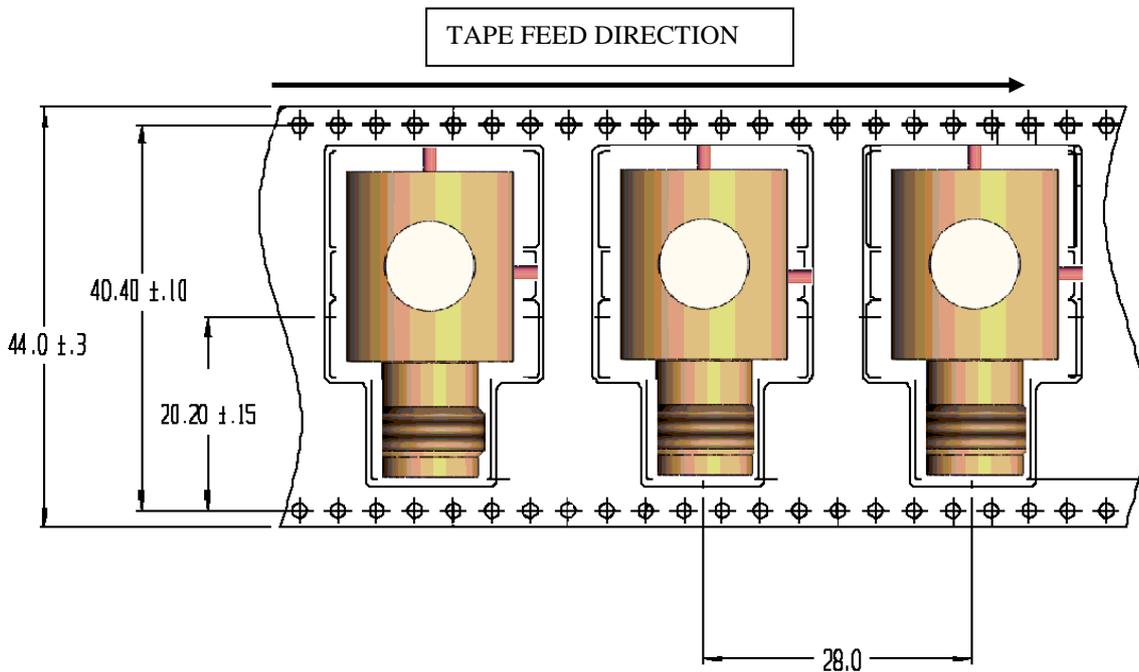

Issue : 0823 D

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9