


Features

- LNA Mixer integration.
- Typical conversion gain of 7 dB.
- Typical Two-Tone IM Ratio of ≥ 50 dBm.
- LO Drive-Level: +13 dBm.
- Surface Mount QSOP16 Package.
- Low Cost/High Performance.
- 50 ohm Nominal Impedance.


Description

M/A-COM's SA65-0003 is an integrated assembly containing a GaAs FET MMIC LNA and GaAs FET mixer. This device is packaged in a 16-leaded QSOP plastic surface mount package. The amplifier can be biased with either +3V or +5V, the mixer requires no DC bias. The conversion gain of the integrated combination is typically 6 dB at +3V bias and 8 dB at +5V bias. The SA65-0003 is ideally suited for RF/IF communications applications requiring down conversion with some gain. This MCM contains a mixer that is fabricated using a mature 1-micron GaAs process, it also contains an LNA that is fabricated using a low cost mature 0.5-micron gate length GaAs MESFET process. Both die feature full passivation for increased performance and reliability.


QSOP-16

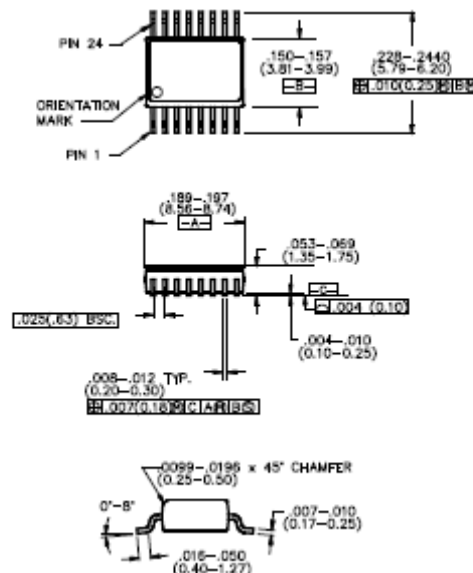

Functional Block Diagram

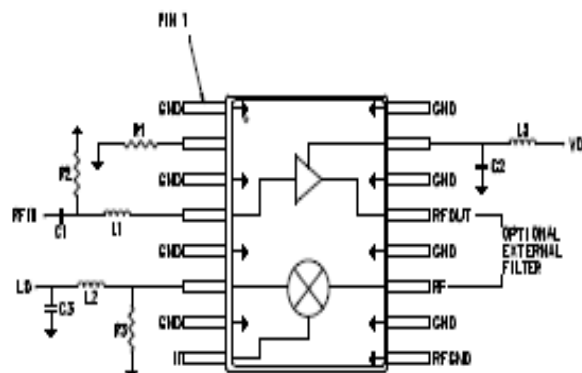

Recommended PCB Layout

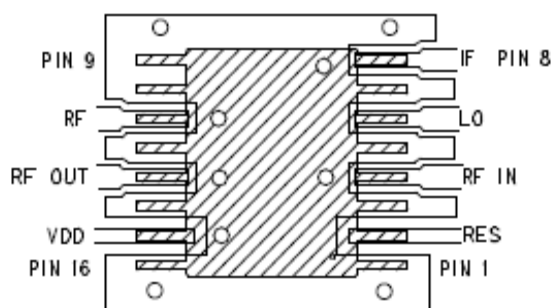

CIRCUIT MATERIAL: FR-4 .010 THICK
DIA .014 PLATED THRU HOLES
RF PORTS = 50 OHMS
LINE WIDTH = .020
LINE SPACING = .006
DIMENSIONS IN INCHES

Down Converter, 1500 - 2000 MHz

Rev. V2

Electrical Specifications: $T_A = +25^{\circ}\text{C}$, $Z_0 = 50\ \Omega$, $RF = -10\ \text{dBm}$ ¹, $LO = +13\ \text{dBm}$,
 $I_{DD} = 45\ \text{mA}$

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Conversion Gain ^{6,7}	LNA +3V	dB	3.1	6.0	6.6
	LNA +5V	dB	4.6	8.0	8.8
Isolation ⁴	LO to RF IN	dB	29	32	—
	LO to IF	dB	19	23	—
Reverse Isolation ⁵	LNA +3V	dB	30	40	—
VSWR	LO	Ratio	—	1.4:1	—
	RF IN	Ratio	—	1.9:1	2.5:1
	IF	Ratio	—	1.9:1	2.1:1
Input IP_3	LNA +3V	dB	13	17.5	—
	LNA +5V	dB	21	25	—

- For IP_3 measurements, $RFIN = -24\ \text{dBm}$, this low RF IN level gets amplified through the LNA.
- For IP_3 measurements, $RFIN2 = RFIN1 + 10\ \text{MHz}$, $LO = RFIN1 - 140\ \text{MHz}$.
- For IP_3 measurements, $IP_3 = IMR/2 + PIN$.
- RF IN to IF Isolation is typically 0 dB.
- Reverse Isolation is measured from IF to RFIN with the IF at $-10\ \text{dBm}$, LO at $+13\ \text{dBm}$.
- The amplifier has a normal gain of 12.5 dB, 3V bias and 14.0 dB, 5V bias. Amplifier typical Noise Figure = 1.5 dB.
- $NF_T = NF_1 + (NF_2 - 1)/G_1$

Absolute Maximum Ratings⁸

Parameter	Absolute Maximum
RF Input Power ⁹	+17 dBm
LO Drive Power ⁹	+23 dBm
V_{DD}	+10 VDC
Current ¹⁰	80 mA
Channel Temperature ¹¹	+150°C
Storage Temperature	-65°C to +150°C
Operating Temperature	-40°C to +85°C


- Operation of this device above any one of these parameters may cause permanent damage.
- Total power for RF and LO ports should not exceed +23 dBm.
- When pin #2 is used to increase current—see note 6 above.
- Thermal resistance (θ_{JA}) = +95°C/W.

Pin Configuration

Pin No.	Function	Description
1	GND	RF and DC Ground
2	RES	External current control (optional)
3	GND	RF and DC Ground
4	RF IN	RF Input of the amplifier
5	GND	RF and DC Ground
6	LO	LO port of the mixer
7	GND	RF and DC Ground
8	IF	IF port of the mixer
9	RF GND	RF and DC Ground
10	GND	RF and DC Ground
11	RF ¹²	RF port of the mixer
12	GND	RF and DC Ground
13	RF OUT ¹²	RF output of the amplifier
14	GND	RF and DC Ground
15	V_{DD}	Positive supply voltage
16	GND	RF and DC Ground

12. The output port of the amplifier, RFOUT, and the input port of the mixer, RF, are adjacently placed so that an external filter can be used.

Typical Performance Curves

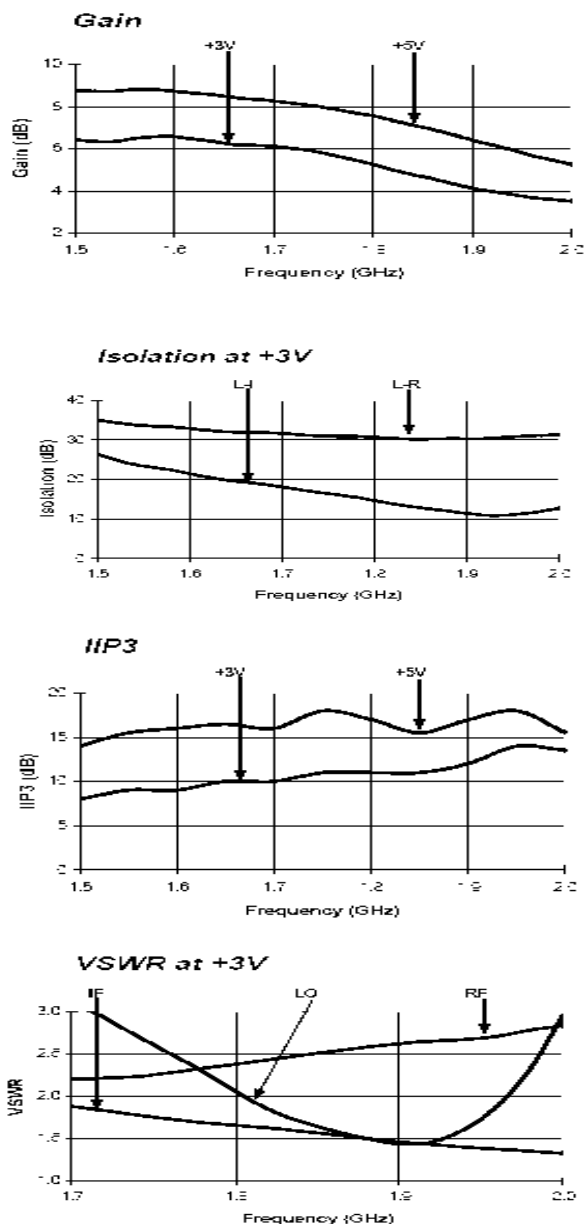

Ordering Information

Part Number	Package
SA65-0003	Bulk Packaging
SA65-0003TR	Tape and Reel (1K Reel)
SA65-0003-TB	Unit Mounted on Test Board

External Circuitry Parts ¹³

Part	Value	Purpose
C1	47 pF	DC Block
C2	47 pF	By-pass
C3	3.3 pF	LO Port Matching Network
L1	3.9 nH	Tuning
L2	3.0 nH	LO Port Matching Network
L3	12 nH	RF Choke
R1	See Note 14	Optional Current Control
R2	5.1 k Ohms	DC Return
R3	330 Ohms	LO Port Matching Network

13. All external circuitry parts are readily available, low cost surface mount components (.060 in. x .030 in. or .080 in. x .050 in.).

14. Pin 2 allows use of an external resistor to ground for optional higher current. For 20 mA operation, no resistor is used.

For $I_{DD} > 30$ mA, $R2 = 43$ Ohms

For $I_{DD} > 45$ mA, $R2 = 15$ Ohms

For $I_{DD} > 60$ mA, $R2 = 10$ Ohms

Spurious Table

Harmonic Of LO (n)		-12	-37	-65	-75	-75
	4X	-1.9	-39	-72	-77	-77
		-2.8	-29	-68	-66	-74
	3X	7.1	-30	-70	-77	-75
		7.0	-27	-37	-68	-74
	2X	11.8	-27	-47	-75	-75
		4.5	0	-48	-69	-74
	1X	11.8	0	-58	-76	-76
		N/A	-5	-46	-75	-70
	0X	N/A	-5	-46	-75	-70
Harmonic of RFIN (m)						
	0X	1X	2X	3X	4X	

The spurious table shows the spurious signals resulting from the mixing of the RFIN and LO input signals, assuming down conversion. The number of dB below the conversion loss level indicates the mixing products. The lower frequency mixing term is shown for two different input levels. The top number is for an RFIN power level of -19 dB; the lower number is for -29 dB. Assuming the LNA gain is approximately 14 dB, the mixer input will see approximately -5 dB and -15 dB.

$|m_{RF} - n_{F_{LO}}|$, RF = -19 dB RF = 1850 MHz

$|m_{RF} - n_{F_{LO}}|$, RF = -29 dB LO = 1710 MHz

• North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400
• India Tel: +91.80.4155721 • China Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9