


FineAdjust
Applicator**molex**Application Tooling
Specification Sheet

Order No. 63866-5100


FEATURES

- Quick punch removal with the push of a button for fast and easy tooling change
- Applicator designed to industry standard mounting and shut height 135.80mm (5.346")
- Quick set-up time; plus the crimp height, track and feed adjustments can be set without removing the applicator from the press
- Fine adjustment allows users to achieve target with little effort by adjusting in increments of .015mm (.0006") for conductor crimp height and .063mm (.0025") for insulation height
- Independent adjustment rings allow users to quickly adjust the conductor or insulation crimp height without affecting each other
- Directly adapts to most automatic wire processing machines

SCOPE

Products: MX64 GET Receptacle Terminal, 22 AWG and 0.22-0.35mm².

Terminal Order No.		Wire Size	Actual mm ²	Wire Specification		Insulation Diameter		Strip Length	
				Low Temp.	High Temp	mm	In.	mm	In.
34230-0001	Female (Tin)	22 AWG	0.352	WSB-M1L134-A1	WSS-M1L135-A1	1.50-1.65	.059-.065	4.00-4.80	.157-.189
				ESB-M1L120-A	ESB-M1L123-A/A2				
		0.35mm ²	0.340	WSK-M1L124-A	S97GG-14401-AA	1.20-1.40	.047-.055	4.00-4.80	.157-.189
		0.22mm ²	0.214	WSK-MIL124-A	N/A	1.10-1.20	.043-.047	4.00-4.80	.157-.189

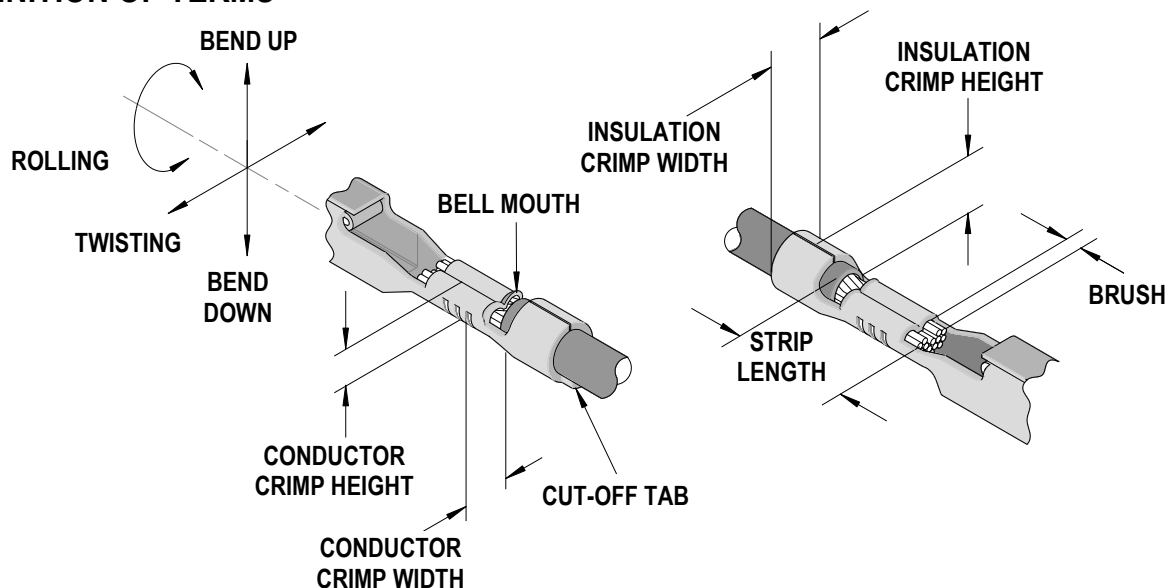DEFINITION OF TERMS

CRIMP SPECIFICATION

Terminal Series No.	Bell mouth (Front Only)		Cut-off Tab Max.		Conductor Brush	
	mm	In.	mm	In.	mm	In.
34230-0001	0.20-0.50	.008-.020	0.50	.020	0.10-1.00	.004-.039

Terminal Order No.	Wire Size	Actual mm²	Bend up Bend down		Twist Roll		Punch Width (Ref)				Seam Seam shall not be open and no wire allowed out of the crimping area
			Degree		Degree		Conductor		Insulation		
							mm	In	mm	In	
34230-0001	22 AWG	0.352	3	3	2.5	N/A	1.35	.053	1.65	.065	
	0.35mm²	0.340	3	3	2.5	N/A	1.35	.053	1.65	.065	
	0.22mm²	0.214	3	3	2.5	N/A	1.35	.053	1.65	.065	

After crimping, the conductor profile should measure the following.

Terminal Series No.	Wire Size	Actual mm ²	Wire Specification		Conductor				Pull Force Minimum	
					Crimp Height		Crimp Width			
			Low Temp.	High Temp	mm	In.	mm	In.	N	Lb.
34230-0001	22 AWG	0.352	WSB-M1L134-A1	WSS-M1L135-A1	1.02-1.10	.040-.043	1.39-1.47	.055-.058	53.0	11.93
			ESB-M1L120-A	ESB-M1L123-A/A2	1.02-1.10	.040-.043	1.39-1.47	.055-.058	53.0	11.93
	0.35mm ²	0.340	WSK-M1L124-A	S97GG-14401-AA	1.02-1.10	.040-.043	1.39-1.47	.055-.058	53.0	11.93
	0.22mm ²	0.214	WSK-MIL124-A	N/A	0.96-1.04	.038-.041	1.38-1.46	.054-.057	40.0	9.00

Terminal Series No.	Wire Size	Actual mm ²	Wire Specification		Insulation			
					Crimp Height		Crimp Width	
			Low Temp.	High Temp	mm	In.	mm	In.
34230-0001	22 AWG	0.352	WSB-M1L134-A1	WSS-M1L135-A1	1.50-1.70	.059-.067	1.60-1.80	.063-.071
			ESB-M1L120-A	ESB-M1L123-A/A2	1.50-1.70	.059-.067	1.60-1.80	.063-.071
	0.35mm ²	0.340	WSK-M1L124-A	S97GG-14401-AA	1.50-1.70	.059-.067	1.60-1.80	.063-.071
	0.22mm ²	0.214	WSK-MIL124-A	N/A	1.50-1.70	.059-.067	1.60-1.80	.063-.071

■ Tool Qualification Notes:

1. Pull Force should be measured with no influence from the insulation crimp.
2. The above specifications are guidelines to an optimum crimp.

PARTS LIST

FineAdjust Applicator 63866-5100				
Item	Order No	Engineering No.	Description	Quantity
Perishable Tooling				
	63866-5170	63866-5170	Tool Kit (All "Y" Items)	REF
1	63457-0021	63457-0021	Conductor Punch	1 Y
2	63455-0021	63455-0021	Conductor Anvil	1 Y
3	63454-0033	63454-0033	Insulation Punch	1 Y
4	63456-0028	63456-0028	Insulation Anvil	1 Y
5	63461-0001	63461-0001	Cut-Off Plunger	1 Y
6	63443-0036	63443-0036	Front Plunger Retainer	1 Y
Other Components				
7	11-17-0022	1739-21	Hold Down Spring	1
8	11-18-4094	60709A111	Feed Guide	1
9	63443-0009	63443-0009	Front Scrap Chute	1
10	63443-0021	63443-0021	Lower Tooling Key	1
11	63443-0061	63443-0061	Wire Stop	1
12	63443-0093	63443-0093	Shank	1
13	63443-2510	63443-2510	Anvil Mount	1
14	63443-3160	63443-3160	Front Plunger Striker	1
15	63443-6009	63443-6009	Rear Cover	1
16	63443-7126	63443-7126	Terminal Hold-Down	1
17	63700-0539	63700-0539	Cut-Off Plunger Spring	1
Frame				
18	63800-4901	63800-4901	Top	1
19	63801-3281	63801-3281	Base	1
20	63801-4650	63801-4650	Track	1
Hardware				
21	N/A	N/A	M3 by 6 Long SHCS	2**
22	N/A	N/A	M3 by 8 Long SHCS	1**
23	N/A	N/A	M4 by 6 Long SHCS	1**
24	N/A	N/A	M4 by 12 Long BHCS	2**
25	N/A	N/A	M4 by 50 Long SHCS	2**
26	N/A	N/A	M5 by 12 Long SHCS	1**
27	N/A	N/A	#10-32 by 3/8" Long Flat Point SSS	1**
28	N/A	N/A	#10-32 Hex Jam Nut	1**
29	N/A	N/A	3MM by 6 Long Roll Pin	1**
** Available from an industrial supply company such as MSC (1-800-645-7270).				

Assembly Drawing

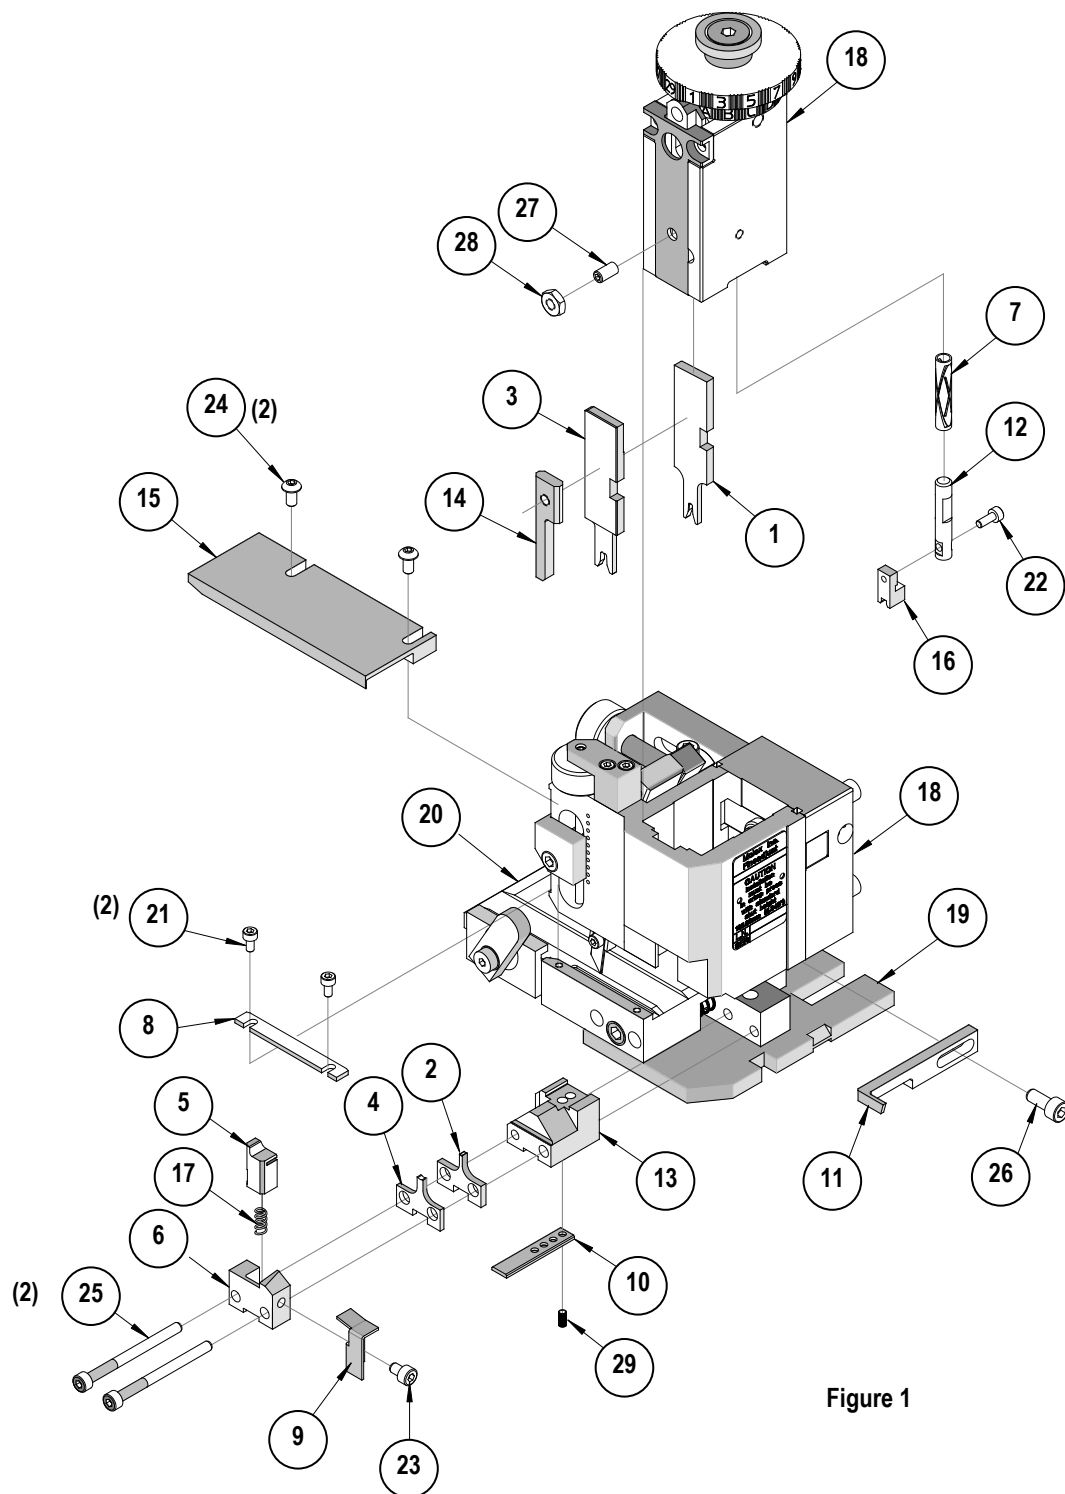


Figure 1

NOTES

1. Molex recommends an extra perishable tooling kit be maintained at your facility.
2. Verify tooling alignment by manually cycling the press and Applicator before crimping under power. Check that all screws are tight.
3. Slugs, Terminals, Dirt and Oil should be kept clear of work area.
4. Wear safety glasses at all times.
5. For recommended maintenance refer to the FineAdjust Manual.

CAUTION: This applicator should only be used in a press with a shut height of 135.80 mm (5.346"). Tooling damage could result at a lower setting.

CAUTION: To prevent injury never operate this Applicator without the guards supplied with the press or wire-processing machine in place. Reference the press or wire processing manufacturer's instruction manual.

CAUTION: Molex crimp specifications are valid only when used with Molex terminals, applicators and tooling.

Visit our Web site at <http://www.molex.com>

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9