


Drop-in Networking Starter Kit

Wireless PAN-to-IP Application & Development Kit

The Drop-in Networking Starter Kit is designed to demonstrate the functionality of Digi's Drop-in Networking solutions and how these versatile and easy-to-apply products can be used to implement innovative wireless device networking applications.

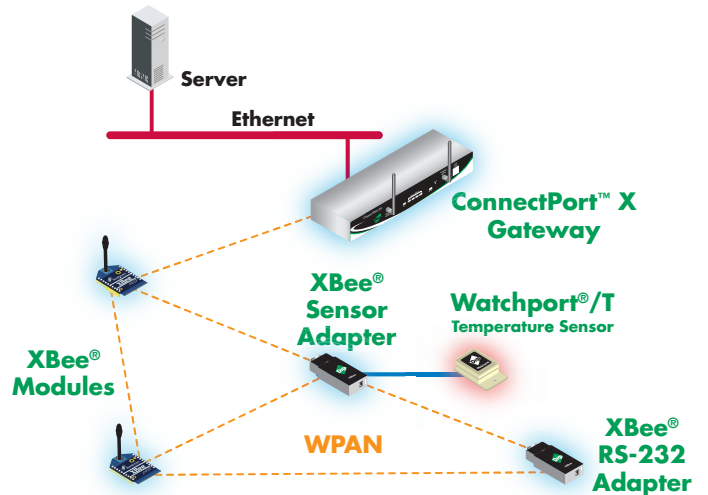

Features/Benefits

- Easy-to-use, cost reduced kit includes:
 - ConnectPort X8 gateway (1)
 - XBee RS-232 adapter (1)
 - XBee Sensor adapter (1)
 - XBee modules and interface boards (2)
 - Watchport/T temperature sensor (1)
- Allows quick configuration of a low-power mesh or multipoint network
- Wirelessly enable an existing serial device using the XBee RS-232 adapter
- ConnectPort X8 gateway provides WPAN-to-Ethernet connectivity
- Includes Python programming tools for custom software development

Overview

Digi's Drop-in Networking solutions are designed to provide end-to-end wireless connectivity to distributed electronic devices so those devices and the information they hold can be accessed and managed from anywhere. Drop-in Networking enables product and service differentiation by making devices smarter through wireless network connectivity and using this added intelligence to deliver faster, more accurate and more relevant information to end users.

The Drop-in Networking Starter Kit provides the hardware and software tools to add low-cost wireless communication functionality to new and existing products. Each kit contains the following items and can be configured in a matter of minutes:

ConnectPort™ X8 Gateway (1) - Wireless Personal Area Network (WPAN)-to-Ethernet model; collects data traffic from XBee devices, in this case the two included XBee adapters and the two XBee modules, and IP-enables that data traffic. The ConnectPort X8 is also available with cellular and Wi-Fi connectivity

XBee® RS-232 Adapter (1) - Provides wireless connectivity to any RS-232 serial device.

XBee® Sensor Adapter (1) - Wirelessly enables the Watchport/T temperature sensor.

Watchport®/T Temperature Sensor (1) - Provides remote temperature readings.

XBee® Modules and Interface Boards (2) - Provide embeddable wireless capability for integration into original product designs (e.g., sensors, meters, pumps, controllers).

Other - Also includes power supplies, cable adapters, user documentation, and Python code samples.



| Kit Type | XBee® ZNet 2.5 | XBee® 802.15.4 |
|--------------------------------|--|---|
| Product Type | XBee® Embedded Modules | |
| Performance | | |
| RF Data Rate | 250 Kbps | 250 Kbps |
| Indoor/Urban Range | Up to 133 ft (40 m) | Up to 100 ft (30 m) |
| Outdoor/RF Line-of-Sight Range | Up to 400 ft (20 m) | Up to 300 ft (90 m) |
| Transmit Power | 1.25 mW (+1 dBm) / 2 mW (+3 dBm) boost mode | 1 mW (0 dBm) |
| Receiver Sensitivity (1% PER) | -96 dBm in boost mode | -92 dBm |
| General | | |
| Frequency Band | 2.4 GHz | |
| Sleep Modes | Low-power sleep modes enable power-down currents less than 10 uA | |
| Support Topologies | Point-to-point, Point-to-multipoint, Mesh | Point-to-point, Point-to-multipoint, Peer-to-peer |
| Environmental | | |
| Operating Temperature | -40° C to +85° C (Industrial) | |
| Product Type | ConnectPort™ X8 Gateway | |
| General | | |
| Configuration Options | Interfaces – Physical: Serial, Ethernet, USB; Air: Low-power RF via XBee module, Cellular & Wi-Fi via PCIe module (not included) | |
| Other Options | GPS and Local Storage – Available separately via PCIe module | |
| Programmability | On-board Python engine; kit includes sample applications | |
| Security | IPsec and SSL VPNs on WAN connections with DES, 3DES or AES encryption, 128-bit AES on ZigBee network | |
| Commercial/Industrial Grade | Enclosed PCIe modules to reduce breakage/theft Extended operating temperature (-20° C to +60° C) Hardened metal enclosure with integrated mounting slots | |
| Router/Security Features | NAT, port forwarding, access control lists (IP filtering) | |
| Management | HTTP interface, password access control, IP service port control, optional network management via Digi Connectware Manager | |
| Power Requirements | | |
| Power Input | 9-30VDC (12 VDC power supply included) | |
| Power Consumption | 1.2 W (idle) / 3.4 W (max) | |
| Product Type | XBee® Adapters | |
| General | | |
| Wireless | Same as module specifications above | Same as module specifications above |
| Form Factor | Small form factor for easy handling/installation | |
| Interface Options | Serial (RS-232, RS-485), USB, Sensor (Accepts Digi's Watchport Sensors), Digital I/O, Analog I/O | |
| Powering Options | External power supply or N-cell alkaline batteries; Lithium battery powered models available separately | |
| Product Type | Watchport®/T Temperature Sensor | |
| General | | |
| Compatibility | Plugs into included XBee Sensor adapter for wireless remote temperature monitoring | |
| Maximum Reading Rate | 20 per second | |
| Temperature Accuracy | Temperature accuracy: - +/- 3.6° F (+/- 2° C) at -40° F to +14° F (-40° C to -10° C) - +/- 0.9° F (+/- 0.5° C) at 14° F to 185° F (-10° C to +85° C) | |
| Temperature Resolution | 0.1° C | |
| Power Consumption | 15 (normal operation) / 1.0 mA (suspend mode) | |

Please visit www.digi.com/technology/drop-in-networking/products.jsp for a complete listing of product specifications and part numbers



DIGI SERVICE AND SUPPORT - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong five-year warranty. www.digi.com/support



Digi International

11001 Bren Road E.
Minnetonka, MN 55343
U.S.A.
PH: 877-912-3444
952-912-3444
FX: 952-912-4952
email: info@digi.com

Digi International France

31 rue des Poissonniers
92200 Neuilly sur Seine
PH: +33-1-55-61-98-98
FX: +33-1-55-61-98-99
www.digi.fr

Digi International KK

NES Building South 8F
22-14 Sakuragaoka-cho,
Shibuya-ku
Tokyo 150-0031, Japan
PH: +81-3-5428-0261
FX: +81-3-5428-0262
www.digi-intl.co.jp

Digi International (HK) Limited

Suite 1703-05, 17/F.,
K Wah Centre
191 Java Road
North Point, Hong Kong
PH: +852-2833-1008
FX: +852-2572-9989
www.digi.cn

Digi International, the leader in device networking for business, develops reliable products and technologies to connect and securely manage local or remote electronic devices over the network or via the web. With over 20 million ports shipped worldwide since 1985, Digi offers the highest levels of performance, flexibility and quality.

www.digi.com

© 2007-2008 Digi International Inc.

Digi, Digi International, the Digi logo, the When Reliability Matters logo, ConnectPort, Watchport, XBee and are trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. All other trademarks are the property of their respective owners.

91001425
B1/708



Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9