

10

9

8

7

6


5

4


3

2

74546

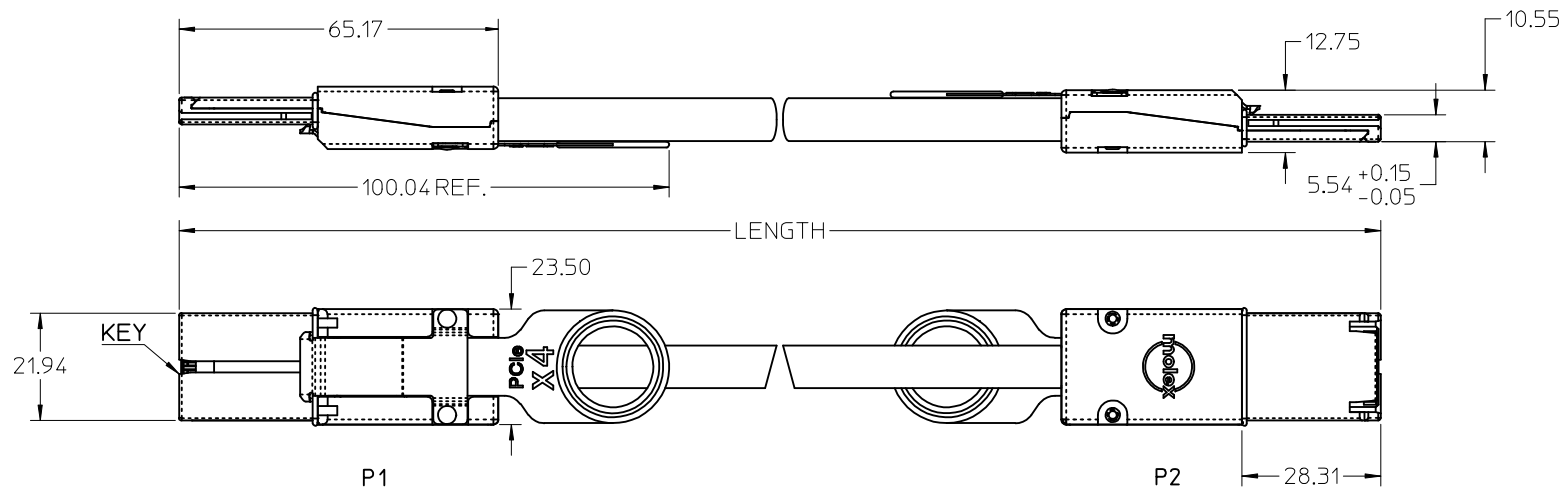

MOLEX P/N	LENGTH	GAGE	TOLERANCE	JACKET RATING
745460400	0.5M	28	0.03M	VW1
745460401	1.0M	28	0.05M	VW1
745460411	1.25M	28	0.05M	VW1
745460402	2.0M	28	0.05M	VW1
745460403	3.0M	28	0.05M	VW1
745460404	4.0M	28	0.10M	VW1
745460405	5.0M	26	0.10M	CL2
745460406	6.0M	26	0.13M	CL2
745460407	7.0M	24	0.13M	CL2
745460408	8.0M	24	0.13M	CL2
745460409	9.0M	24	0.15M	CL2
745460410	10.0M	24	0.15M	CL2

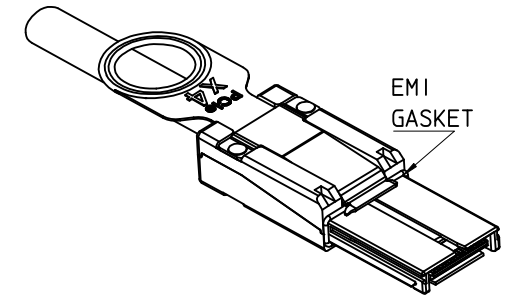

NOTES:

1. MATERIAL=

BACKSHELLS - ZINC DIECAST

PULL - NYLON

CABLE JACKET RATING - SEE TABLE

2. LENGTH AND TOLERANCE - SEE TABLE

3. ELECTRICAL PERFORMANCE PER PCI EXPRESS EXTERNAL CABLING SPEC.

4. PLUG MATES TO RECEPTACLE 75586-0010, AND EMI GUIDE HOUSING ASSY.74540-0400

5. THIS PRODUCT MEETS THE RESTRICTION OF HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT (RoHS) DIRECTIVE (2002/95/EC).

△. NOT COMPLIANT WITH INSERTION LOSS SPEC. PER. THE PCIE CABLING SPEC.

IPASS™ IS A TRADEMARK OF MOLEX

ENTER DESCRIPTION		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
EC NO: USY2007-0491		DRWN:JERWIN		mm		MM ONLY		1:1		METRIC		THIRD ANGLE PROJECTION	
2008/09/22		CHKD:DDOYE		INCH		DRAWN BY		DATE		TITLE		I-PASS X4 CABLE ASSEMBLY GEN 1	
2008/09/29		APPR:DDOYE		4 PLACES ± --- ± ---		Breed		2005/02/02		MOLEX INCORPORATED		SHEET NO. 1 OF 3	
2008/09/30		REV		3 PLACES ± --- ± ---		CHECKED BY		DATE		DOCUMENT NO.		SD-74546-400	
				2 PLACES ± 0.13 ± ---		DDOYE		2005/02/02		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
				1 PLACE ± 0.25 ± ---		APPROVED BY		DATE					
				ANGULAR ± 1/2°		DDOYE		2005/02/02					
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		SEE TABLE					
						SIZE		B					

9

8

7

6

5

4

3

2

1

10

9

8

7

6


5

4

3

2

74546

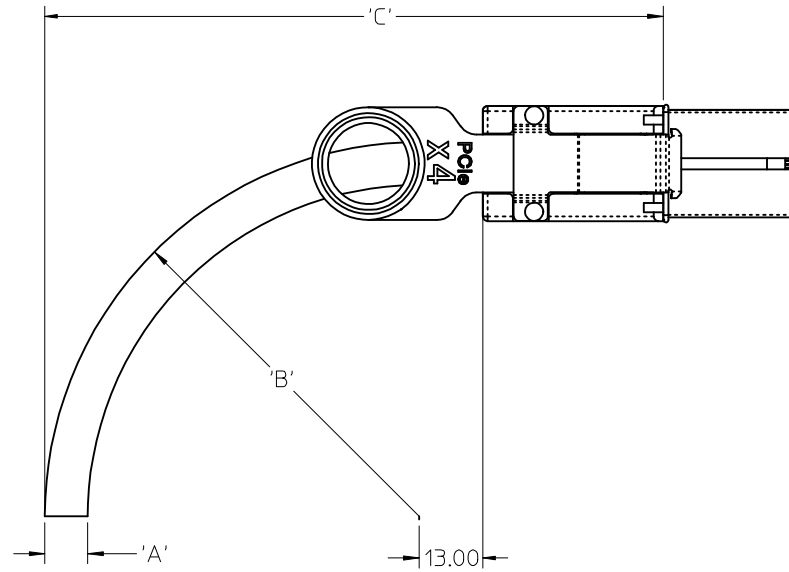

	CABLE GAUGE	24	26	28
A	CABLE DIAMETER	10.54	9.53	8.75
B	MINIMUM OUTER RADIUS	42.00	38.00	35.00
C	FACEPLATE TO OUTER RADIUS	91.86	87.86	84.86

IPASS™ IS A TRADEMARK OF MOLEX

ENTER DESCRIPTION EC NO: USY2007-0491 DRWN: JERWIN 2008/09/22 CHKD:DDOYE 2008/09/29 APPR:DDOYE 2008/09/30			DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS		THIRD ANGLE PROJECTION	
							MM ONLY		1:1	METRIC			
REV	K						mm	INCH	DRAWN BY		DATE		TITLE
									BREED		2005/02/02		
									CHECKED BY		DATE		I-PASS X4 CABLE ASSEMBLY GEN 1
									DDOYE		2005/02/02		
									APPROVED BY		DATE		MOLEX INCORPORATED
									DDOYE		2005/02/02		
									MATERIAL NO.		DOCUMENT NO.		SHEET NO. 3 OF 3
									SEE TABLE		SD-74546-400		
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													

9

8

7

6

5

4

3

2

1

10

9

8

7

6


5

4


3

2

74546

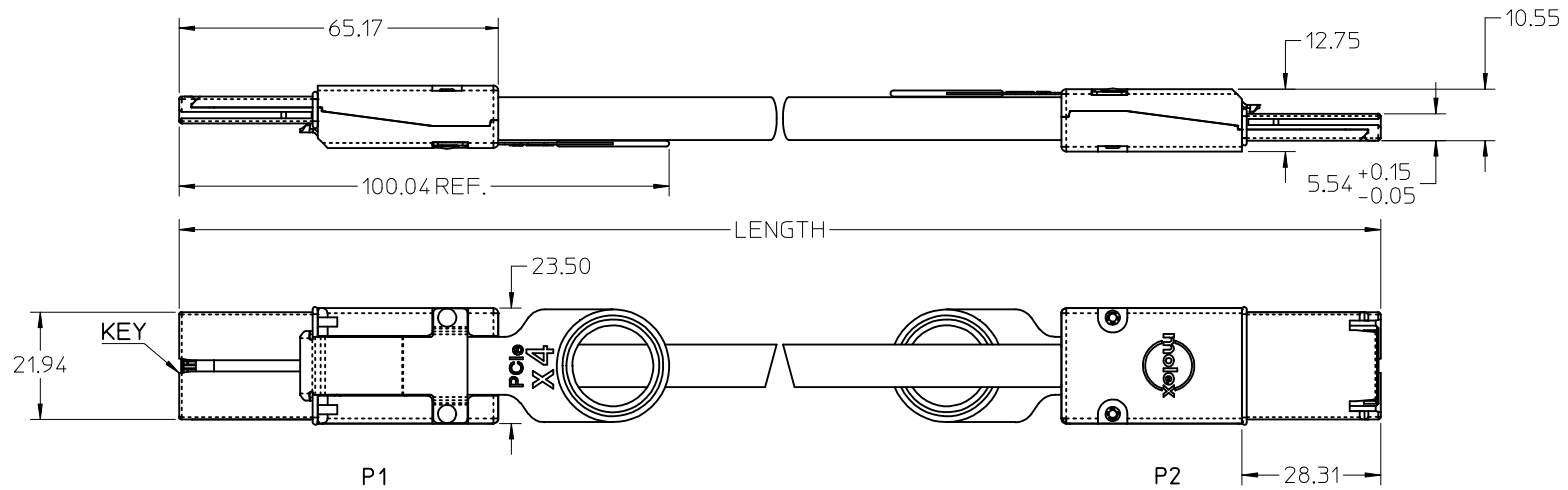

MOLEX P/N	LENGTH	GAGE	TOLERANCE	JACKET RATING
745460400	0.5M	28	0.03M	VW1
745460401	1.0M	28	0.05M	VW1
745460411	1.25M	28	0.05M	VW1
745460402	2.0M	28	0.05M	VW1
745460403	3.0M	28	0.05M	VW1
745460404	4.0M	28	0.10M	VW1
745460405	5.0M	26	0.10M	CL2
745460406	6.0M	26	0.13M	CL2
745460407	7.0M	24	0.13M	CL2
745460408	8.0M△	24	0.13M	CL2
745460409	9.0M△	24	0.15M	CL2
745460410	10.0M△	24	0.15M	CL2
745460415	15.0M△	24	0.15M	CL2

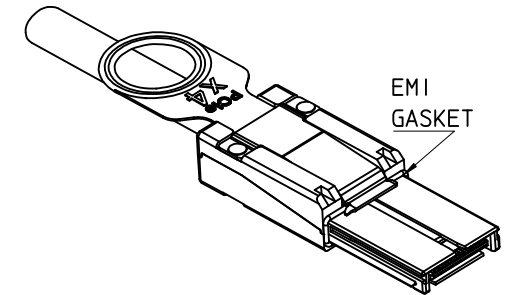

NOTES:

- MATERIAL=
 - BACKSHELLS - ZINC DIECAST
 - PULL - NYLON
 - CABLE JACKET RATING - SEE TABLE
 - LENGTH AND TOLERANCE - SEE TABLE
 - ELECTRICAL PERFORMANCE PER PCI EXPRESS EXTERNAL CABLING SPEC.
 - PLUG MATES TO RECEPTACLE 75586-0010, AND EMI GUIDE HOUSING ASSY.74540-0400
 - THIS PRODUCT MEETS THE RESTRICTION OF HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT (RoHS) DIRECTIVE (2002/95/EC).
- △. NOT COMPLIANT WITH INSERTION LOSS SPEC. PER. THE PCIE CABLING SPEC.

IPASS™ IS A TRADEMARK OF MOLEX

ADDED P/N		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
EC NO: USY2009-0263		DRAWN: JERWIN		mm		MM ONLY		1:1		METRIC		MATERIAL NO.	
2009/01/08		2009/01/08		4 PLACES ± --- ± ---		DRAWN BY BREED		DATE 2005/02/02		TITLE		SHEET NO.	
CHKD:BSCHOESTER		2009/01/08		3 PLACES ± --- ± ---		CHECKED BY DDOYE		DATE 2005/02/02		I-PASS X4 CABLE ASSEMBLY GEN 1		1 OF 3	
APPR:DDOYE		2009/01/12		2 PLACES ± 0.13 ± ---		APPROVED BY DDOYE		DATE 2005/02/02		MOLEX INCORPORATED		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
				1 PLACE ± 0.25 ± ---		ANGULAR ± 1/2°		SEE TABLE		SD-74546-400			
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS									

9

8

7

6


5

4

3

2

1

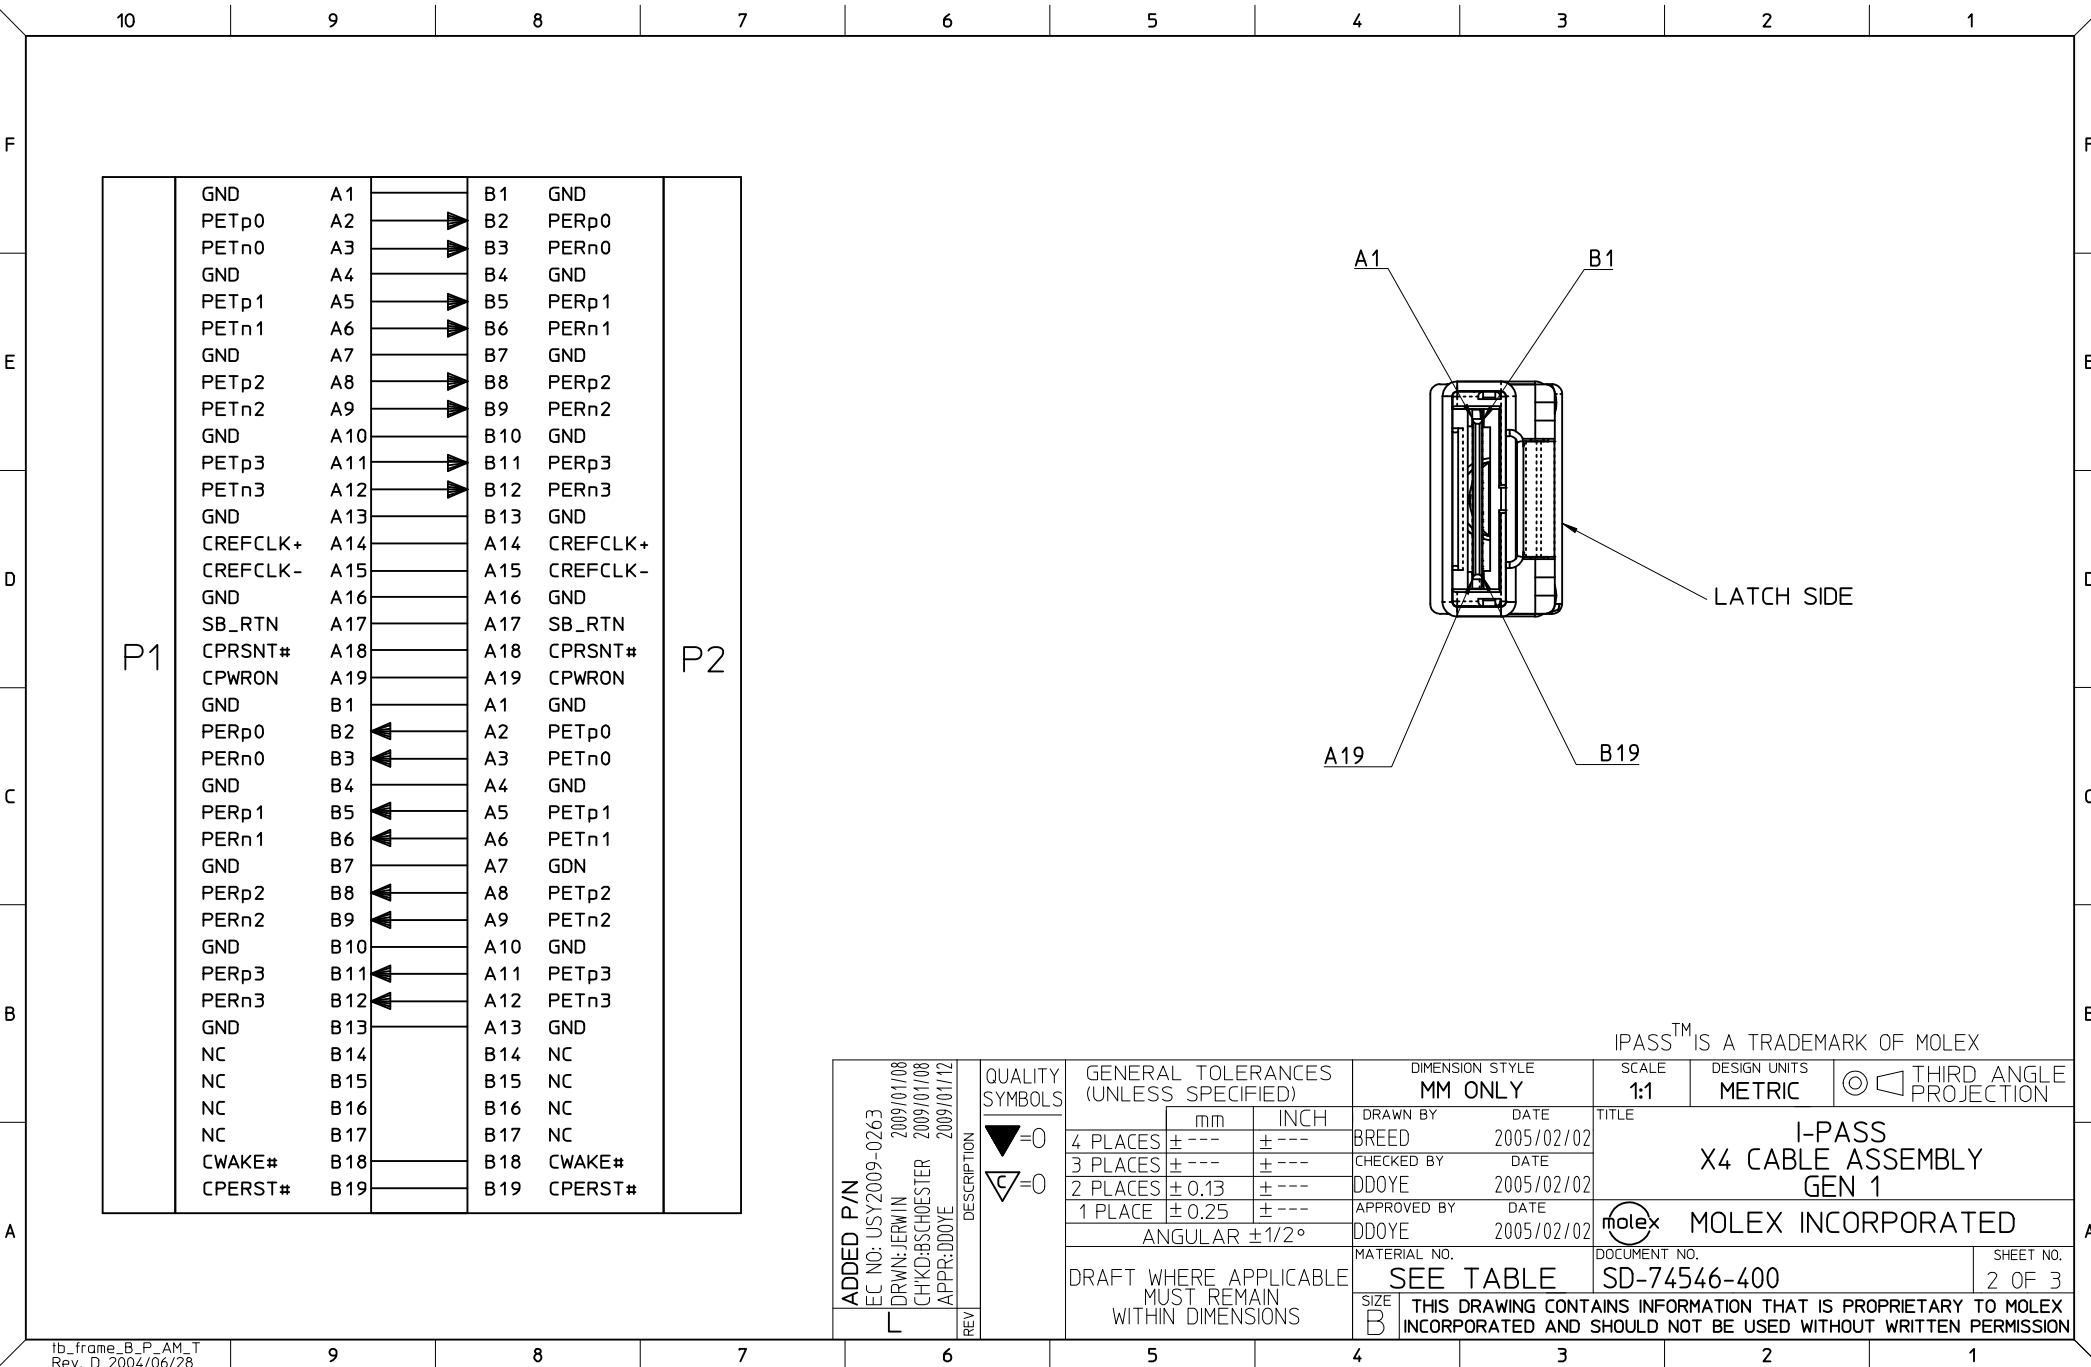

ADDED P/N EC NO: USY2009-0263 DRAWN: JERWIN 2009/01/08 CHKD: HSCHOESTER 2009/01/08 APPR: DDOYE 2009/01/12	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
					DRAWN BY BREED	DATE 2005/02/02	TITLE I-PASS X4 CABLE ASSEMBLY GEN 1			
					CHECKED BY DDOYE	DATE 2005/02/02				
					APPROVED BY DDOYE	DATE 2005/02/02	MOLEX MOLEX INCORPORATED			
			ANGULAR ±1/2°		MATERIAL NO. SEE TABLE					DOCUMENT NO. SD-74546-400
REV			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE B	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

IPASS™ IS A TRADEMARK OF MOLEX



MOLEX INCORPORATED

SHEET NO.
2 OF 3

10

9

8

7

6


5

4

3

2

74546

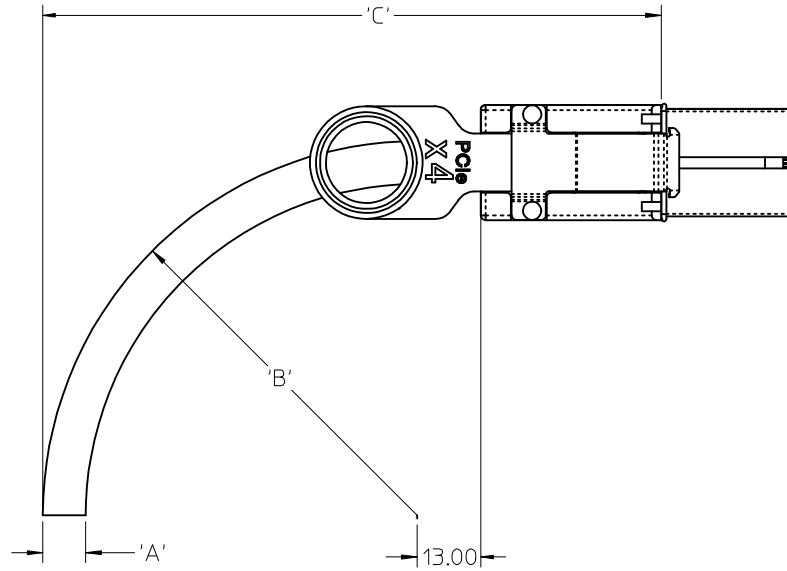

	CABLE GAUGE	24	26	28
A	CABLE DIAMETER	10.54	9.53	8.75
B	MINIMUM OUTER RADIUS	42.00	38.00	35.00
C	FACEPLATE TO OUTER RADIUS	91.86	87.86	84.86

IPASS™ IS A TRADEMARK OF MOLEX

ADDED P/N EC NO: USY2009-0263 DRWN: JERWIN 2009/01/08 CHKD: BSCHOESTER 2009/01/08 APPR: DDOYE 2009/01/12	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY BREED	DATE 2005/02/02	TITLE I-PASS X4 CABLE ASSEMBLY GEN 1				
			4 PLACES	± ---	± ---	CHECKED BY DDOYE	DATE 2005/02/02					
			3 PLACES	± ---	± ---	APPROVED BY DDOYE		DATE 2005/02/02	MOLEX MOLEX INCORPORATED			
			2 PLACES	± 0.13	± ---							
			1 PLACE	± 0.25	± ---	MATERIAL NO. SEE TABLE	DOCUMENT NO. SD-74546-400	SHEET NO. 3 OF 3				
			ANGULAR ±1/2°			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
REV			SIZE B									

9

8

7

6

5

4

3

2

1

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9