

## GENERAL DESCRIPTION

### AVX SA Series


#### Conformally Coated Axial Leaded MLC

**Temperature Coefficients:** C0G (NP0), X7R, X5R, Z5U

10, 50, 100, 200 Volts

**Case Material:** Epoxy (Flame Retardant to UL Bulletin 492, Par. 280)

**Lead Material:** Solderable


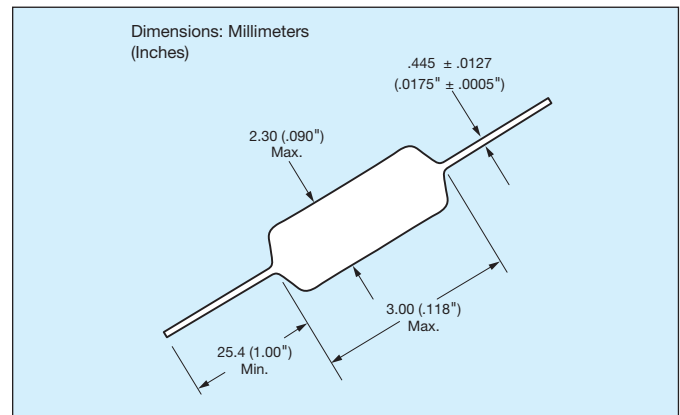


## HOW TO ORDER

| SA10                                         | 5                                          | E                                              | 104                                                                                                                                                                                                                                    | Z                                                                                                                                                                                                                 | A                   | R                                                                         |
|----------------------------------------------|--------------------------------------------|------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|---------------------------------------------------------------------------|
| <b>Conformal Axial Size</b>                  | <b>Voltage</b>                             | <b>Dielectric</b>                              | <b>Capacitance</b>                                                                                                                                                                                                                     | <b>Capacitance Tolerance</b>                                                                                                                                                                                      | <b>Failure Rate</b> | <b>Leads</b>                                                              |
| SA05<br>SA10<br>SA11<br>SA20<br>SA30<br>SA40 | Z = 10V<br>5 = 50V<br>1 = 100V<br>2 = 200V | A = C0G (NP0)<br>C = X7R<br>D = X5R<br>E = Z5U | First two digits are the significant figures of capacitance. Third digit indicates the additional number of zeros. For example, order 100,000 pF as 104. (For values below 10pF use "R" in place of decimal point, e.g., 1R4 = 1.4pF.) | C0G (NP0):<br>C = ±.25pF<br>D = ±.5pF<br>F = ±1%<br>G = ±2%<br>J = ±5%<br>K = ±10%<br><br>X7R:<br>J = ±5%<br>K = ±10%<br>M = ±20%<br><br>X5R:<br>K = ±10%<br>M = ±20%<br><br>Z5U:<br>M = ±20%<br>Z = +80%<br>-20% | A = Not Applicable  | Standard (Solderable)<br>R = RoHS Compliant<br>A = Standard<br>Solderable |

## MARKING (EXAMPLE)

SpinGuard marking includes full date code/lot code identification. A first in the industry, this format provides complete traceability to all manufacturing processes involving the basic chip and final assembly. Total Shipment traceability is also provided.

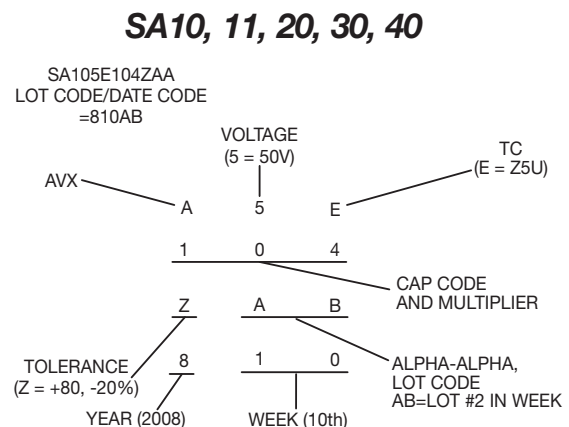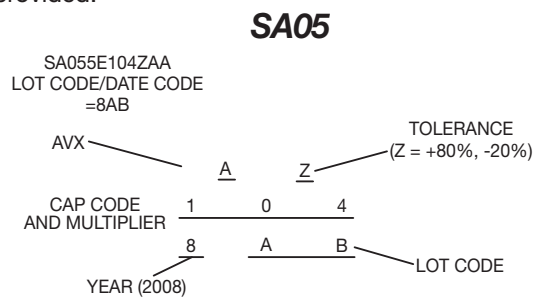

## PACKAGING REQUIREMENTS

- A = Standard Reels (see Page 48)
- B = 1000 piece reels (distributors only, tight tolerance only)
- C = Ammo Pack (see Page 48)
- D thru J = See Special Lead Configurations (Page 41)
- M = 26mm tape and reel
- N = 26mm ammo pack
- R = RoHS, Standard reels (See page 48)

# Axial Leads/SpinGuard®



## C0G (NP0) Dielectric

### SIZE AND CAPACITANCE SPECIFICATIONS

Dimensions: Millimeters (Inches)

| AVX Style            |                                              | SA05             |     | SA10             |     |    | SA11             |    |     | SA20             |     | SA30             |     | SA40             |  |
|----------------------|----------------------------------------------|------------------|-----|------------------|-----|----|------------------|----|-----|------------------|-----|------------------|-----|------------------|--|
| Length (L)           |                                              | 3.00<br>(.118")  |     | 4.32<br>(.170")  |     |    | 4.32<br>(.170")  |    |     | 6.60<br>(.260")  |     | 7.37<br>(.290")  |     | 10.16<br>(.400") |  |
| Diameter (D)         |                                              | 2.30<br>(.090")  |     | 2.54<br>(.100")  |     |    | 3.05<br>(.120")  |    |     | 2.54<br>(.100")  |     | 3.81<br>(.150")  |     | 3.81<br>(.150")  |  |
| Lead Diameter        |                                              | .445<br>(.0175") |     | .445<br>(.0175") |     |    | .445<br>(.0175") |    |     | .445<br>(.0175") |     | .445<br>(.0175") |     | .445<br>(.0175") |  |
| Lead Length          |                                              | 25.4<br>(1.00")  |     | 25.4<br>(1.00")  |     |    | 25.4<br>(1.00")  |    |     | 25.4<br>(1.00")  |     | 25.4<br>(1.00")  |     | 25.4<br>(1.00")  |  |
| Cap. in pF           | Typical AVX Part Nos.                        | WVDC             |     | WVDC             |     |    | WVDC             |    |     | WVDC             |     | WVDC             |     | WVDC             |  |
|                      |                                              | 200              | 100 | 200              | 100 | 50 | 100              | 50 | 100 | 50               | 100 | 50               | 100 | 50               |  |
| 1.0*<br>↓<br>9.1*    | SA102A1R0DAR<br>↓<br>SA102A9R1DAR            |                  |     |                  |     |    |                  |    |     |                  |     |                  |     |                  |  |
| 10<br>12<br>15       | SA102A100JAR<br>SA102A120JAR<br>SA102A150JAR |                  |     |                  |     |    |                  |    |     |                  |     |                  |     |                  |  |
| 18<br>22<br>27       | SA102A180JAR<br>SA102A220JAR<br>SA102A270JAR |                  |     |                  |     |    |                  |    |     |                  |     |                  |     |                  |  |
| 33<br>39<br>47       | SA102A330JAR<br>SA102A390JAR<br>SA102A470JAR |                  |     |                  |     |    |                  |    |     |                  |     |                  |     |                  |  |
| 56<br>68<br>82       | SA102A560JAR<br>SA102A680JAR<br>SA102A820JAR |                  |     |                  |     |    |                  |    |     |                  |     |                  |     |                  |  |
| 100<br>120<br>150    | SA102A101JAR<br>SA102A121JAR<br>SA101A151JAR |                  |     |                  |     |    |                  |    |     |                  |     |                  |     |                  |  |
| 180<br>220<br>270    | SA101A181JAR<br>SA101A221JAR<br>SA101A271JAR |                  |     |                  |     |    |                  |    |     |                  |     |                  |     |                  |  |
| 330<br>390<br>470    | SA101A331JAR<br>SA101A391JAR<br>SA101A471JAR |                  |     |                  |     |    |                  |    |     |                  |     |                  |     |                  |  |
| 560<br>680<br>820    | SA101A561JAR<br>SA101A681JAR<br>SA101A821JAR |                  |     |                  |     |    |                  |    |     |                  |     |                  |     |                  |  |
| 1000<br>1200<br>1500 | SA105A102JAR<br>SA201A122JAR<br>SA201A152JAR |                  |     |                  |     |    |                  |    |     |                  |     |                  |     |                  |  |
| 1800<br>2200<br>2700 | SA205A182JAR<br>SA301A222JAR<br>SA301A272JAR |                  |     |                  |     |    |                  |    |     |                  |     |                  |     |                  |  |
| 3300<br>3900<br>4700 | SA301A332JAR<br>SA301A392JAR<br>SA305A472JAR |                  |     |                  |     |    |                  |    |     |                  |     |                  |     |                  |  |
| 5600<br>6800<br>8200 | SA401A562JAR<br>SA401A682JAR<br>SA405A822JAR |                  |     |                  |     |    |                  |    |     |                  |     |                  |     |                  |  |
| 10,000<br>12,000     | SA405A103JAR<br>SA405A123JAR                 |                  |     |                  |     |    |                  |    |     |                  |     |                  |     |                  |  |

For other tolerances see Part No. Codes  
For other voltages see Part No. Codes  
AVX Style

= Industry preferred values

\*"C&D" Tolerance Only

### SIZE AND CAPACITANCE SPECIFICATIONS

Dimensions: Millimeters (Inches)

| AVX Style     |                       | SA05             |     |    | SA10             |     |    | SA11             |    | SA20             |    | SA30             |    | SA40             |    |
|---------------|-----------------------|------------------|-----|----|------------------|-----|----|------------------|----|------------------|----|------------------|----|------------------|----|
| Length (L)    |                       | 3.00<br>(.118")  |     |    | 4.32<br>(.170")  |     |    | 4.32<br>(.170")  |    | 6.60<br>(.260")  |    | 7.37<br>(.290")  |    | 10.16<br>(.400") |    |
| Diameter (D)  |                       | 2.30<br>(.090")  |     |    | 2.54<br>(.100")  |     |    | 3.05<br>(.120")  |    | 2.54<br>(.100")  |    | 3.81<br>(.150")  |    | 3.81<br>(.150")  |    |
| Lead Diameter |                       | .445<br>(.0175") |     |    | .445<br>(.0175") |     |    | .445<br>(.0175") |    | .445<br>(.0175") |    | .445<br>(.0175") |    | .445<br>(.0175") |    |
| Lead Length   |                       | 25.4<br>(1.00")  |     |    | 25.4<br>(1.00")  |     |    | 25.4<br>(1.00")  |    | 25.4<br>(1.00")  |    | 25.4<br>(1.00")  |    | 25.4<br>(1.00")  |    |
| Cap. in pF    | Typical AVX Part Nos. | WVDC             |     |    | WVDC             |     |    | WVDC             |    | WVDC             |    | WVDC             |    | WVDC             |    |
|               |                       | 200              | 100 | 50 | 200              | 100 | 50 | 100              | 50 | 100              | 50 | 100              | 50 | 100              | 50 |
| 220           | SA102C221KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 270           | SA102C271KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 330           | SA102C331KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 390           | SA102C391KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 470           | SA102C471KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 560           | SA101C561KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 680           | SA101C681KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 820           | SA101C821KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 1000          | SA101C102KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 1200          | SA101C122KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 1500          | SA101C152KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 1800          | SA101C182KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 2200          | SA101C222KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 2700          | SA101C272KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 3300          | SA101C332KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 3900          | SA101C392KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 4700          | SA101C472KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 5600          | SA101C562KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 6800          | SA101C682KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 8200          | SA105C822KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 10,000        | SA105C103KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 12,000        | SA105C123KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 15,000        | SA105C153KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 18,000        | SA105C183KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 22,000        | SA105C223KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 27,000        | SA105C273KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 33,000        | SA105C333KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 39,000        | SA105C393KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 47,000        | SA105C473KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 56,000        | SA115C563KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 68,000        | SA115C683KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 82,000        | SA115C823KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 100,000       | SA115C104KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 120,000       | SA305C124KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 150,000       | SA305C154KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 180,000       | SA305C184KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 220,000       | SA305C224KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 270,000       | SA305C274KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 330,000       | SA305C334KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |
| 470,000       | SA405C474KAR          |                  |     |    |                  |     |    |                  |    |                  |    |                  |    |                  |    |

For other tolerances see Part No. Codes  
For other voltages see Part No. Codes  
AVX Style

= Industry preferred values

### SIZE AND CAPACITANCE SPECIFICATIONS

Dimensions: Millimeters (Inches)

| AVX Style                      | SA05                                         | SA10             | SA11             | SA20             | SA30             | SA40             |
|--------------------------------|----------------------------------------------|------------------|------------------|------------------|------------------|------------------|
| Length (L)                     | 3.00<br>(.118")                              | 4.32<br>(.170")  | 4.32<br>(.170")  | 6.60<br>(.260")  | 7.37<br>(.290")  | 10.16<br>(.400") |
| Diameter (D)                   | 2.30<br>(.090")                              | 2.54<br>(.100")  | 3.05<br>(.120")  | 2.54<br>(.100")  | 3.81<br>(.150")  | 3.81<br>(.150")  |
| Lead Diameter                  | .445<br>(.0175")                             | .445<br>(.0175") | .445<br>(.0175") | .445<br>(.0175") | .445<br>(.0175") | .445<br>(.0175") |
| Lead Length                    | 25.4<br>(1.00")                              | 25.4<br>(1.00")  | 25.4<br>(1.00")  | 25.4<br>(1.00")  | 25.4<br>(1.00")  | 25.4<br>(1.00")  |
| Cap. in pF                     | Typical AVX Part Nos.                        | WVDC 50          | WVDC 100 50      | WVDC 100 50      | WVDC 100 50      | WVDC 100 50      |
| 10,000<br>15,000<br>22,000     | SA105E103ZAR<br>SA105E153ZAR<br>SA105E223ZAR |                  |                  |                  |                  |                  |
| 33,000<br>47,000<br>68,000     | SA105E333ZAR<br>SA105E473ZAR<br>SA105E683ZAR |                  |                  |                  |                  |                  |
| *100,000<br>150,000<br>220,000 | SA105E104ZAR<br>SA105E154ZAR<br>SA105E224ZAR |                  |                  |                  |                  |                  |
| 330,000<br>470,000<br>680,000  | SA115E334ZAR<br>SA305E474ZAR<br>SA305E684ZAR |                  |                  |                  |                  |                  |
| 820,000<br>1,000,000           | SA305E824ZAR<br>SA305E105ZAR                 |                  |                  |                  |                  |                  |

For other tolerances see Part No. Codes  
For other voltages see Part No. Codes  
AVX Style

= Industry preferred values

\*Preferred Industry Decoupling Capacitor — Insertable on .300" centers.

SA105E104ZAA

# Axial Leads/SpinGuard®



## X5R Dielectric

### SIZE AND CAPACITANCE SPECIFICATIONS

Dimensions: Millimeters (Inches)




| AVX Style       |                       | SA10             |
|-----------------|-----------------------|------------------|
| Length (L)      |                       | 4.32<br>(.170")  |
| Diameter (D)    |                       | 2.54<br>(.100")  |
| Lead Diameter   |                       | .445<br>(.0175") |
| Lead Length     |                       | 25.4<br>(1.00")  |
| Cap. in $\mu$ F | Typical AVX Part Nos. | WVDC 10          |
| 1.8             | SA10ZD185KAR          |                  |
| 2.7             | SA10ZD275KAR          |                  |
| 3.3             | SA10ZD335KAR          |                  |
| 4.7             | SA10ZD475KAR          |                  |

For other tolerances see Part No. Codes  
For other voltages see Part No. Codes  
AVX Style


 = Industry preferred values

### SPECIAL LEAD CONFIGURATIONS

Dimensions — Body dimensions Per Standard SpinGuard Configurations.  
Formed dimensions as shown for types D, E, F, G, H, I, & J configurations.

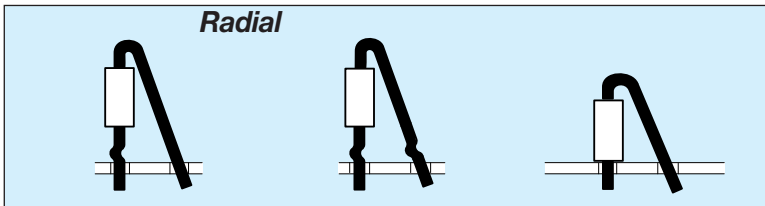

D Single Crimp      E Dual Crimp      F No Crimp



G = .300" L.S.    I = .500" L.S.  
H = .400" L.S.    J = .600" L.S.


Formed Dimensions:

|      | LEAD SPACING* | SEATED HEIGHT (Max.) |       |             |
|------|---------------|----------------------|-------|-------------|
|      | Nom.          | D & E                | F     | G, H, I & J |
| SA10 | .2"           | .525"                | .300" | .100"       |
| SA20 | .2"           | .570"                | .375" | .100"       |
| SA30 | .2"           | .580"                | .425" | .150"       |
| SA40 | .2"           | .650"                | .460" | .150"       |

\*Lead spacing can be varied by user to cover .1"- .3" spacing requirements for F, D, and E styles.

## TAPE AND REEL


| CLASS I / RS-296                 |                                     |
|----------------------------------|-------------------------------------|
| A.                               | 5mm ± 0.5mm<br>(.200" ± 0.020")     |
| B*.                              | 52.4mm ± 1.5mm<br>(2.063" ± 0.059") |
| C.                               | 6.35mm ± 0.4mm<br>(0.250" ± 0.016") |
| D <sup>1</sup> -D <sup>2</sup> . | 1.4mm<br>(0.055" MAX.)              |
| E.                               | 1.2mm<br>(0.047" MAX.)              |
| F.                               | 1.6mm<br>(0.063" MAX.)              |
| G.                               | 356mm<br>(14.00")                   |
| H.                               | 76mm<br>(3.000")                    |
| I.                               | 25.4mm<br>(1.000")                  |
| J.                               | 84mm<br>(3.300")                    |
| K.                               | 70mm<br>(2.750")                    |

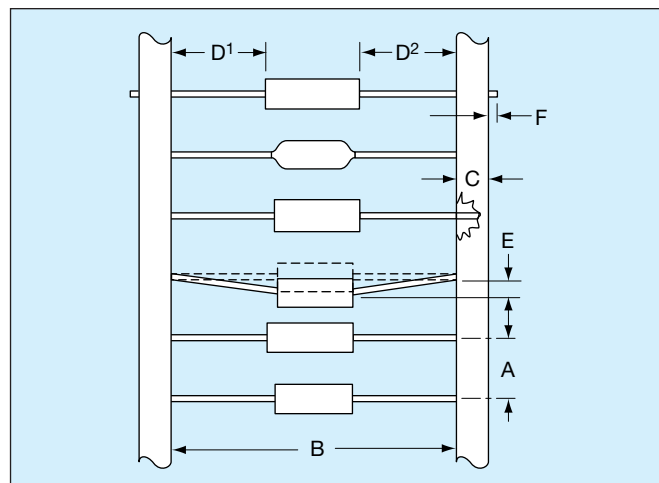

**Leader Tape:** 300mm min. (12")

**Splicing:** Tape Only

**Missing Parts:** 0.25% of component count max.-  
No consecutive missing parts

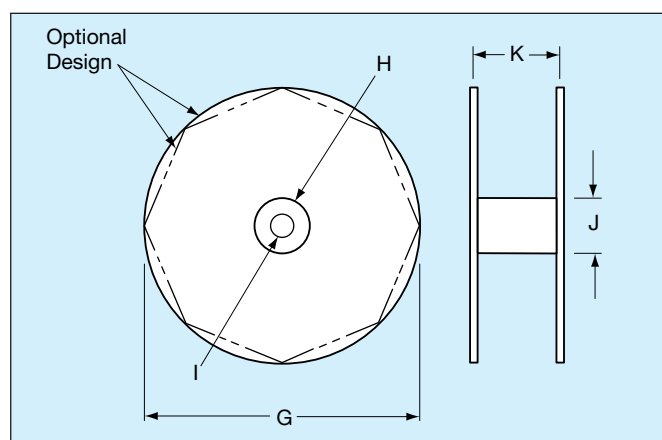

## REEL QUANTITIES (MAX.) ‡

|      |            |      |            |
|------|------------|------|------------|
| SA05 | 7,500 pcs. | MA10 | 5,000 pcs. |
| SA10 | 7,500 pcs. | MA20 | 5,000 pcs. |
| SA11 | 5,000 pcs. | MA30 | 3,000 pcs. |
| SA20 | 5,000 pcs. | MA40 | 3,000 pcs. |
| SA30 | 5,000 pcs. | MA50 | 950 pcs.   |
| SA40 | 5,000 pcs. | MA60 | 650 pcs.   |

‡ 1000 pc. reels available for distribution pack only in ±1% and ±2% tolerance.

\* Standard Tape Spacing Shown. Also available in 26.0mm + 1.5mm, - 0mm, (1.023 in. + .059 in. - 0 in.) for SpinGuards only. EIA Class I, II and III tape spacings are available for molded axials. Tape spacing for Class II is 63.5mm ± 1.5mm (2.50 in ± .059 in), and for Class III 73mm ± 1.5mm (2.87 in ± .059 in)

## ADDITIONAL PACKAGING AVAILABLE

### AMMO PACK

| Tape Spacing                                  | SA05, SA10<br>SA20 | SA11<br>SA30 | SA40        | BOX SIZES (Nominal) |                  |                   |
|-----------------------------------------------|--------------------|--------------|-------------|---------------------|------------------|-------------------|
|                                               |                    |              |             | L                   | W                | H                 |
| 52.4mm ± 1.5mm<br>(2.062" ± .059")            | 4,000 pcs.         | 2000         | 2,000 pcs.  | 255mm<br>(10.039")  | 73mm<br>(2.874") | 93mm<br>(3.661")  |
| 26.0mm + 1.5mm - 0mm<br>(1.023" + .059" - 0") | 4,000 pcs.*        | 2000         | 2,000 pcs.* | 255mm<br>(10.039")  | 48mm<br>(1.889") | 113mm<br>(4.448") |

\*SpinGuard only

## BULK PACK (MOLDED AXIALS ONLY)

|                              |                |
|------------------------------|----------------|
| MA10<br>MA20<br>MA30<br>MA40 | 100 pcs. (bag) |
| MA50<br>MA60                 | 50 pcs. (bag)  |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9