

# G3VM-61AR/DR

MOS FET Relays

Higher power, 2-A switching with a 60-V  
load voltage, DIP package.  
Low 80 mΩ ON Resistance.

- Continuous load current of 2 A.
- Switches minute analog signals.
- Dielectric strength of 2,500 Vrms between I/O.

RoHS compliant

## Application Examples



- Communication equipment
- Test & Measurement equipment
- Security equipment
- Factory Automation equipment
- Power circuit



**NEW**

**Note:** The actual product is marked differently from the image shown here.

## Terminal Arrangement/Internal Connections



**Note:** The actual product is marked differently from the image shown here.

\* The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

## List of Models

| Package type | Contact form    | Terminals                  | Load voltage<br>(peak value) * | Model          | Minimum package quantity |                          |
|--------------|-----------------|----------------------------|--------------------------------|----------------|--------------------------|--------------------------|
|              |                 |                            |                                |                | Number per stick         | Number per tape and reel |
| DIP4         | 1a<br>(SPST-NO) | PCB terminals              | 60 V                           | G3VM-61AR      | 100                      | ---                      |
|              |                 | Surface-mounting terminals |                                | G3VM-61DR      |                          |                          |
|              |                 |                            |                                | G3VM-61DR (TR) | ---                      | 1,500                    |

\* The AC peak and DC value are given for the load voltage.

## Absolute Maximum Ratings (Ta = 25°C)


| Item                | Symbol                                        | Rating | Unit        | Measurement conditions |
|---------------------|-----------------------------------------------|--------|-------------|------------------------|
| Input               | LED forward current                           | IF     | 30          | mA                     |
|                     | Repetitive peak LED forward current           | IFP    | 1           | A                      |
|                     | LED forward current reduction rate            | ΔIF/°C | -0.3        | mA/°C                  |
|                     | LED reverse voltage                           | VR     | 5           | V                      |
| Output              | Connection temperature                        | TJ     | 125         | °C                     |
|                     | Load voltage (AC peak/DC)                     | VOFF   | 60          | V                      |
|                     | Continuous load current (AC peak/DC)          | IO     | 2           | A                      |
|                     | ON current reduction rate                     | ΔIO/°C | -20         | mA/°C                  |
| Dielectric strength | Pulse ON current                              | IOP    | 6           | A                      |
|                     | Connection temperature                        | TJ     | 125         | °C                     |
|                     | Dielectric strength between I/O (See note 1.) | VI-O   | 2500        | Vrms                   |
|                     | Operating temperature                         | Ta     | -40 to +85  | °C                     |
| Storage temperature | Storage temperature                           | Tstg   | -55 to +125 | °C                     |
|                     | Soldering temperature                         | ---    | 260         | °C                     |

**Note:** 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

## Electrical Characteristics (Ta = 25°C)

| Item                  | Symbol                                      | Minimum | Typical | Maximum | Unit | Measurement conditions       |
|-----------------------|---------------------------------------------|---------|---------|---------|------|------------------------------|
| Input                 | LED forward voltage                         | VF      | 1.18    | 1.33    | 1.48 | V                            |
|                       | Reverse current                             | IR      | ---     | 10      | μA   | IF = 10 mA                   |
|                       | Capacity between terminals                  | CT      | ---     | 70      | pF   | VR = 5 V                     |
|                       | Trigger LED forward current                 | IFT     | ---     | 0.5     | 3    | mA                           |
| Output                | Maximum resistance with output ON           | RON     | ---     | 80      | 200  | mΩ                           |
|                       | Current leakage when the relay is open      | ILEAK   | ---     | 1.0     | μA   | IF = 5 mA, IO = 2 A, t < 1 s |
|                       | Capacity between terminals                  | COFF    | ---     | 250     | ---  | pF                           |
|                       | Capacity between I/O terminals              | CI-O    | ---     | 0.8     | ---  | pF                           |
| Insulation resistance | Insulation resistance between I/O terminals | RI-O    | 1000    | ---     | MΩ   | VI-O = 500 VDC, RoH ≤ 60%    |
|                       | Turn-ON time                                | TON     | ---     | 0.8     | 5    | ms                           |
| Turn-OFF time         | Turn-OFF time                               | TOFF    | ---     | 0.3     | 1    | ms                           |

**Note:** 2. Turn-ON and Turn-OFF Times




## Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.


| Item                                    | Symbol   | Minimum | Typical | Maximum | Unit |
|-----------------------------------------|----------|---------|---------|---------|------|
| Load voltage<br>(AC peak/DC)            | $V_{DD}$ | ---     | ---     | 48      | V    |
| Operating LED forward current           | $I_F$    | 5       | 10      | 25      | mA   |
| Continuous load current<br>(AC peak/DC) | $I_O$    | ---     | ---     | 2       | A    |
| Operating temperature                   | $T_a$    | -20     | ---     | 65      | °C   |

## Engineering Data


LED forward current vs.  
Ambient temperature

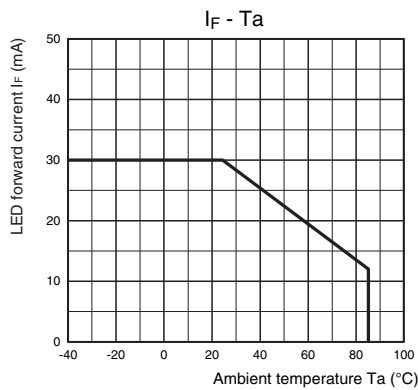


Continuous load current vs.  
Ambient temperature

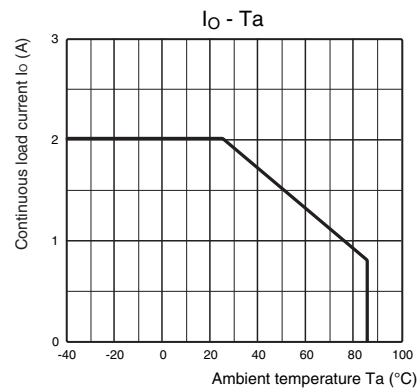


LED forward current vs.  
LED forward voltage

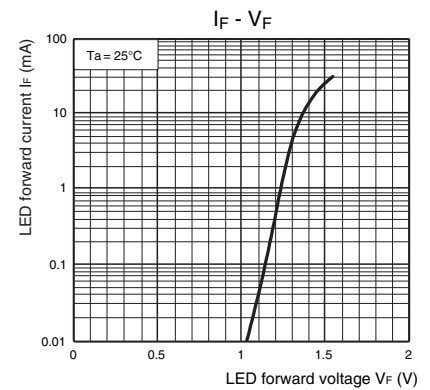


Continuous load current vs.  
On-state voltage

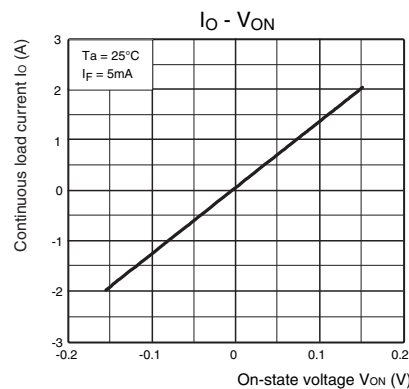


On-state resistance vs.  
Ambient temperature

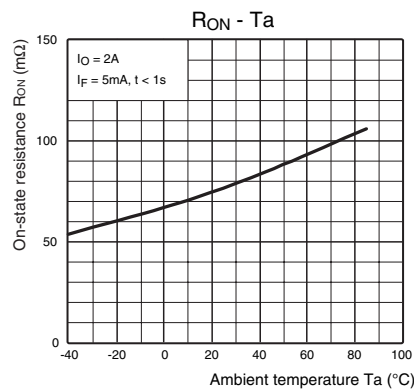


Trigger LED forward current vs.  
Ambient temperature

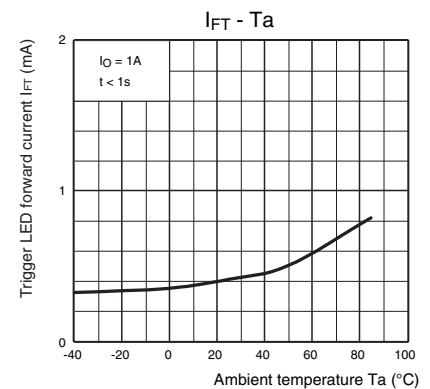


Turn ON, Turn OFF time vs.  
LED forward current

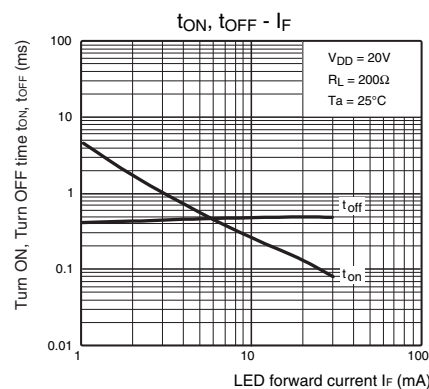

Turn ON, Turn OFF time vs.  
Ambient temperature

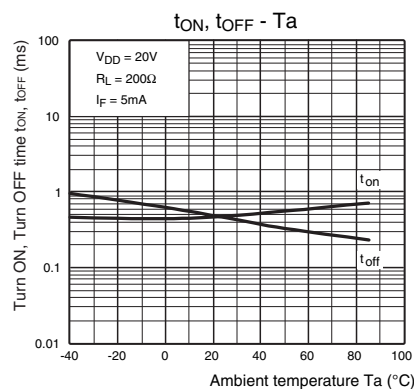

Current leakage vs.  
Ambient temperature

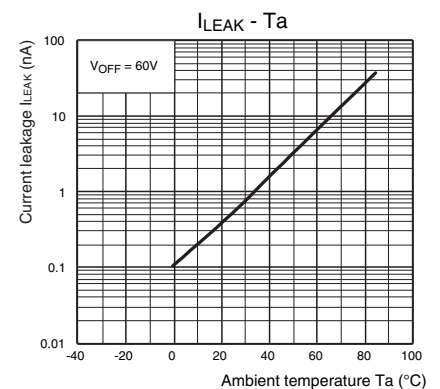


## Safety Precautions

- Refer to "Common Precautions" for all G3VM models.

## ■ Appearance

### DIP (Dual Inline Package)

DIP4



**Note:** The actual product is marked differently from the image shown here.

\* The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.


## ■ Dimensions

(Unit: mm)




### PCB Terminals

Weight: 0.25 g

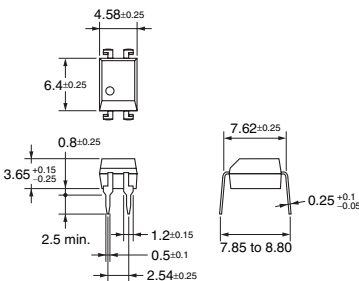


### Surface-mounting Terminals

Weight: 0.25 g

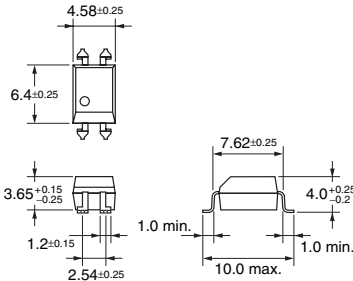


### PCB Dimensions (Bottom View)



### Actual Mounting Pad Dimensions

(Recommended Value, Top View)



**Note:** The actual product is marked differently from the image shown here.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

**Note:** Do not use this document to operate the Unit.

**OMRON Corporation**

ELECTRONIC AND MECHANICAL COMPONENTS COMPANY

Contact: [www.omron.com/ecb](http://www.omron.com/ecb)

Cat. No. **K139-E1-02**  
0412(0412)(O)

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9