


FEMALE PLUG ULTRA LOCK U12 90° ANGLED

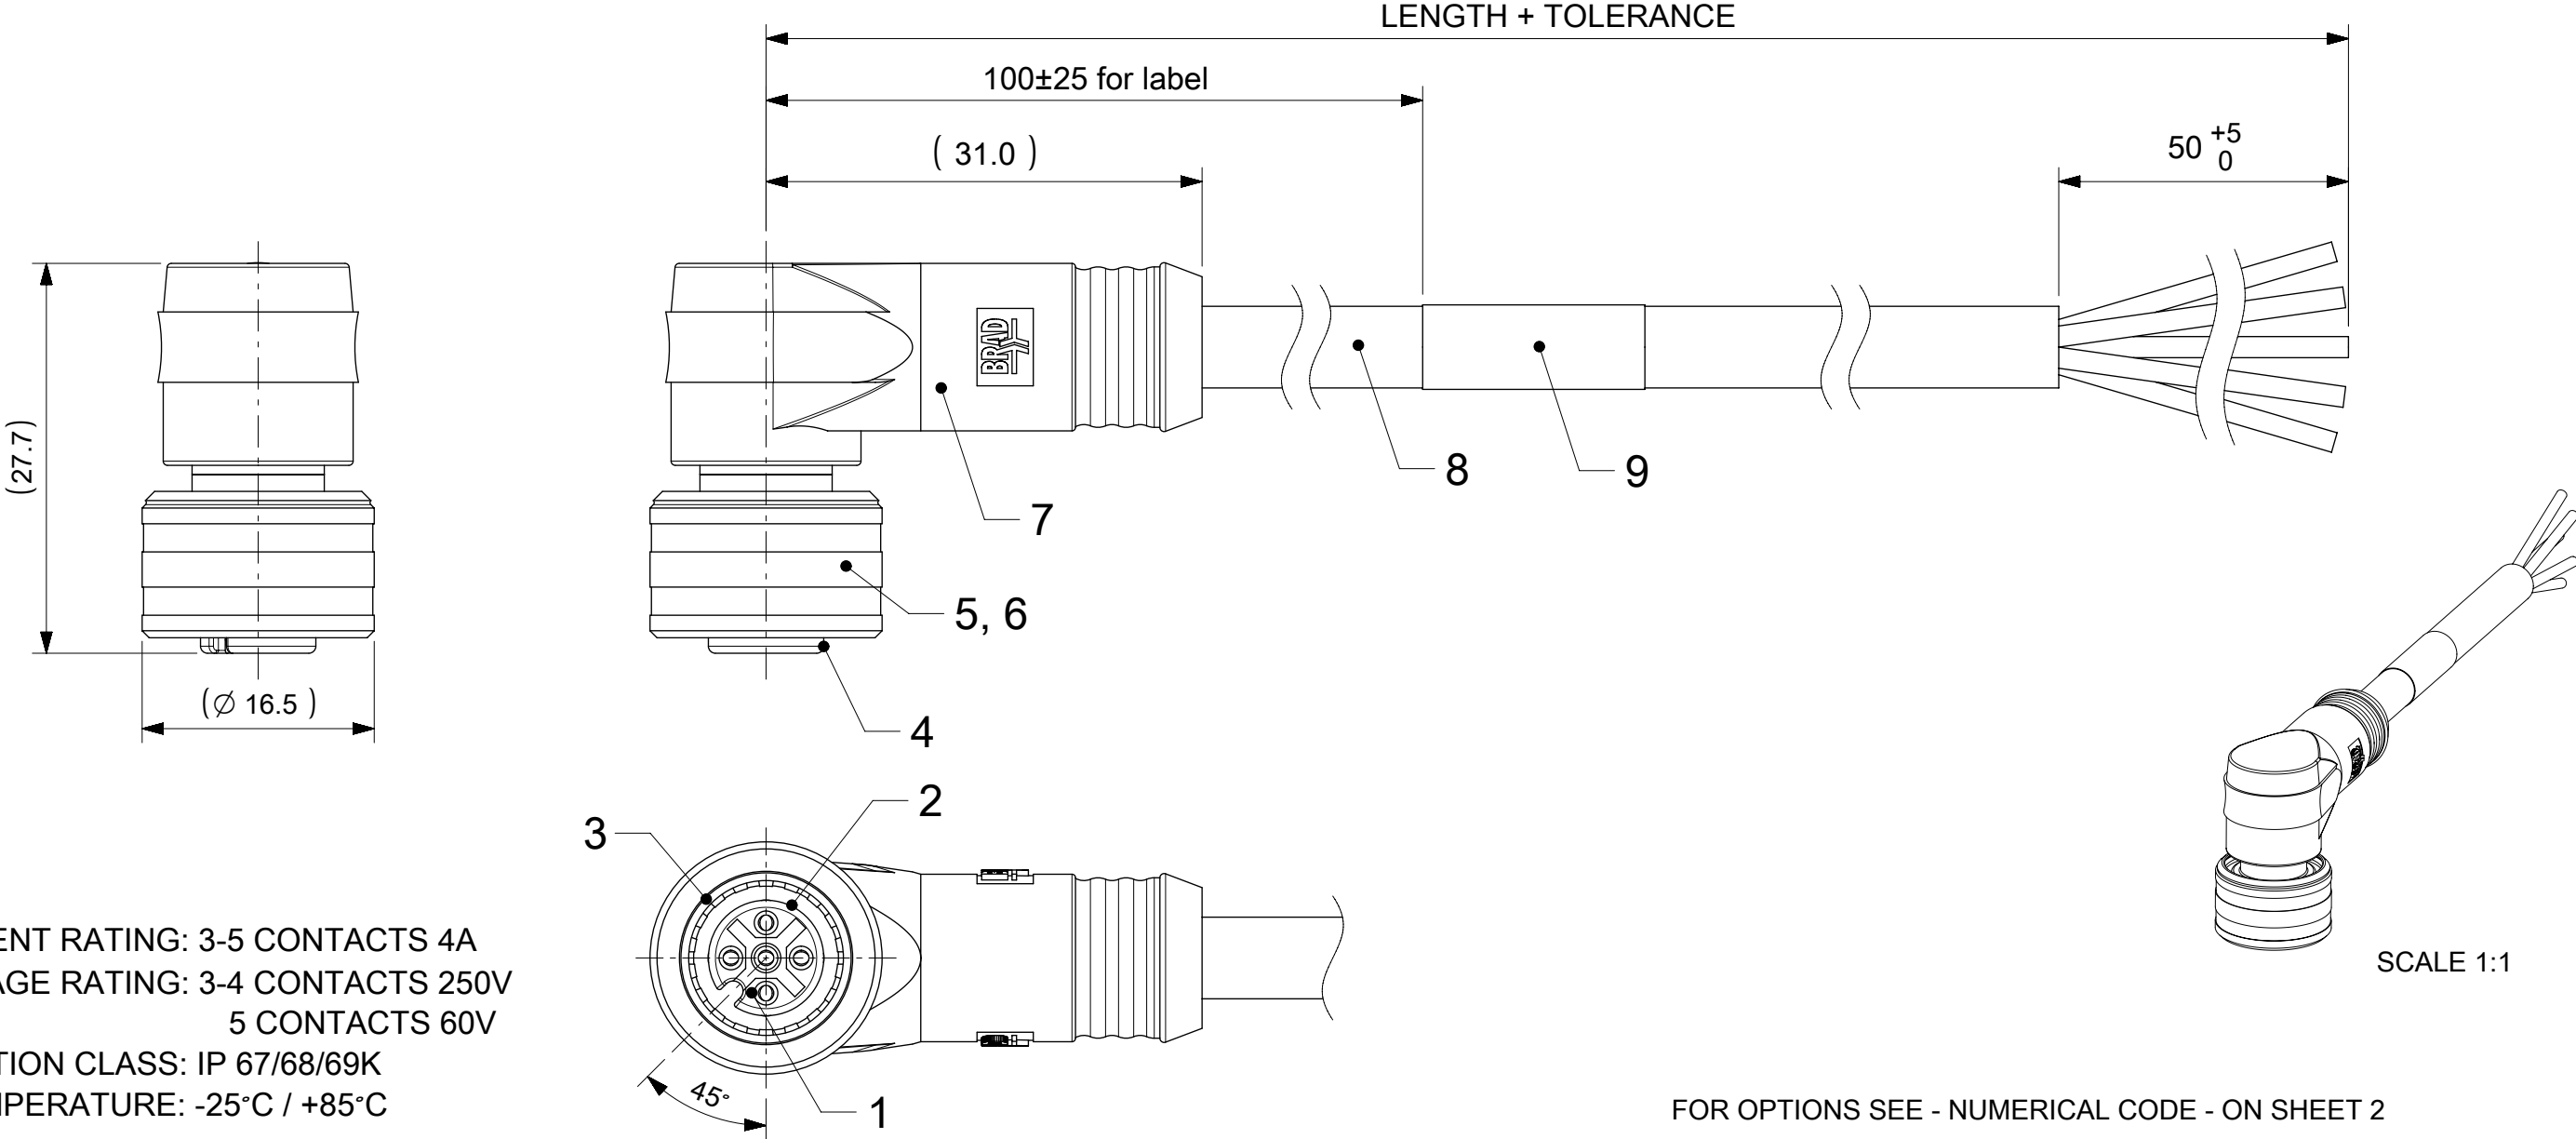

NOTES:
CURRENT RATING: 3-5 CONTACTS 4A
VOLTAGE RATING: 3-4 CONTACTS 250V
5 CONTACTS 60V
PROTECTION CLASS: IP 67/68/69K
TEMPERATURE: -25°C / +85°C

CONTACTS POSITION FRONT VIEW:

3 CONTACTS		4 CONTACTS		5 CONTACTS	
PIN	WIRE	PIN	WIRE	PIN	WIRE
1	BROWN	1	BROWN	1	BROWN
2	---	2	WHITE	2	WHITE
3	BLUE	3	BLUE	3	BLUE
4	BLACK	4	BLACK	4	BLACK
5	---	5	---	5	GREY
CODING ACCORDING TO IEC 61076-2-101					

FOR OPTIONS SEE - NUMERICAL CODE - ON SHEET 2

9	1	LABEL YELLOW	VINYL	---
8	-	CABLE	SEE SHEET 2	---
7	-	OVERMOULD BLACK	TPU	---
6	1	SLEEVE U12 INNER	BRASS	NICKEL
5	1	SLEEVE U12 OUTER	BRASS	NICKEL
4	1	INSERT FEMALE BLACK	PUR	---
3	1	SPRING U12	V4A	---
2	1	ORING GREEN	FPM	---
1	3 / 4 / 5	CONTACT M12 FEMALE	BRONZE	SELECTIVE GOLD OVER NICKEL
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	SCALE	CURRENT REV DESC:	molex		
▽ = 0	mm	2:1	EC NO: 601308	CSE U12 XP AC FE RA XM SE UNSH		
▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DRWN: SSM 2018/07/10	PRODUCT CUSTOMER DRAWING		
▽ = 0	ANGULAR TOL ± 1.0°		CHK'D: SSM 2018/07/11	DOCUMENT NUMBER		
▽ = 0	4 PLACES ±		APPR: RSILLER 2018/07/12	1200790281		
▽ = 0	2 PLACES ± 0.05		INITIAL REVISION:	DOC TYPE DOC PART REVISION		
▽ = 0	1 PLACE ± 0.3		DRWN: JMARSZALEK 2016/06/22	PSD 000 A3		
▽ = 0	0 PLACES ± 0.5		APPR: RSILLER 2016/06/29	SHEET NUMBER		
▽ = 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	GENERAL MARKET		
▽ = 0			DRAWING A3-SIZE	1 OF 2		
▽ = 0			SERIES 120079			

ENGINEERING NO. - NUMERICAL CODE (Available parts see PART LIST table. Other parts available upon request).

OPTIONS

W0X001XXXXXX

W0=U12
Ultra Lock
Single ended

Poles:
3=3 Poles
4=4 Poles
5=5 Poles

Heads style:
001=Plug Female Angled

Cable type: See Table

Units:
M=Meter

Length
Examples:
005=0.5 units
010=1 units
100=10 units

Overmold color:
Blank (Standard)=Black
A=Grey / G=Black / Y=Yellow

Ultra Lock Assembly:
Blank (Standard)=Brass, Ni Plated
8=Stainless steel, EPDM oring

H= 2 pcs. of I/D Carrier PVC Transparent
(Cables lxx & P82 always with
2 pcs. of I/D Carrier)



CABLE INFORMATION (for more information see Cable Data Sheet).

CABLE TYPE	NO. OF WIRES	CROSS SECTION	CABLE JACKET	UL	CSA	STATIC: TEMP. / BENDING RADIUS	DYNAMIC: TEMP. / BENDING RADIUS	DRAG CHAIN	SHIELD
E03	3 / 4 / 5	0.34mm²	PVC BLACK	UL 2464/1729	C22.2 I/II A/B 80°/300V	-30°C to +80°C, 10xO.D.	-10°C to +80°C, 15xO.D.	-	-
H09	3 / 4 / 5	0.34mm²	PUR BLACK LS0H	UL 21198/10493	C22.2 I/II A/B 80°/300V	-40°C to +80°C, 5xO.D.	-25°C to +80°C, 10xO.D.	2 000 000 cycles, Temp max 60°C	-
P03	3 / 4 / 5	0.34mm²	PUR / PVC BLACK	-	-	-30°C to +80°C, 7xO.D.	-5°C to +80°C, 15xO.D.	-	-

PART LIST

No.	Molex P/N	Engineering no.	Cable Length
1	1200200003	W04001E03M005	0.5m
2	1200790269	W04001E03M020	2m
3	1200790272	W04001E03M100	10m
4	1200790281	W05001E03M020	2m
5	1200790282	W05001E03M040	4m
6	1200795042	W04001E03M050	5m
7	1200795044	W05001E03M050	5m
8	1200795071	W04001P03M040	4m
9	1200795072	W04001P03M100	10m
10	1200795073	W04001P03M060	6m
11	1200795088	W05001P03M020	2m
12	1200795089	W05001P03M040	4m
13	1200795090	W05001P03M050	5m
14	1200795091	W05001P03M060	6m
15	1200795092	W05001P03M100	10m
16	1200798002	W04001E03M003	0.3m
17	1200798007	W04001P03M050	5m
18	1200798013	W04001P03M020	2m
19	1200798040	W04001E03M010	1m
20	1200798047	W03001H09M020	2m

No.	Molex P/N	Engineering no.	Cable Length
21	1200798048	W05001H09M020	2m
22	1200798051	W04001H09M020	2m
23	1200798055	W04001E03M012	1.2m
24	1200798100	W05001H09M350	35m
25	1200798122	W05001H09M030	3m
26	1200798143	W03001E03M020	2m
27	1200798144	W03001E03M050	5m
28	1200798145	W03001E03M100	10m
29	1200798159	W05001H09M050	5m
30			
31			
32			
33			
34			
35			
36			
37			
38			
39			
40			

CABLE LENGTH TOLERANCES

OVER	UP TO AND INCLUDING	TOLERANCES
0	305mm	+19mm
305mm	915mm	+45mm
915mm	1830mm	+56mm
1830mm	3660mm	+89mm
3660mm	7320mm	+165mm
7320mm	14640mm	+317mm
14640mm	30500mm	+610mm
30500mm	>	+2% of finished length

SYMBOLS

▽ = 0

▽ = 0

▽ = 0

▽ = 0

▼ = 0

▽ = 0

⊠ = 0

■ = 0

▽ = 0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS

mm

SCALE

1:1

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL ± 1.0 °

4 PLACES ±

3 PLACES ±

2 PLACES ± 0.05

1 PLACE ± 0.3

0 PLACES ± 0.5

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC:

EC NO: 601308

DRWN: SSM 2018/07/10

CHK'D: SSM 2018/07/11

APPR: RSILLER 2018/07/12

INITIAL REVISION:

DRWN: JMARSZALEK 2016/06/22

APPR: RSILLER 2016/06/29

THIRD ANGLE PROJECTION

DRAWING

A3-SIZE

SERIES

120079

DOCUMENT NUMBER

1200790281

DOC TYPE

PSD

DOC PART

000

REVISION

A3

MATERIAL NUMBER

CUSTOMER

GENERAL MARKET

SHEET NUMBER

2 OF 2

DOCUMENT STATUS

P1

RELEASE DATE

2018/07/12 08:35:08

10987654321

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9