

AMPHENOL PART NUMBER
CONFIGURATION
UE86-3G2620-X0X61

LIGHT PIPE OPTION

- 0 - NO LIGHT PIPE
1 - 4 LP PER 2X1, NORMAL ORIENTATION
2 - 2 INNER LP PER 2X1, NORMAL ORIENTATION
3 - 2 OUTER LP PER 2X1, NORMAL ORIENTATION
4 - 4 LP PER 2X1, REVERSING ORIENTATION
5 - 2 INNER LP PER 2X1, REVERSING ORIENTATION
6 - 2 OUTER LP PER 2X1, REVERSING ORIENTATION
7 - 3 LP PER 2X1, 2 OUTER LP, NORMAL ORIENTATION
8 - 3 LP PER 2X1, 2 OUTER LP, REVERSING ORIENTATION



PACKAGING

- 1 - TRAY PACKAGING (STACKED)


PLATING OPTIONS FOR CONNECTOR

- 2 - 30µ" GOLD PLATING ON MATING AREA
15~100µ" MATTE TIN ON TERMINATION
3 - 30µ" GOLD PLATING ON MATING AREA
150~300µ" MATTE TIN ON TERMINATION
5 - 15µ" GOLD PLATING ON MATING AREA
15~100µ" MATTE TIN ON TERMINATION
6 - 15µ" GOLD PLATING ON MATING AREA
150~300µ" MATTE TIN ON TERMINATION


PART NUMBER
(LAST DIGIT INDICATING
PACKAGING TYPE, NOT
DATE CODE)

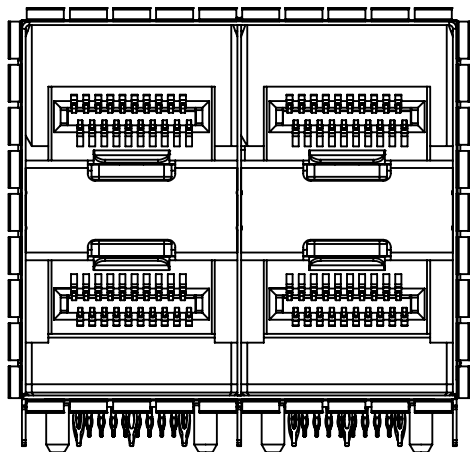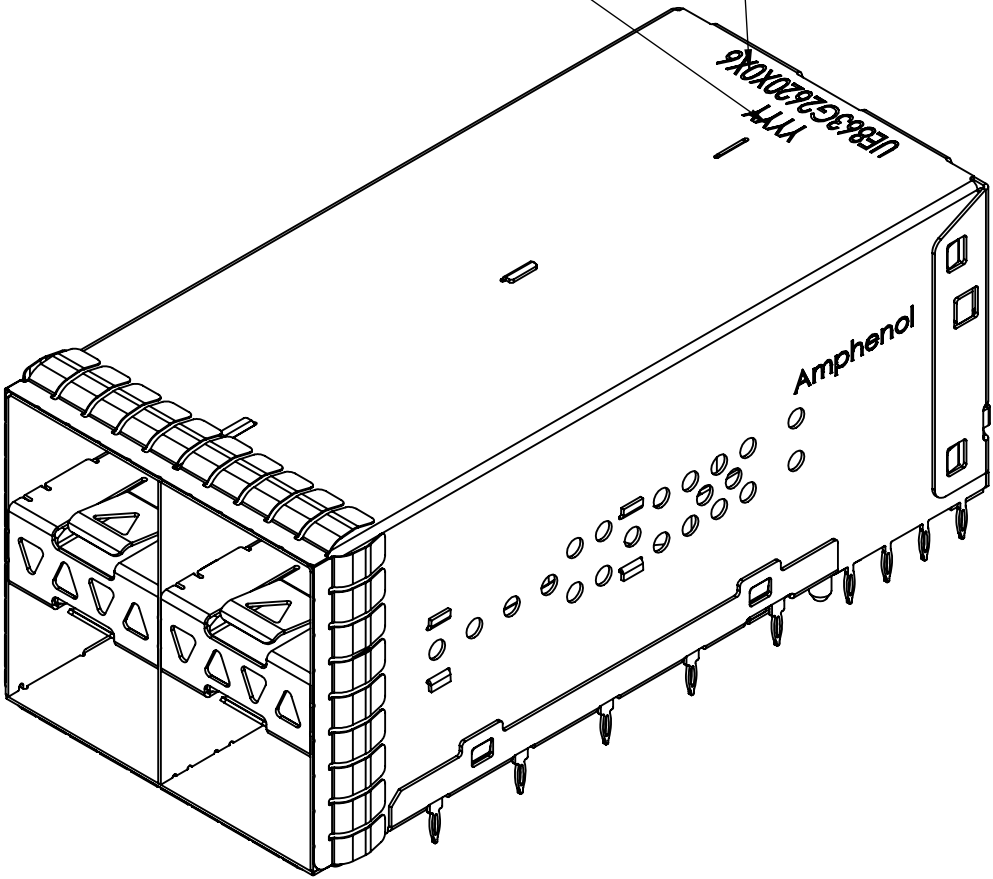


NO LIGHT PIPES
UE86-3G2620-00X61

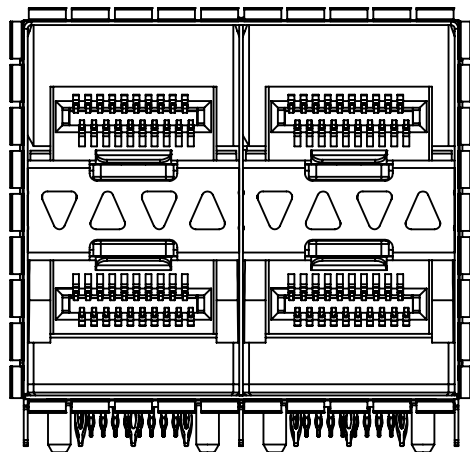


4 LIGHT PIPES
UE86-3G2620-10X61

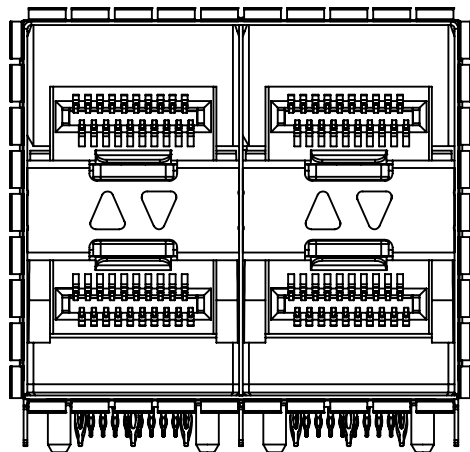


2 INNER LIGHT PIPES
UE86-3G2620-20X61

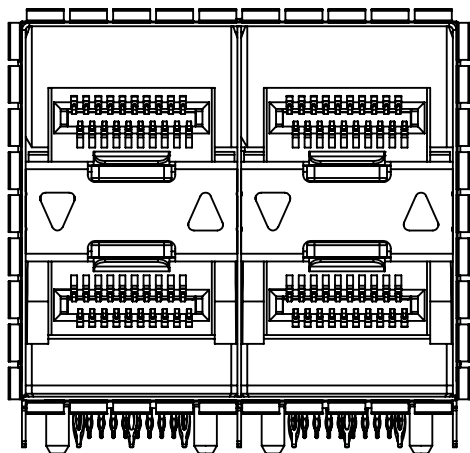


2 OUTER LIGHT PIPES
UE86-3G2620-30X61

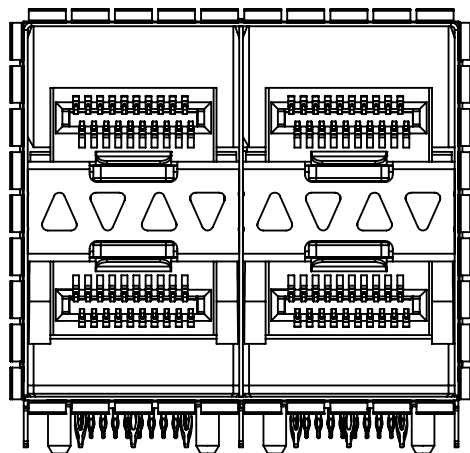


4 LIGHT PIPES UPSIDE DOWN
UE86-3G2620-40X61

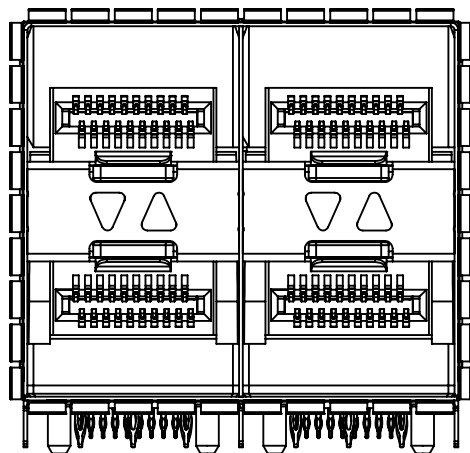


2 INNER LIGHT PIPES UPSIDE DOWN
UE86-3G2620-50X61

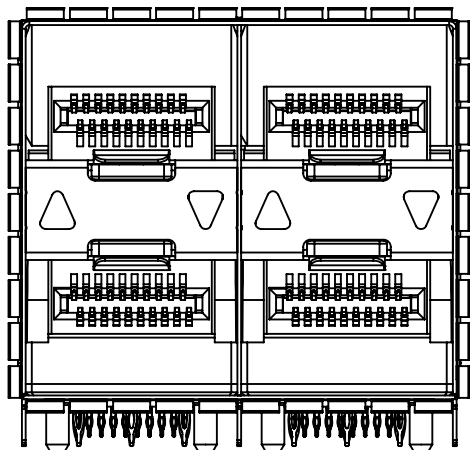

2 OUTER LIGHT PIPES UPSIDE DOWN
UE86-3G2620-60X61

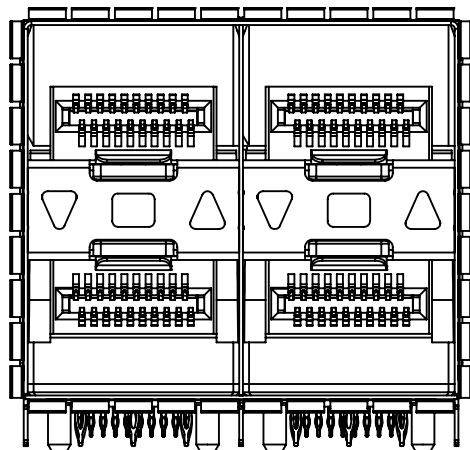

3 LIGHT PIPES
UE86-3G2620-70X61

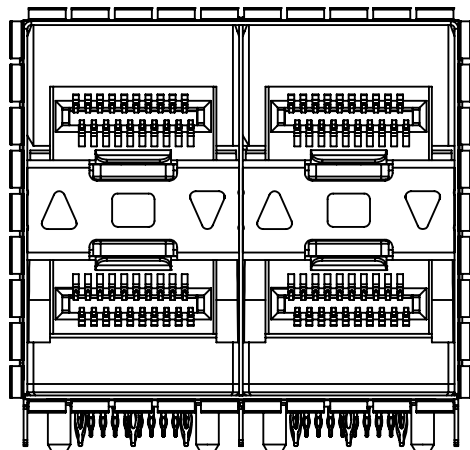

3 LIGHT PIPES UPSIDE DOWN
UE86-3G2620-80X61

MATERIAL: (RoHS COMPLIANT)

1. CAGE - PRESS FIT: COPPER ALLOY (NICKEL SILVER)
2. CONNECTOR - PRESS FIT:
-PLASTIC HOUSING: LCP, FLAMMABILITY RATING UL94-V0.
-CONTACTS: PHOSPHOR BRONZE
3. LIGHT PIPE: CLEAR POLYCARBONATE, FLAMMABILITY RATING UL94-V0.
4. PACKAGING: TRAY PACKAGING.
5. TEMPERATURE RANGE: -40°C TO +85°C








THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

REVISIONS				
REV.	ECN	DESCRIPTION	DATE	APPROVED
C		UPDATE NOTES	AUG 15/14	J.SI
D		CHANGED PCB THICKNESS	NOV 03/15	J.SI
E		REMOVED DIM. ZONE C2, SHEET 2 OF 4	OCT 31/16	J.SI


UNLESS SPECIFIED OTHERWISE		DRAWN	P. OU	FEB10/14	Amphenol High Speed Interconnects A Division of Amphenol Corp. www.amphenolcanada.com						
DIMENSIONS ARE IN MILLIMETERS		CHECKED	J. SI	NOV03/15							
REFERENCE IN PARENTHESES		M.E. APP'D			2X2 SFP ULTRAPORT WITH LIGHT PIPE OPTIONS AND EMI SPRING FINGER						
GENERAL TOLERANCES		Q.A. APP'D									
1 DECIMAL PLACE	±0.25	DWG APP'D		J. SI	NOV03/15	DWG. NO.					
2 DECIMAL PLACE	±0.15	MATERIAL AND FINISH		SEE NOTES							
3 DECIMAL PLACE	±0.10	REF.		ECN Exxxxx		P-UE86-3G2620-X0X61					
ANGULAR DEGREES	±1°	THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING							
ENG. REL. NO.						CODE ID NO.	03554	DWG SIZE: C	SCALE: 2:1	SHEET 1 OF 4	REV E

REVISIONS				
REV.	ECN	DESCRIPTION	DATE	APPROVED
C		UPDATE NOTES	AUG 15/14	J.SI
D		CHANGED PCB THICKNESS	NOV 03/15	J.SI
E		REMOVED DIM. ZONE C2, SHEET 2 OF 4	OCT 31/16	J.SI

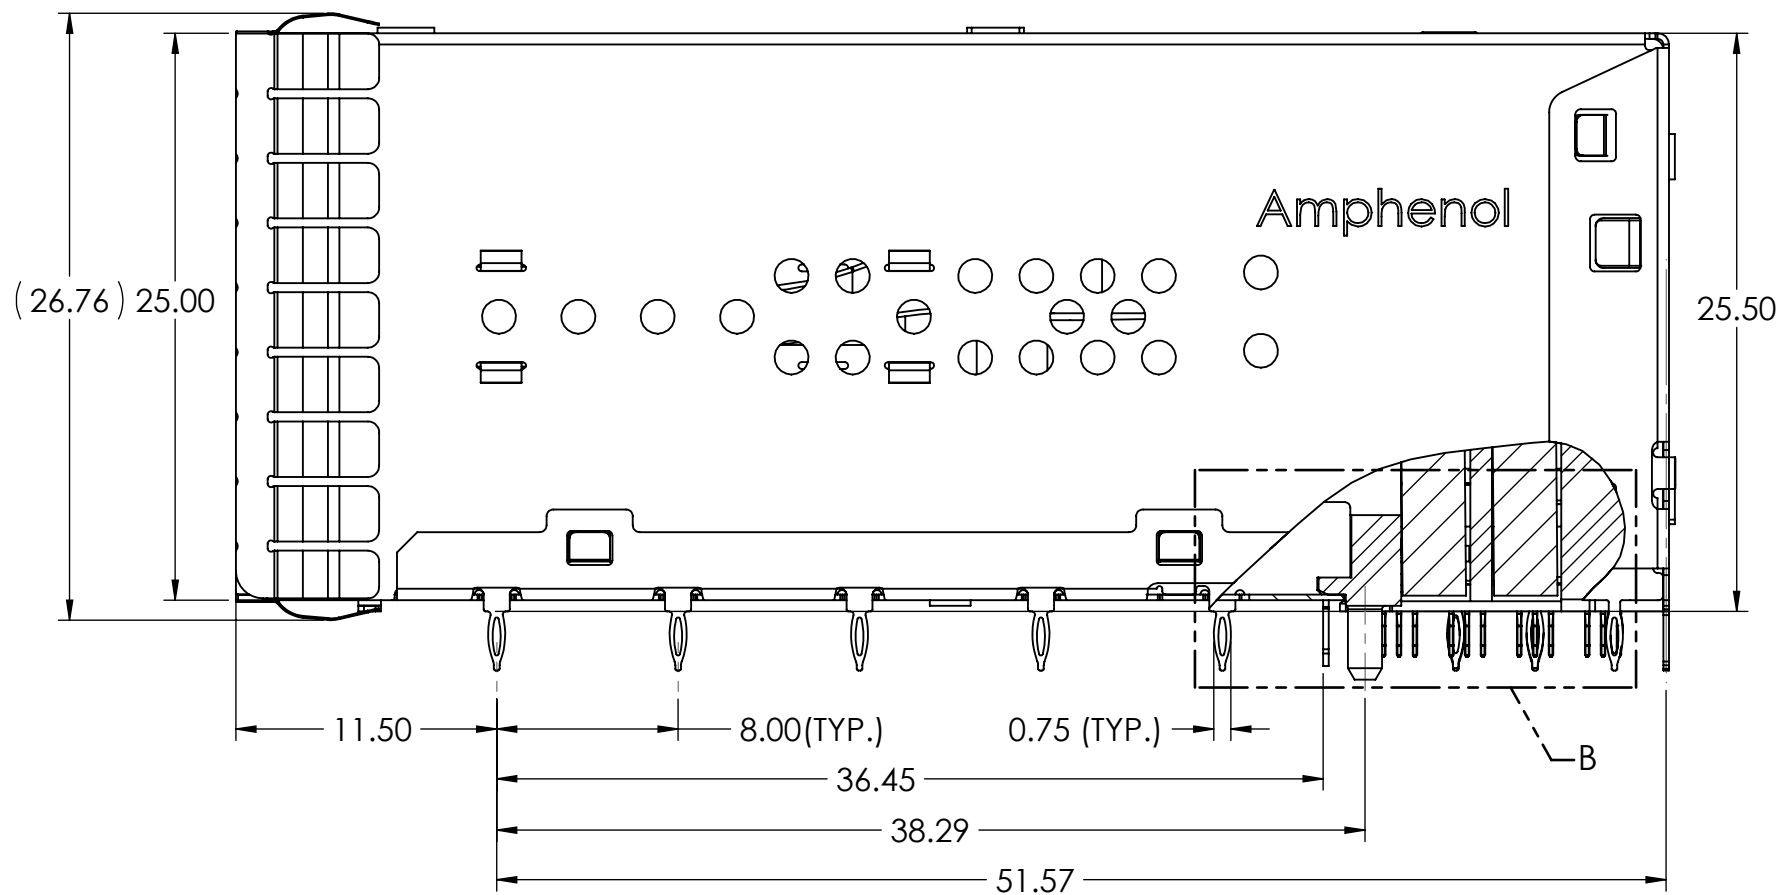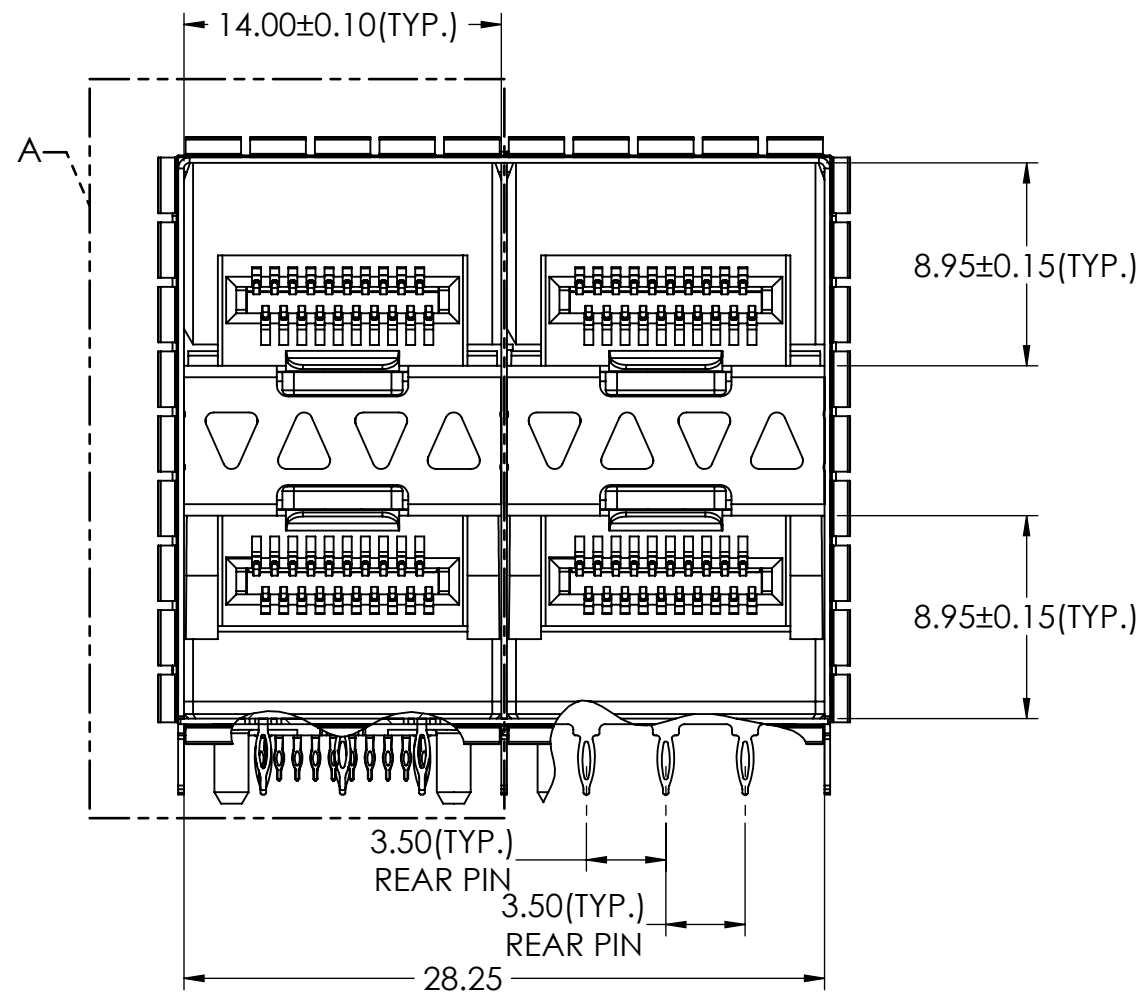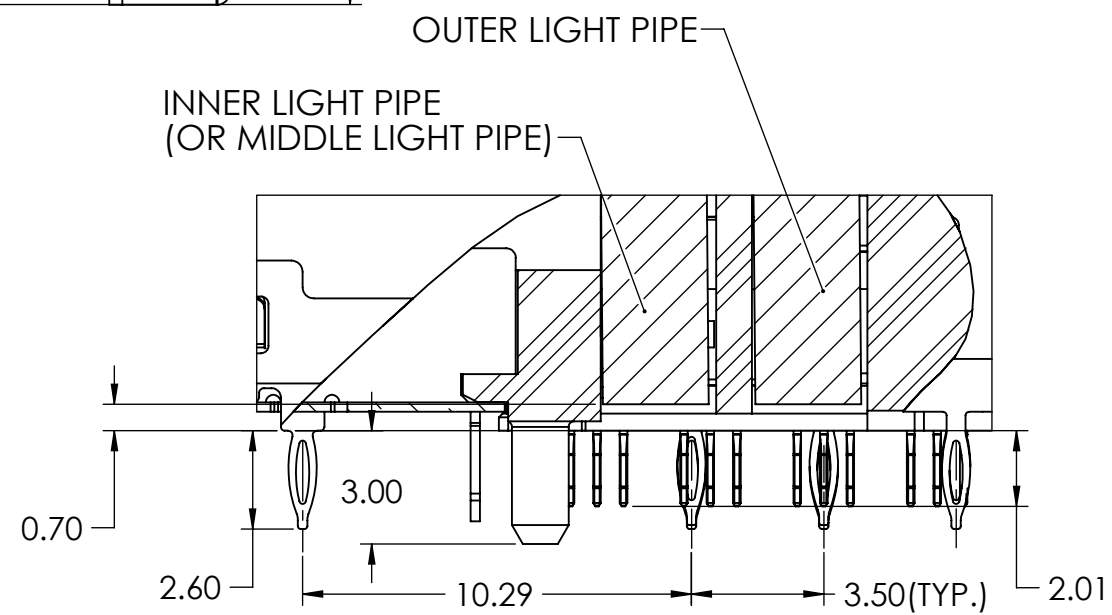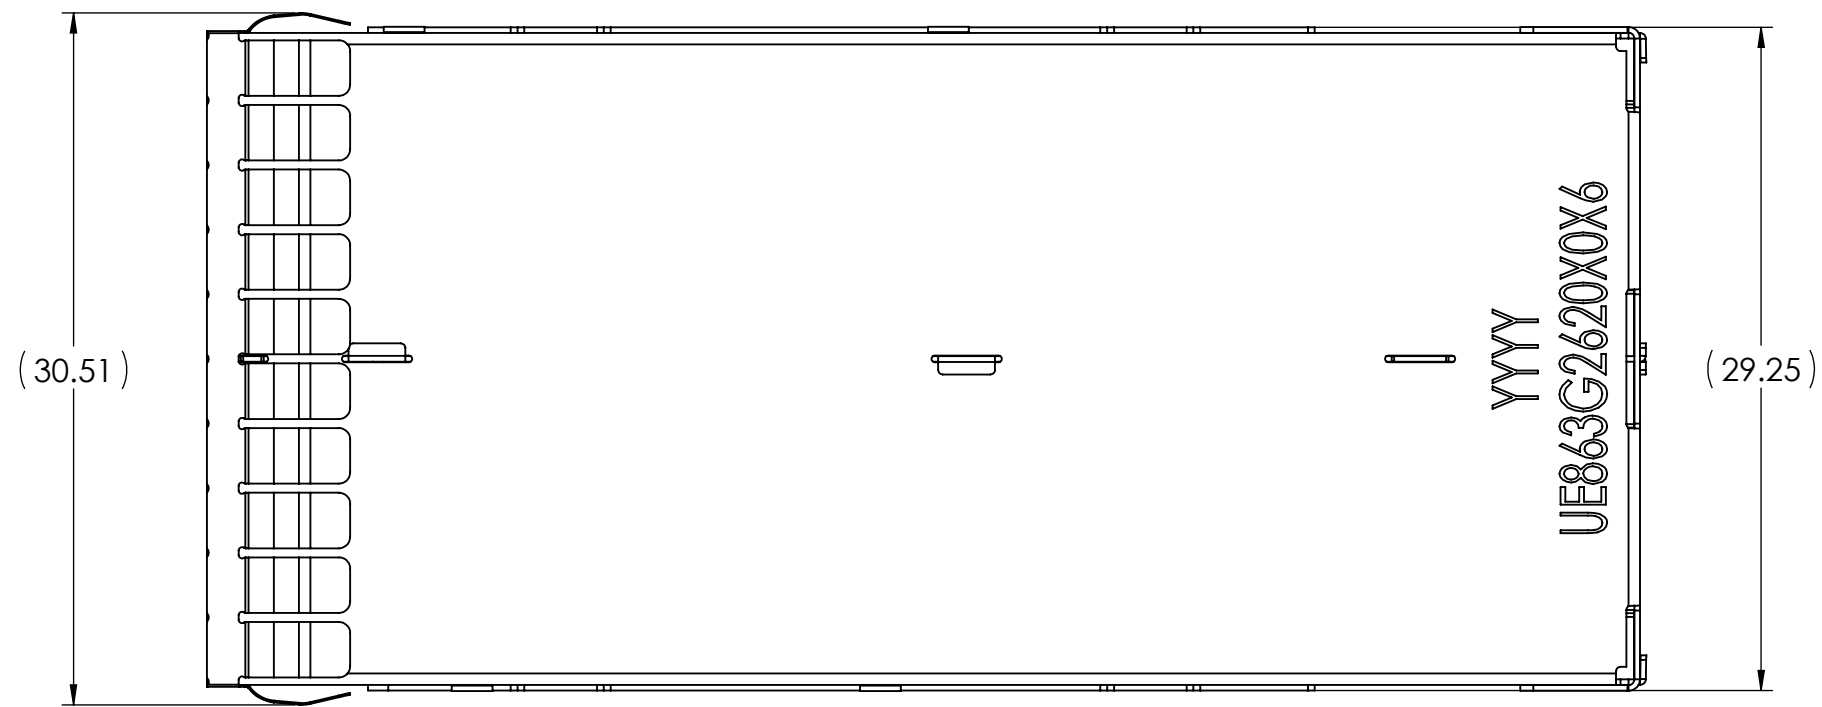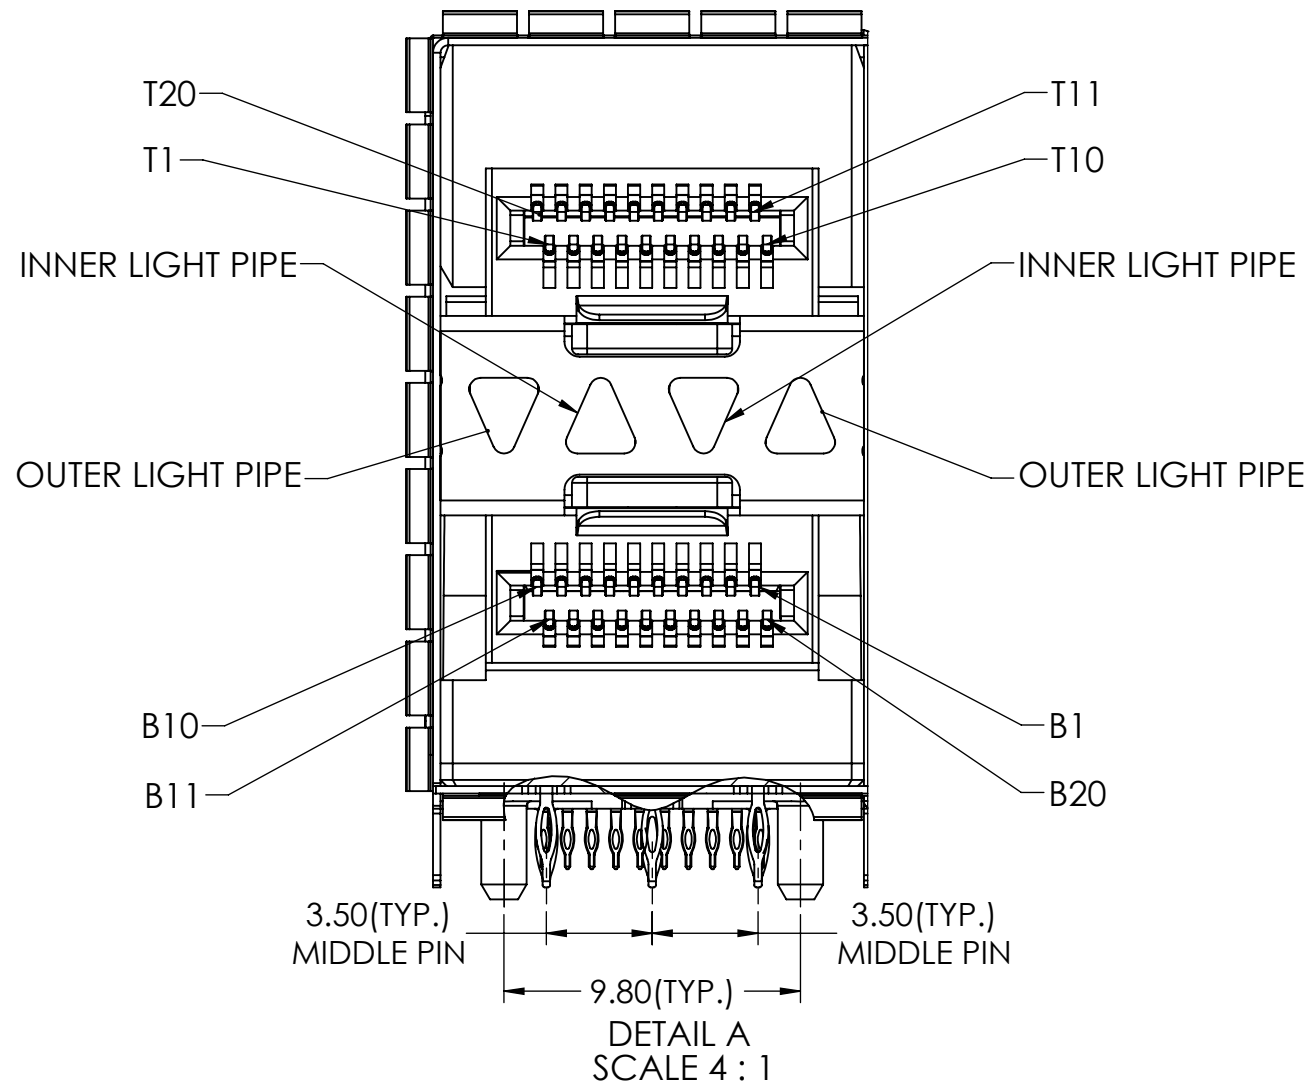


UNLESS SPECIFIED OTHERWISE		DRAWN		P. OU		FEB10/14		Amphenol High Speed Interconnects A Division of Amphenol Corp. www.amphenolcanada.com							
DIMENSIONS ARE IN MILLIMETERS		CHECKED		J. SI		NOV03/15									
REFERENCE IN PARENTHESES		M.E. APP'D						2X2 SFP ULTRAPORT WITH LIGHT PIPE OPTIONS AND EMI SPRING FINGER							
GENERAL TOLERANCES		Q.A. APP'D													
1 DECIMAL PLACE		±0.25		DWG APP'D		J. SI		NOV03/15		DWG. NO. P-UE86-3G2620-X0X61					
2 DECIMAL PLACE		±0.15		MATERIAL AND FINISH		SEE NOTES									
3 DECIMAL PLACE		±0.10		REF.		ECN Exxxxx		REV E							
ANGULAR DEGREES		±1°		THIRD ANGLE PROJECTION									DO NOT SCALE DRAWING		
ENG. REL. NO.								CODE ID NO. 03554		DWG SIZE: C		SCALE: 3:1		SHEET 2 OF 4	


THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

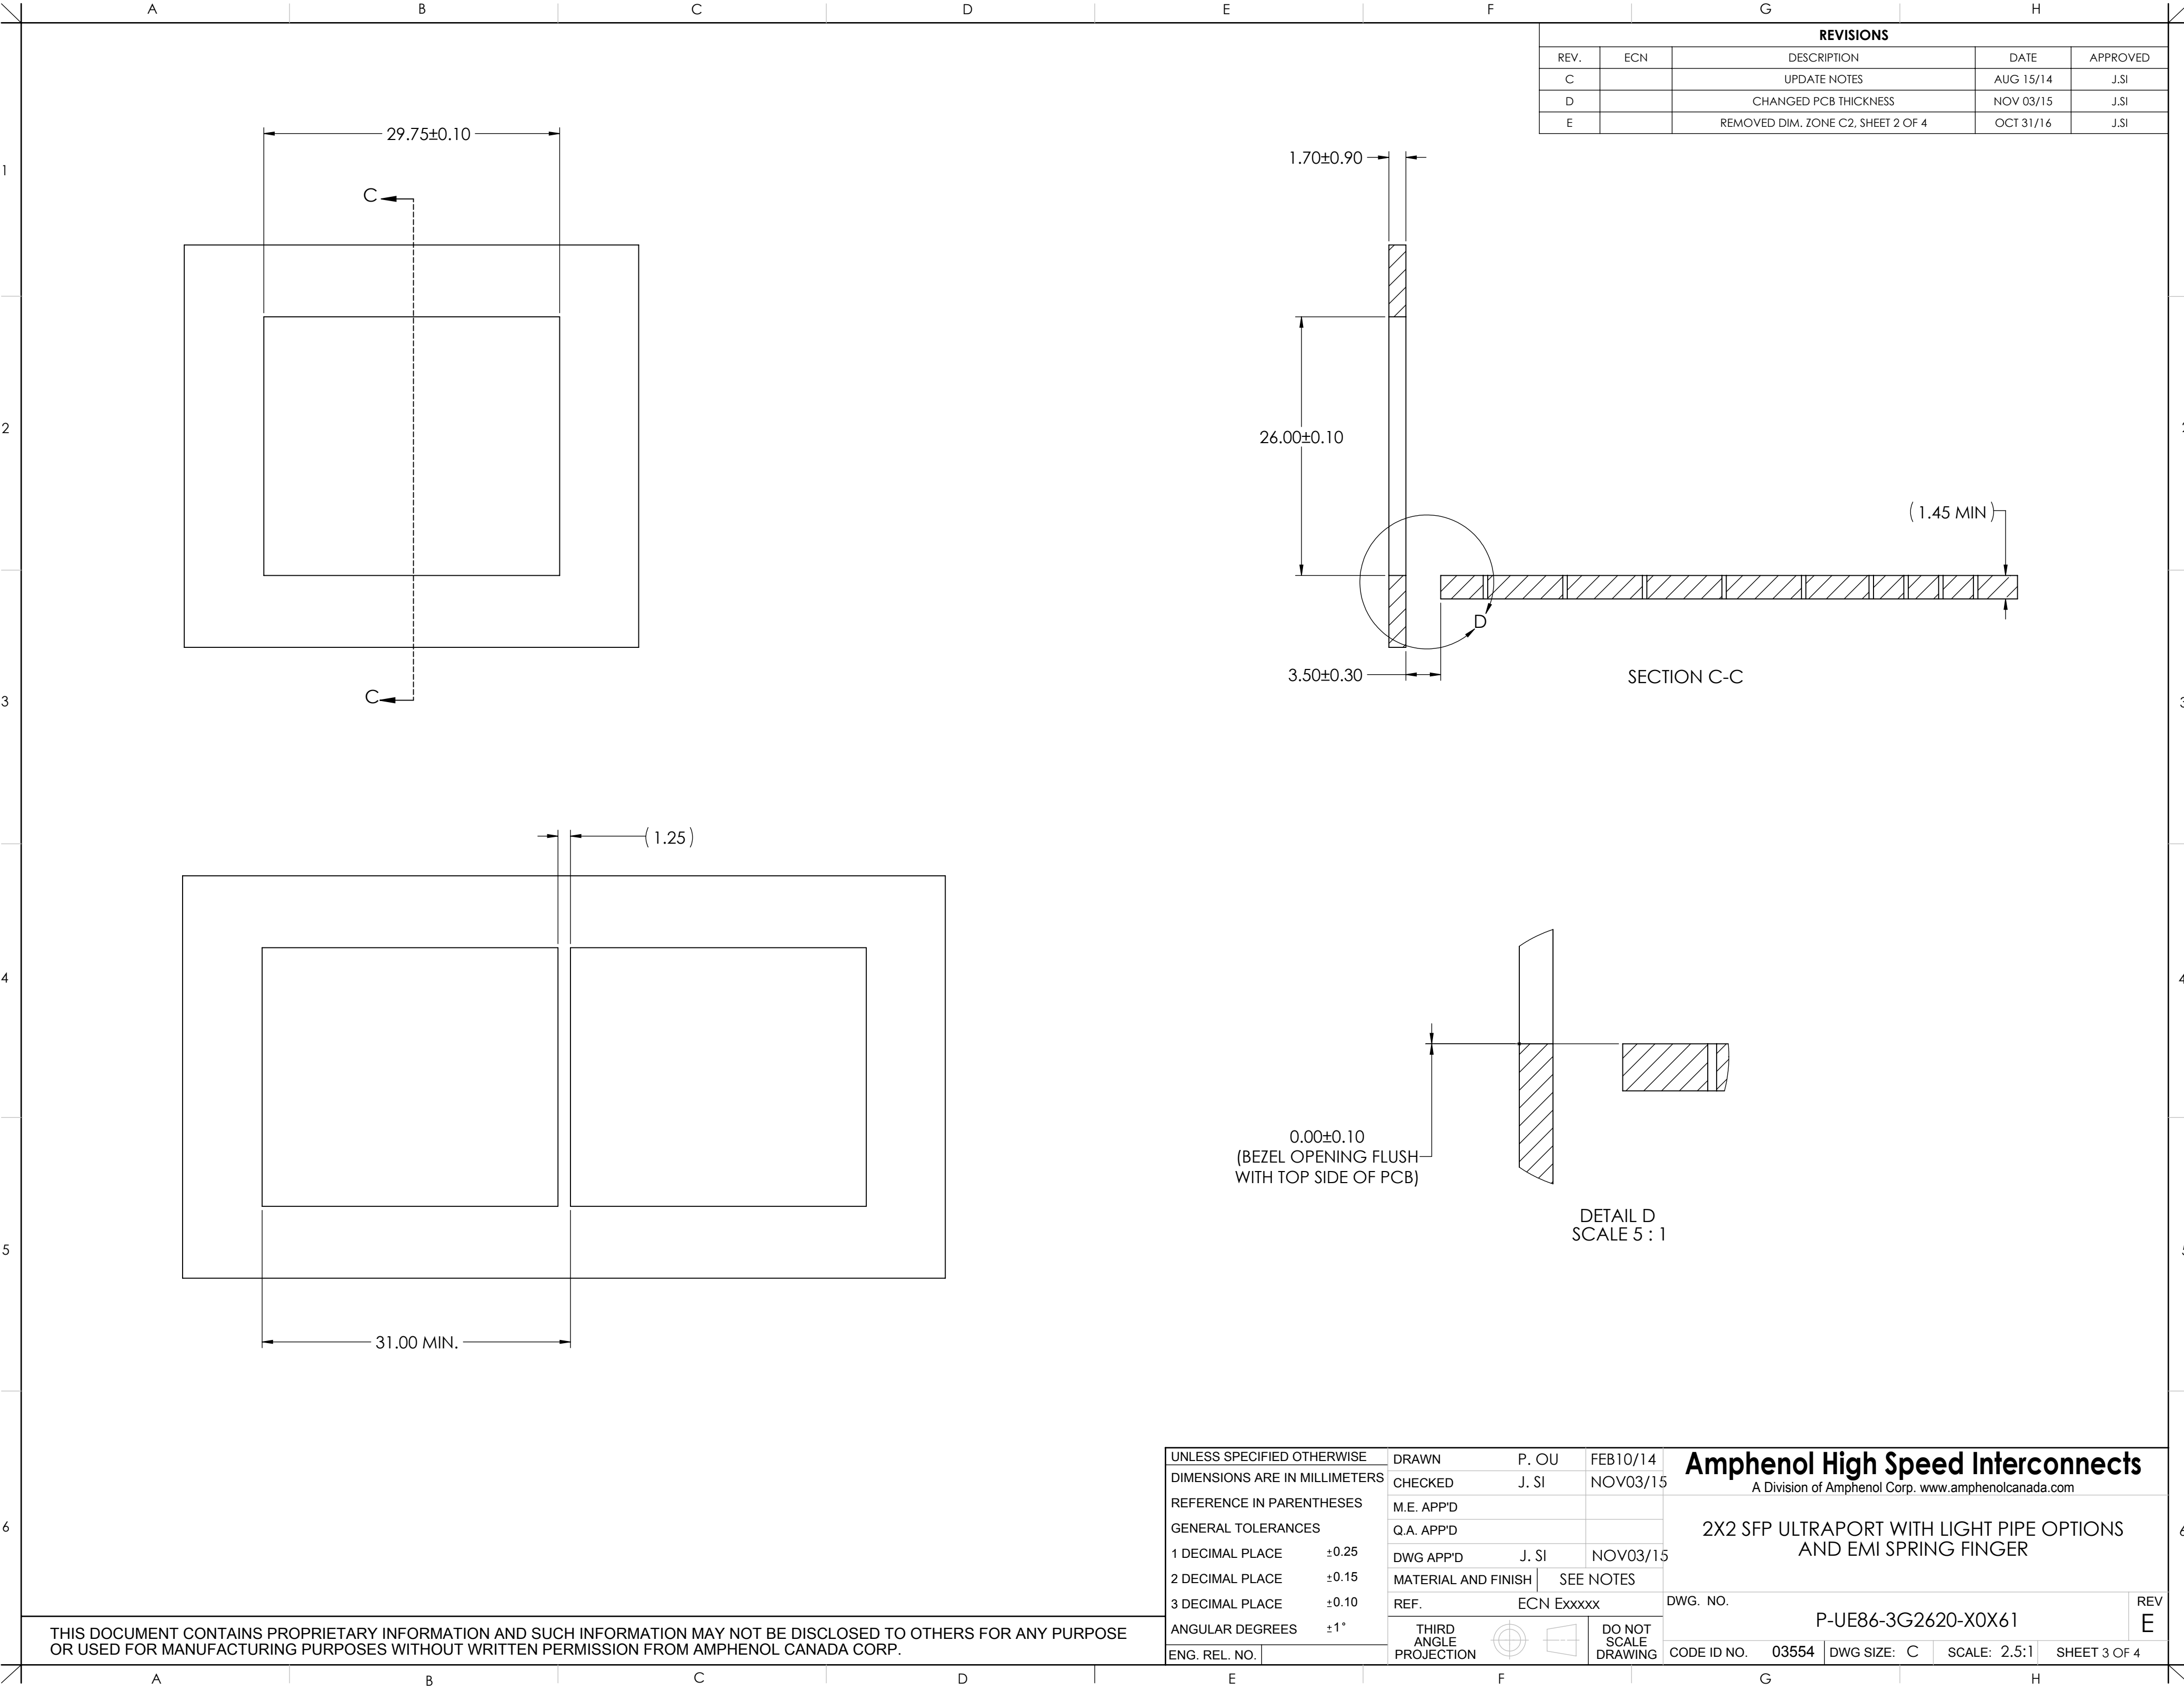


REVISIONS				
REV.	ECN	DESCRIPTION	DATE	APPROVED
C		UPDATE NOTES	AUG 15/14	J.SI
D		CHANGED PCB THICKNESS	NOV 03/15	J.SI
E		REMOVED DIM. ZONE C2, SHEET 2 OF 4	OCT 31/16	J.SI

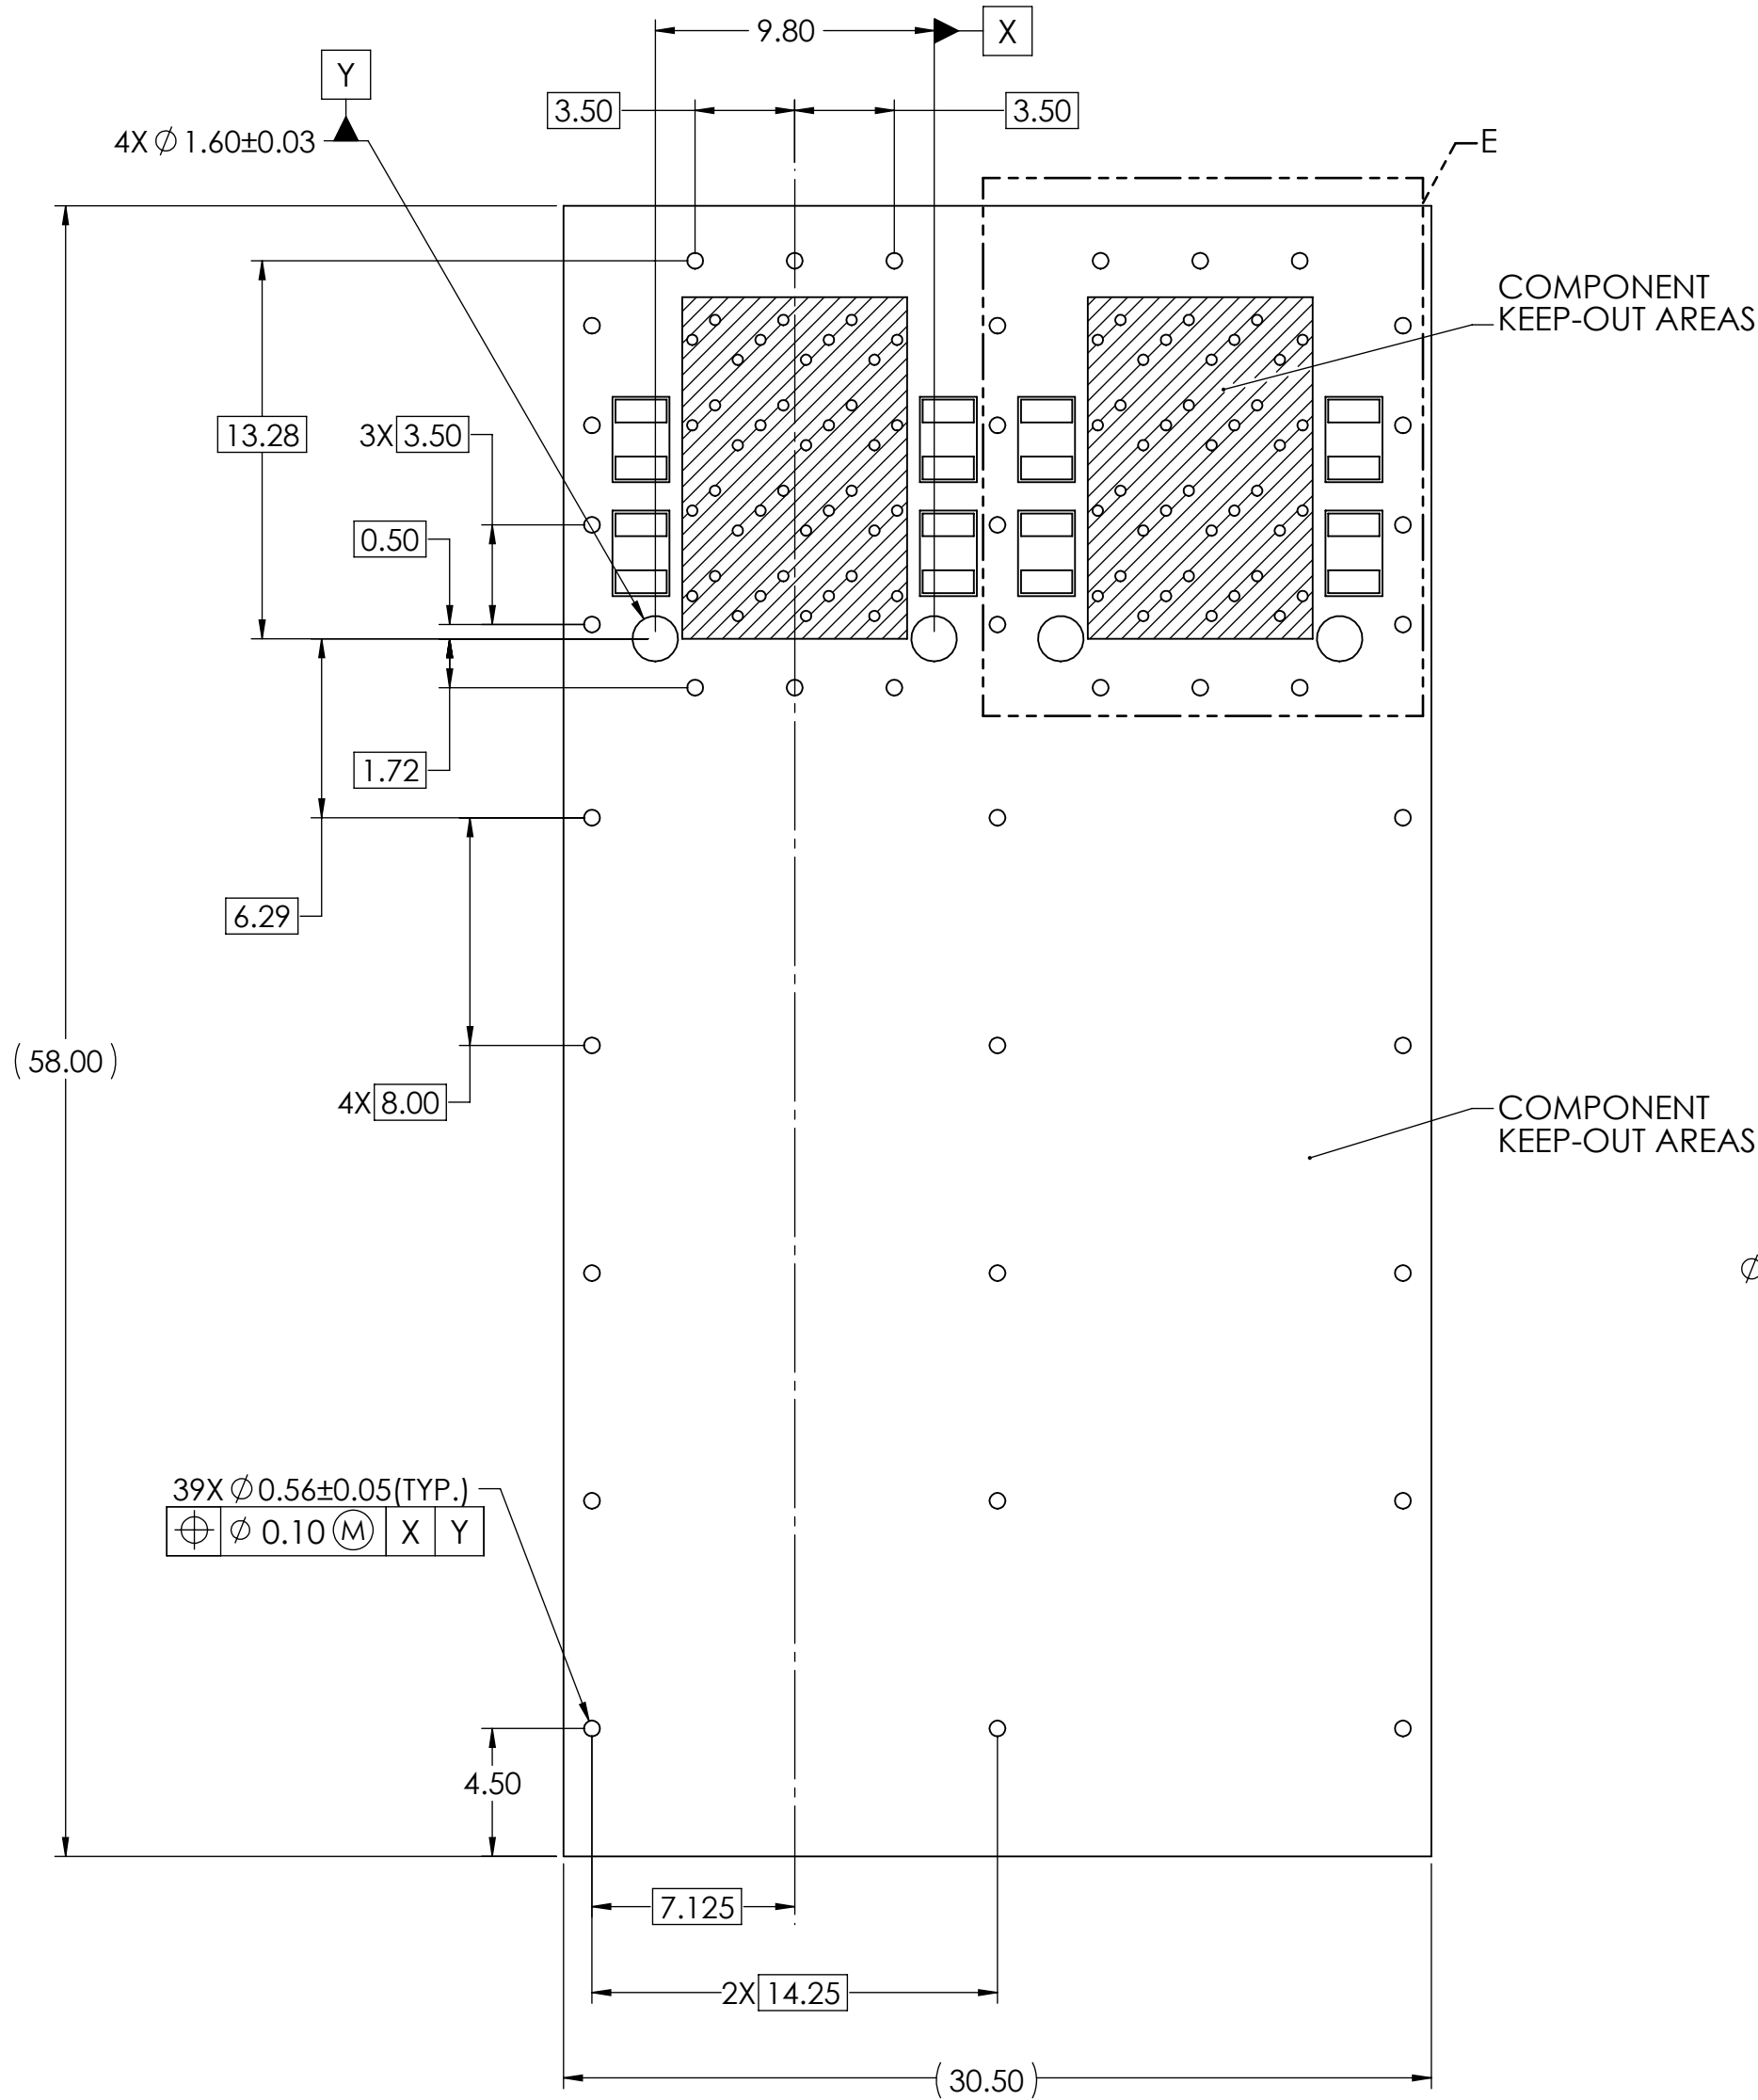

2X2 PCB LAYOUT

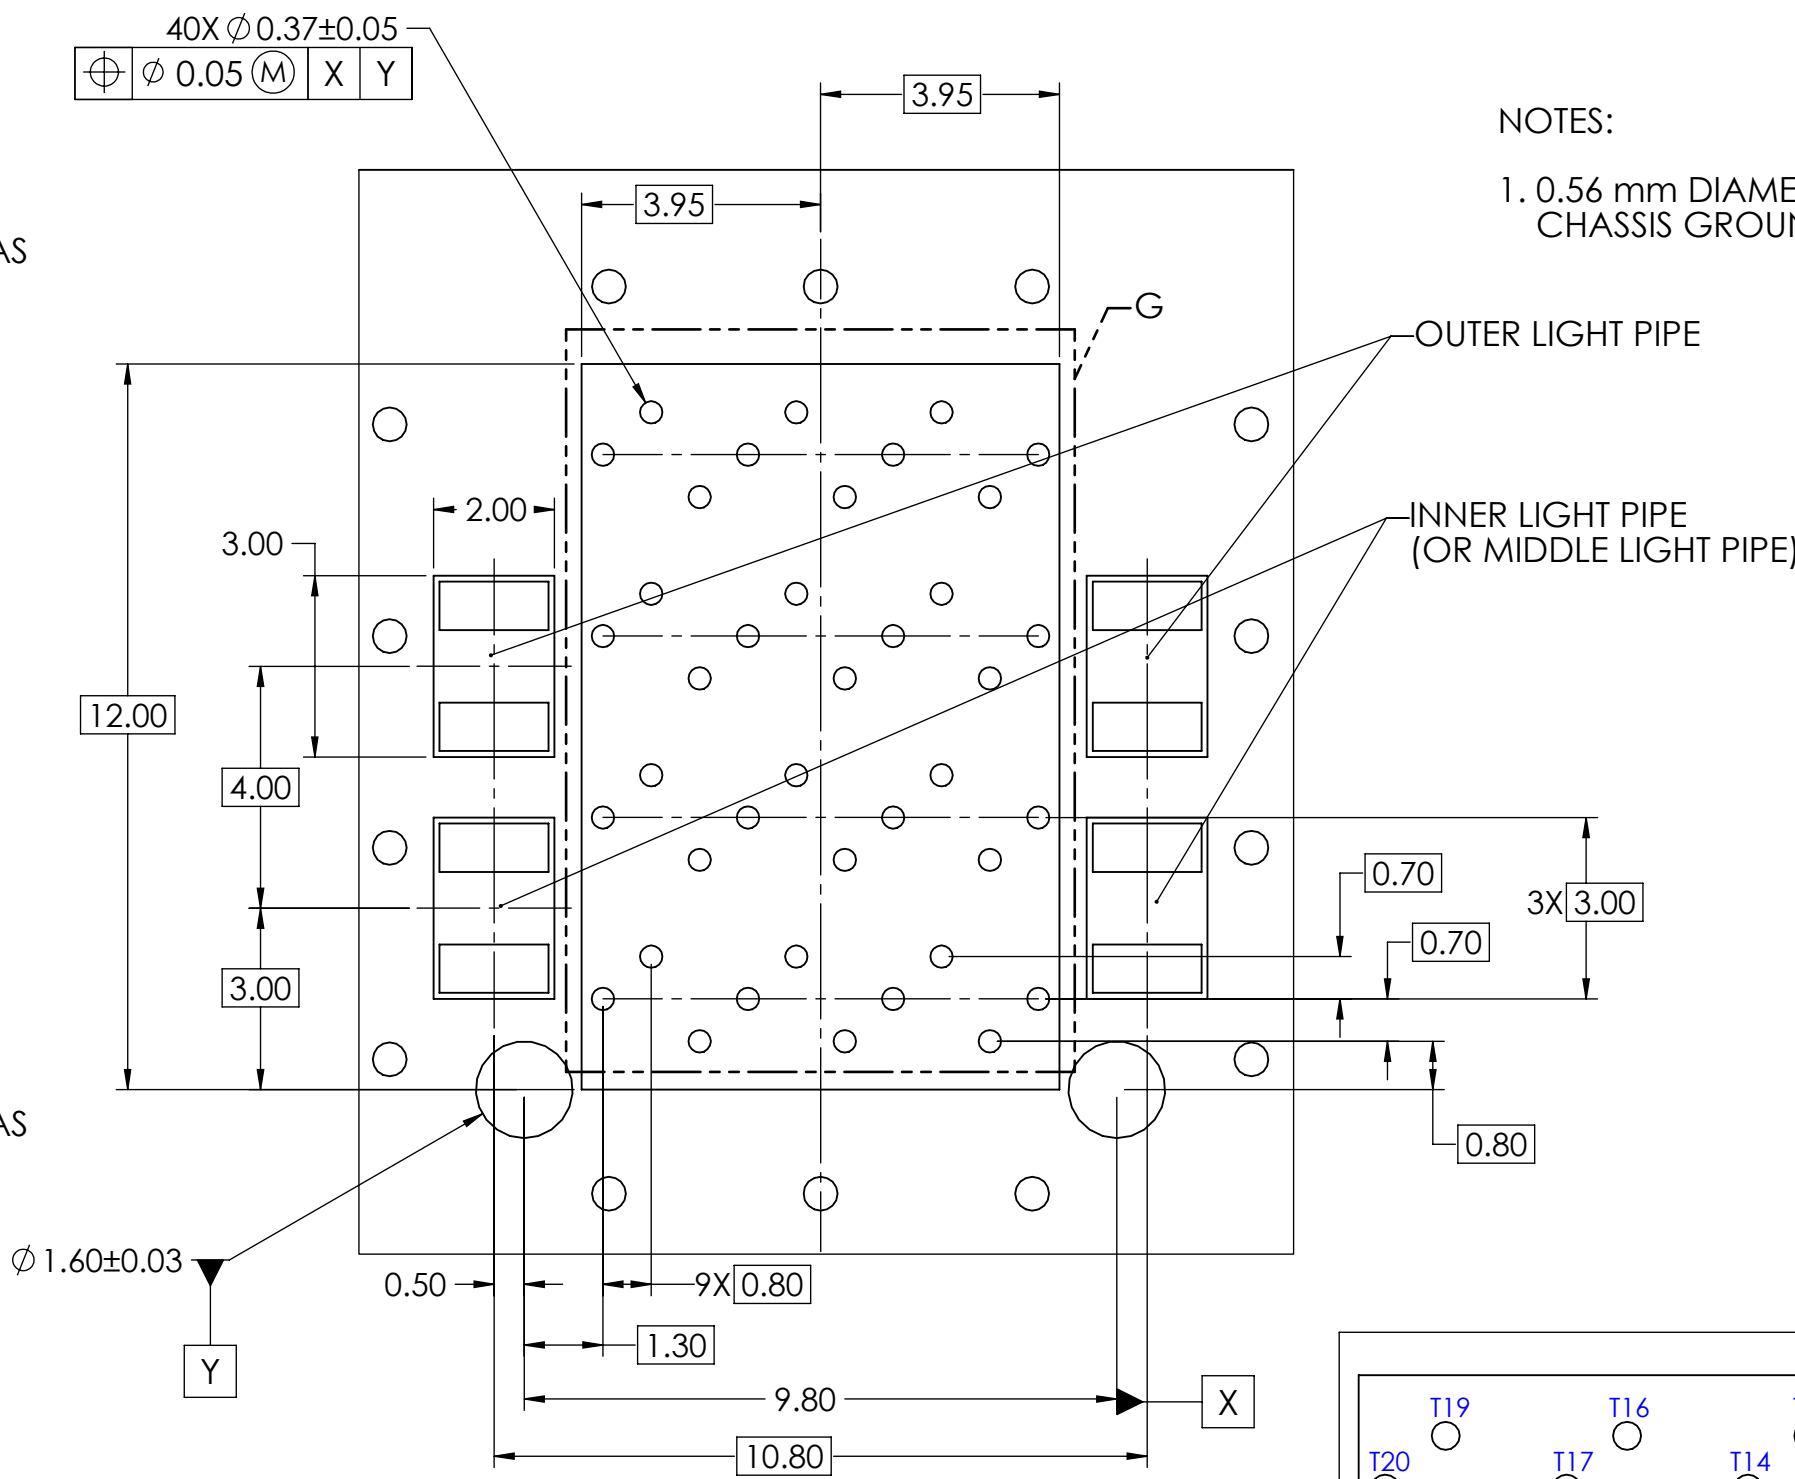

DETAIL E
SCALE 8 : 1

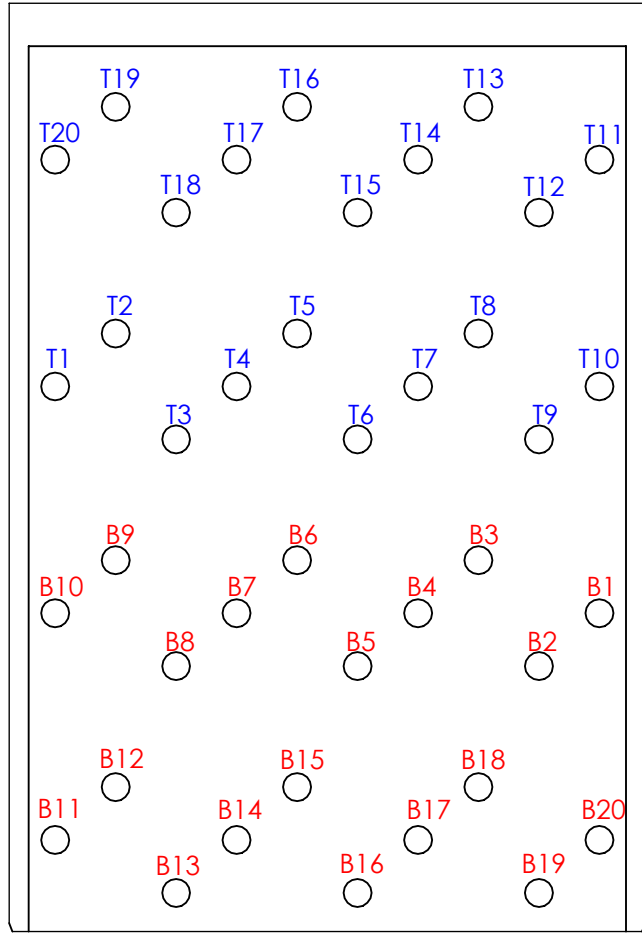

DETAIL G
SCALE 10 : 1

NOTES:
1. 0.56 mm DIAMETER HOLES ARE CHASSIS GROUND (39HOLES).

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS SPECIFIED OTHERWISE	DRAWN	P. OU	FEB10/14	Amphenol High Speed Interconnects A Division of Amphenol Corp. www.amphenolcanada.com			
DIMENSIONS ARE IN MILLIMETERS	CHECKED	J. SI	NOV03/15				
REFERENCE IN PARENTHESES	M.E. APP'D			2X2 SFP ULTRAPORT WITH LIGHT PIPE OPTIONS AND EMI SPRING FINGER			
GENERAL TOLERANCES	Q.A. APP'D						
1 DECIMAL PLACE	±0.25			DWG. NO.			
2 DECIMAL PLACE	±0.15						
3 DECIMAL PLACE	±0.10			P-UE86-3G2620-X0X61			
ANGULAR DEGREES	±1°						
ENG. REL. NO.	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	CODE ID NO.	03554	DWG SIZE:	C	SHEET 4 OF 4

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9