

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-

©

COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

A3

REVISED PER ECO-12-011771

26JUN12

KH




JO

- 1 MATERIAL :
HOUSING : THERMOPLASTIC(PA6T), UL94V-0, BLACK COLOR
CONTACT : BRASS.


- 2 FINISH :
CONTACT: $0.2\mu\text{m}$ [8μ] MIN. GOLD PLATED ON CONTACT AREA
 $2.54\mu\text{m}$ [100μ] MIN. MATTE TIN PLATED ON SOLDERTAILS,
 $1.27\mu\text{m}$ [50μ] MIN. NICKEL UNDERPLATED OVER ALL

- 3 FINISH :
CONTACT: $0.2\mu\text{m}$ [8μ] MIN. GOLD PLATED OVER ALL
 $1.27\mu\text{m}$ [50μ] MIN. NICKEL UNDERPLATED OVER ALL


- 4 WAVE SOLDER CAPABLE TO 265°C PER TE SPEC 109-202, CONDITION B.

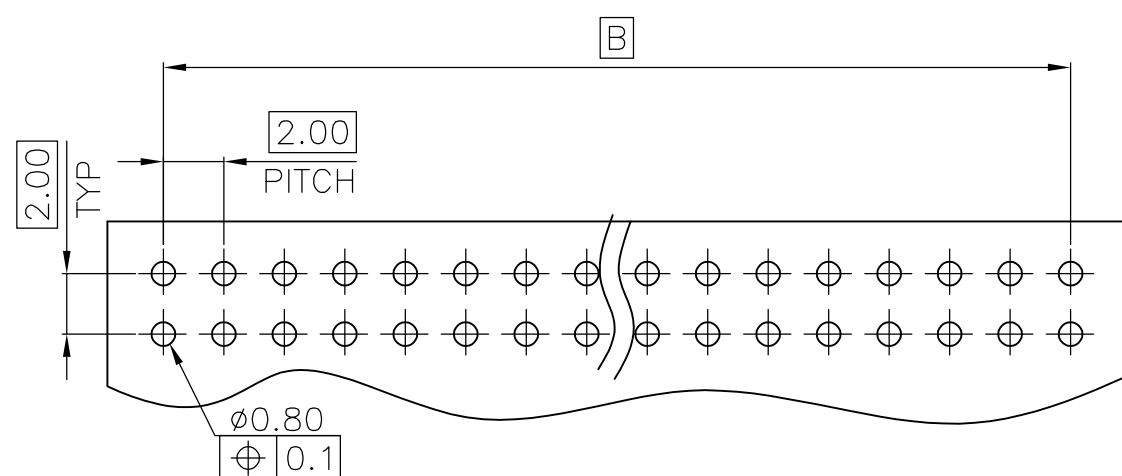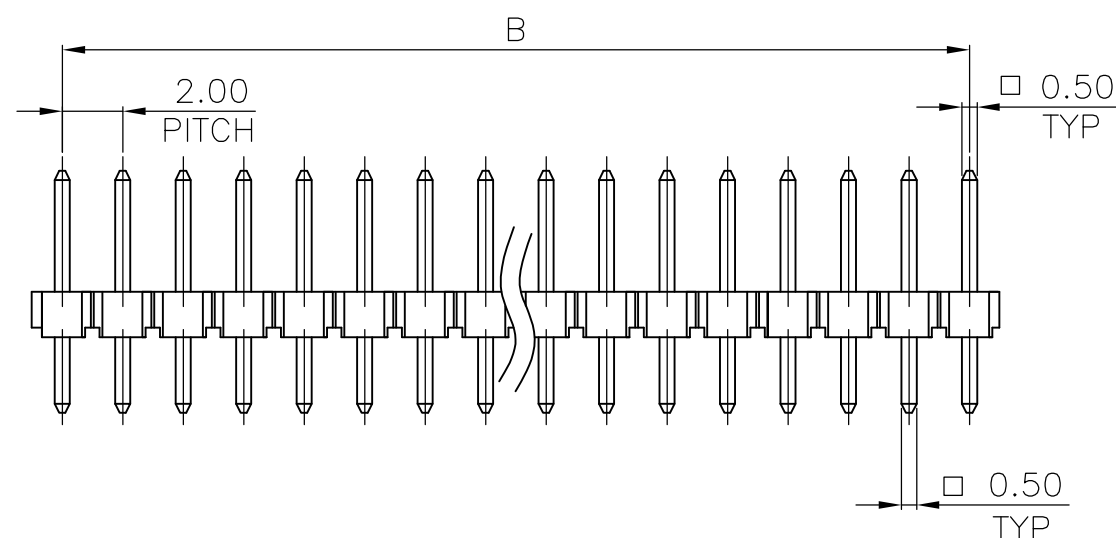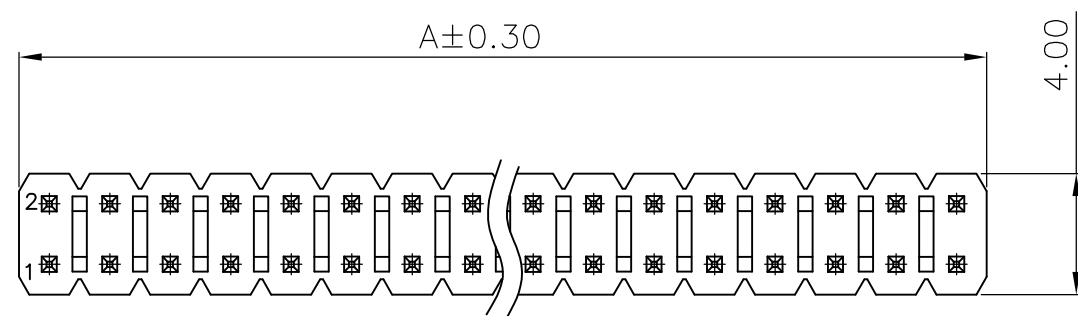

RECOMMENDED PCB LAYOUT
TOP VIEW, TOLERANCE:±0.05

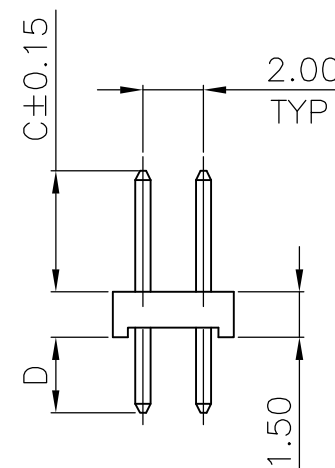

3	0.18	0.8	4.00	8.00	10.00	10	2041051-2
2	0.3	2.50	7.80	8.00	10.00	10	2041051-1
FINISH	WEIGHT(g)	D	C	B	A	POSITION NUMBER	PART NUMBER
DIMENSIONS							

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. CHIEN	24APR2008	 TE Connectivity							
		CHK S. CHIEN	24APR2008								
		APVD W. KODAMA	24APR2008	NAME							
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		AMPMODU 2.00MM PITCH POST HDR VERTICAL MOUNT TYPE —							
		0 PLC ± —		108—57197							
		1 PLC ± 0.30									
		2 PLC ± 0.20									
		3 PLC ± —									
		4 PLC ± —									
ANGLES ± 3°		APPLICATION SPEC		—							
501—57197											
MATERIAL		FINISH		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
SEE NOTE		SEE NOTE		A3		00779		C=2041051		—	
				WEIGHT		See Table					
				CUSTOMER DRAWING				SCALE		SHEET	
								—		1 OF 5	
										REV A3	

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-



COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR




DESCRIPTION

DATE


DWN

APVD

SEE SHEET 1

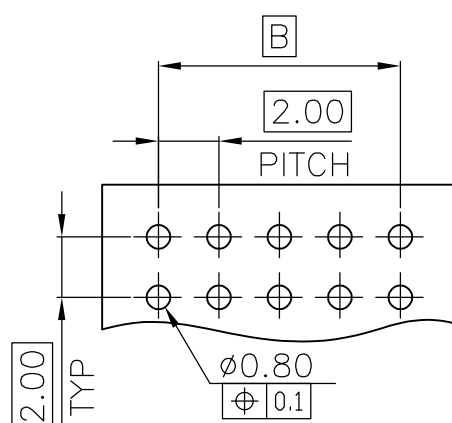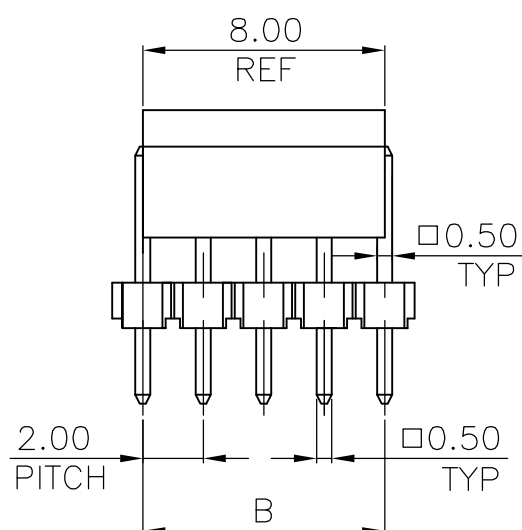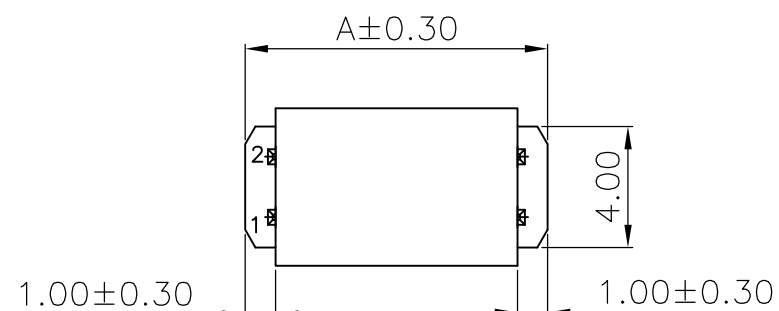

RECOMMENDED PCB LAYOUT
TOP VIEW, TOLERANCE:±0.05

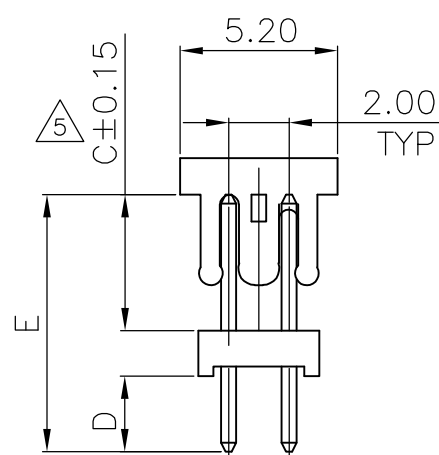

1 MATERIAL :
HOUSING : PA6T WITH 30% GF, UL 94V-0, BLACK COLOR
CAP: LCP WITH 30% GF, UL 94V-0, BLACK COLOR.
CONTACT : BRASS.



2 FINISH :
CONTACT: 0.2μm [8μ"] MIN. GOLD PLATED ON CONTACT AREA
2.54μm [100μ"] MIN. MATTE TIN PLATED ON SOLDER TAILS,
1.27μm [50μ"] MIN. NICKEL UNDERPLATED OVER ALL



3 FINISH :
CONTACT: 0.2μm [8μ"] MIN. GOLD PLATED OVER ALL
1.27μm [50μ"] MIN. NICKEL UNDERPLATED OVER ALL


4 WAVE SOLDER CAPABLE TO 265°C PER TE SPEC 109-202, CONDITION B.



5 DIMENSION IS FROM TOP OF HOUSING TO BOTTOM
LEDGE OF CAP

	0.50	11.04	2.50	7.04	8.00	10.00	10	1-2041051-4
	0.47	10.16	2.50	6.16	8.00	10.00	10	1-2041051-3
	0.40	8.50	2.50	4.50	8.00	10.00	10	1-2041051-2
	0.32	6.30	0.8	4.00	8.00	10.00	10	2041051-4
	0.48	11.80	2.50	7.80	8.00	10.00	10	2041051-3
FINISH	WEIGHT(g)	E	D	C	B	A	POSITION NUMBER	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL

SEE NOTE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0.30
2 PLC ± 0.20
3 PLC ± -
4 PLC ± -
ANGLES ± 3°

FINISH

SEE NOTE

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

See Table

CUSTOMER DRAWING



TE Connectivity

NAME

AMPMODU 2.00MM PITCH POST HDR
VERTICAL MOUNT TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779


C-2041051

SCALE

SHEET

2 OF 5

REV A3

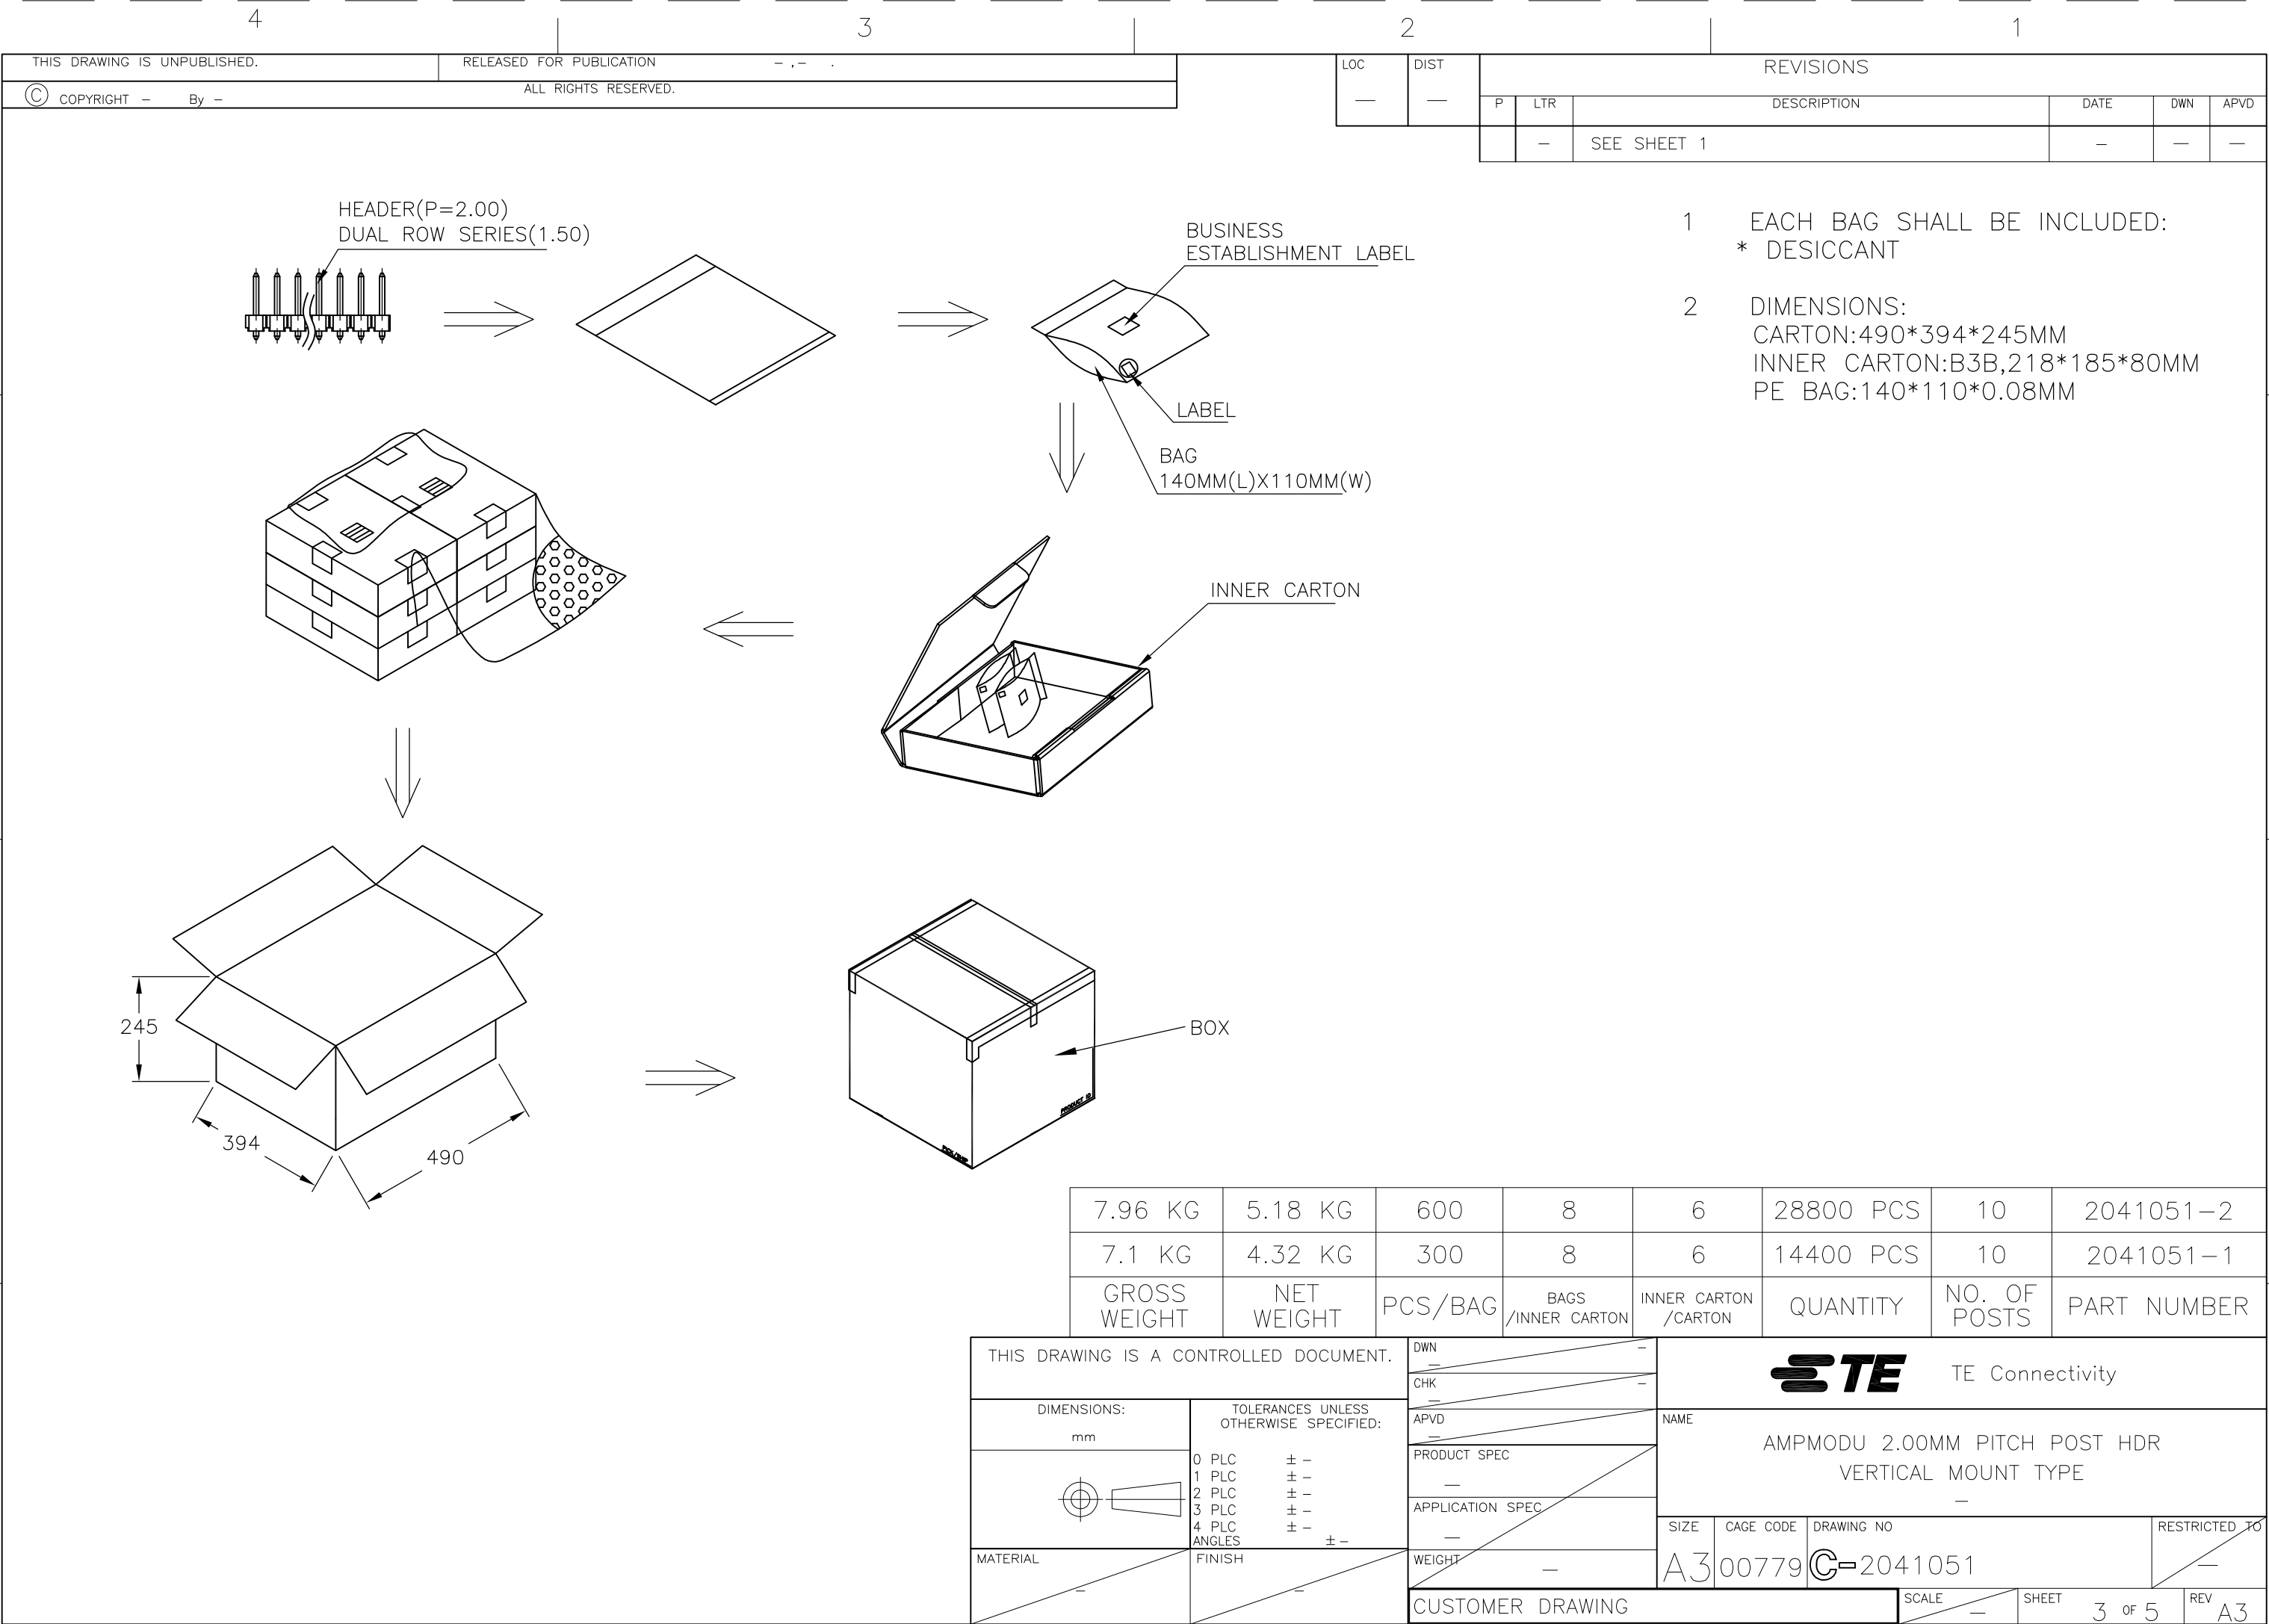

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION



-,-

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC —	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

- MATERIAL :
COVER TAPE : PT+ABS, COLOR: TRANSPARENT
CARRIER TAPE : PS
REEL : PS
SHIPPING BOX: CORRUGATED FIBER
- PEELING RESISTANCE : 10gf~130gf (for 12mm~56mm)
- PEELING SPEED : 300mm/MINUTES

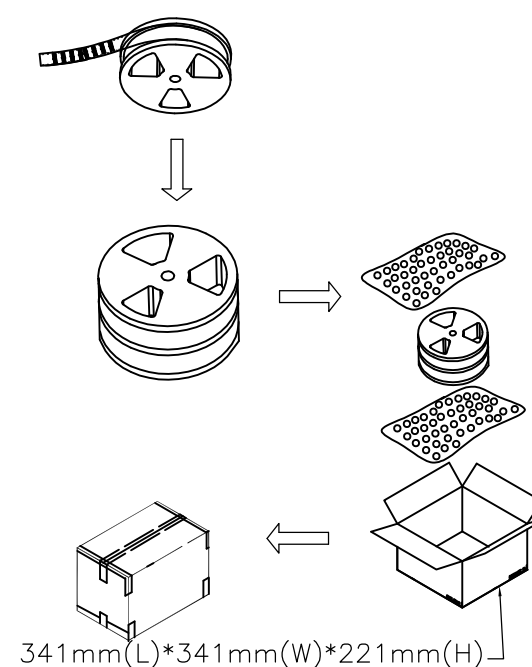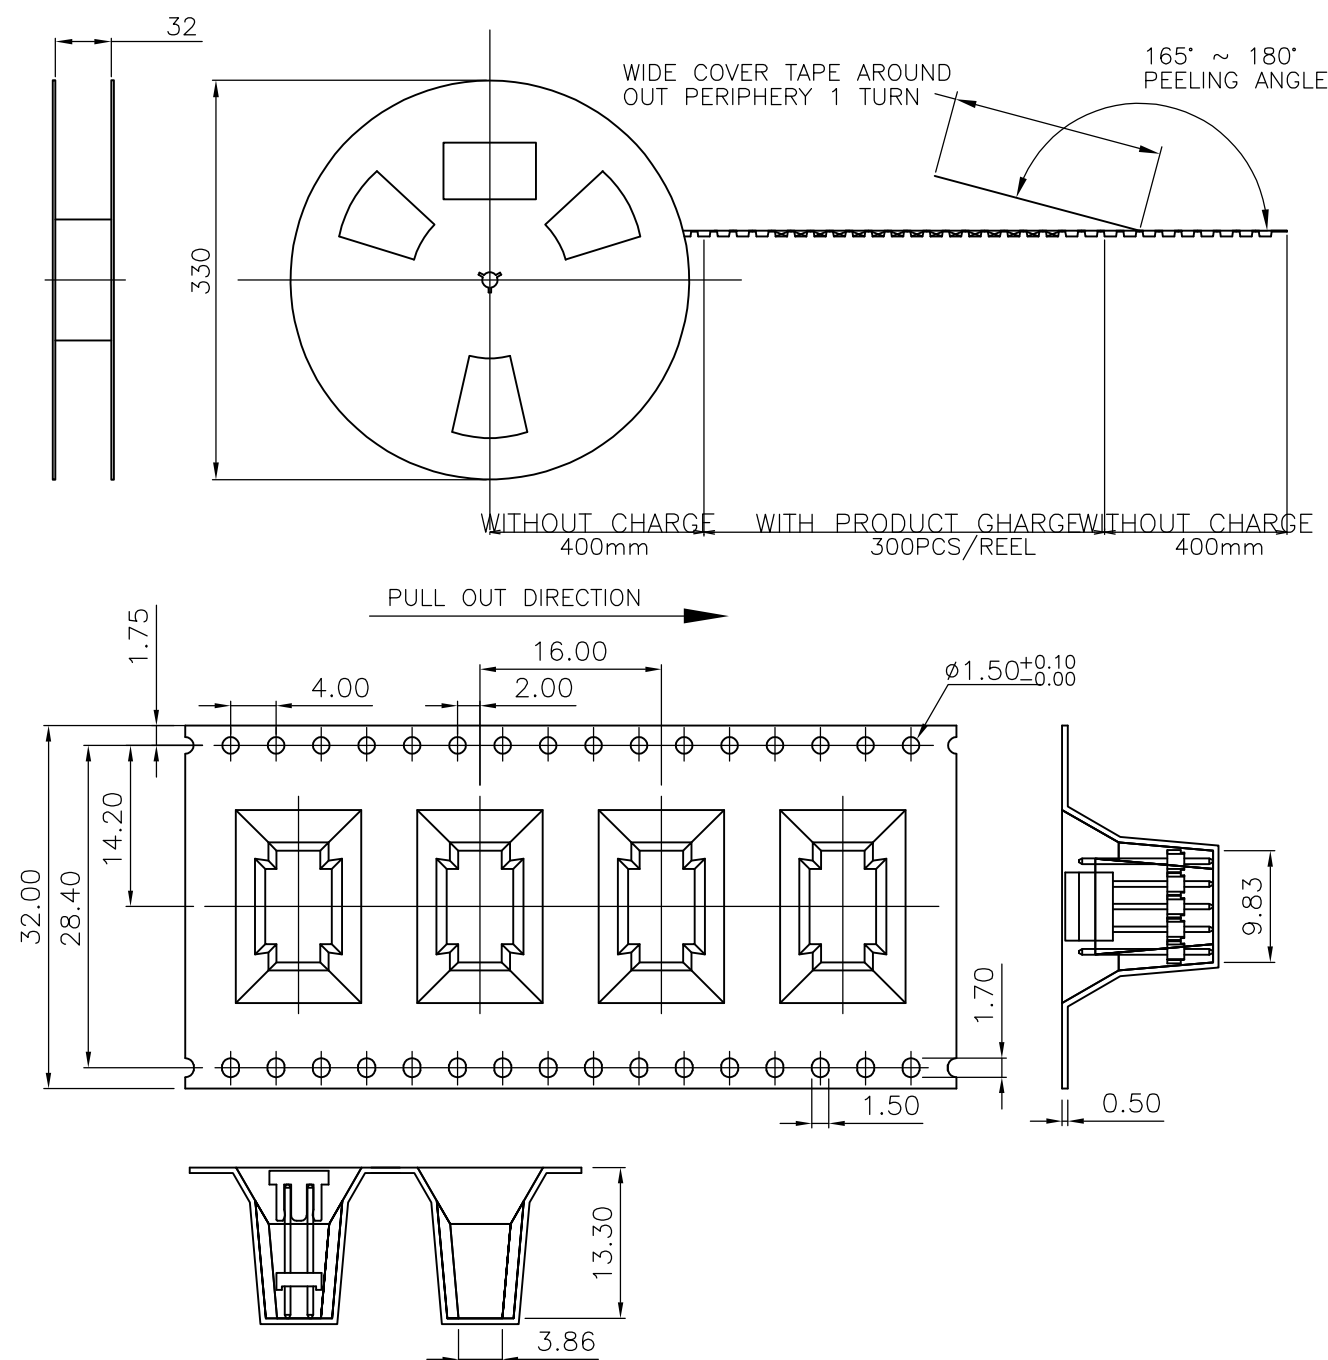


3.02 KG	0.50 KG	1250	250	10	1-2041051-4
3.02 KG	0.47 KG	1250	250	10	1-2041051-3
3.02 KG	0.60 KG	1250	250	10	2041051-3
GROSS WEIGHT	NET WEIGHT	PCS/CARTON	PCS/REEL	NO. OF POSTS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	-	 TE Connectivity		
		CHK	-			
		APVD	-	NAME		
		PRODUCT SPEC	-	AMPMODU 2.00MM PITCH POST HDR VERTICAL MOUNT TYPE		
		APPLICATION SPEC	-			
		WEIGHT	-	SIZE	CAGE CODE	DRAWING NO
				A3	00779	C-2041051
		CUSTOMER DRAWING		SCALE	SHEET	REV
				-	4 OF 5	A3

DIMENSIONS:

mm



TOLERANCES UNLESS OTHERWISE SPECIFIED:



0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL

FINISH

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—		—	SEE SHEET 1	—	—	—

- 1
- MATERIAL :
COVER TAPE : PT+ABS, COLOR: TRANSPARENT
CARRIER TAPE : PS
REEL : PS
SHIPPING BOX: CORRUGATED FIBER
- 2
- PEELING RESISTANCE : 10gf~130gf (for 12mm~56mm)
- 3
- PEELING SPEED : 300mm/MINUTES

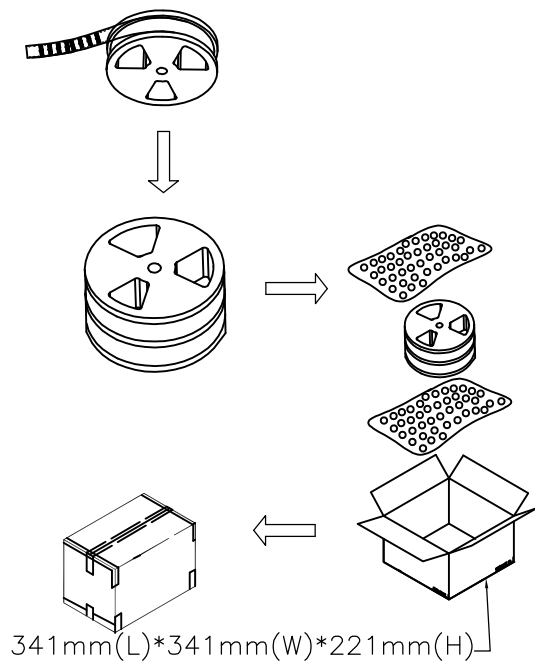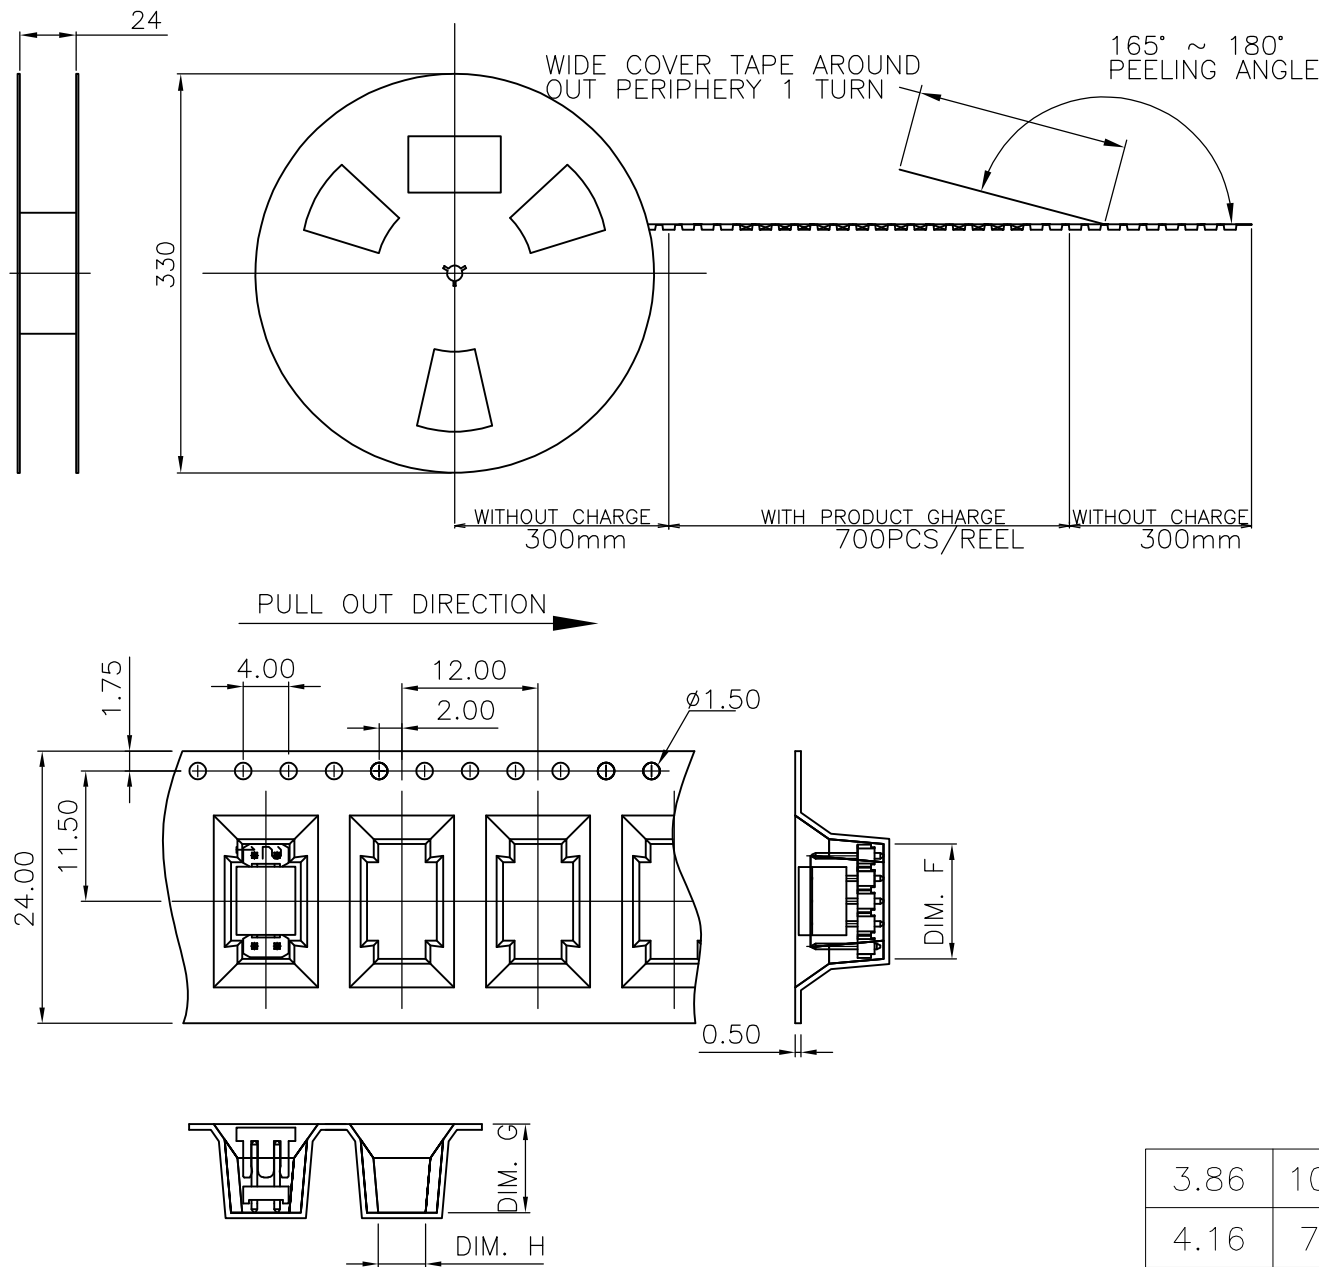

3.86	10.10	9.82	3.95 KG	1.05 KG	2400	400	10	1-2041051-2
4.16	7.80	10.12	4.34 KG	1.44 KG	4200	700	10	2041051-4
DIM.H	DIM.G	DIM.F	GROSS WEIGHT	NET WEIGHT	PCS/CARTON	PCS/REEL	NO. OF POSTS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH

DWN
CHK
APVD
PRODUCT SPEC
APPLICATION SPEC
WEIGHT

STE

TE Connectivity

NAME
AMPMODU 2.00MM PITCH POST HDR
VERTICAL MOUNT TYPE

SIZE
A3

CAGE CODE
00779

DRAWING NO
C-2041051

RESTRICTED TO

CUSTOMER DRAWING

SCALE
—

SHEET
5 of 5

REV
A3

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9