

MAXIM

Fast, Low-Voltage, 2.5Ω, SPST, CMOS Analog Switches

General Description

The MAX4645/MAX4646 single-pole, single-throw (SPST) analog switches feature a 2.5Ω typical on-resistance (R_{ON}) from a +5V supply. R_{ON} is flat (0.4Ω max) over the specified signal range. Each switch can handle Rail-to-Rail® analog signals. Off-leakage current is 0.25nA max at +25°C. These analog switches are ideal in low-distortion applications and are the preferred solution over mechanical relays in automated test equipment or applications where current switching is required. They have low power requirements, require less board space, and are more reliable than mechanical relays.

These switches operate from a +1.8V to +5V single supply, making them ideal for use in battery-powered applications. The MAX4645/MAX4646 have fast switching speeds of 12ns turn-on time (t_{ON}) and 8ns turn-off time (t_{OFF}).

The MAX4645 is a normally open (NO) switch, and the MAX4646 is a normally closed (NC) switch. Both are available in 5-pin SOT23, 6-pin SOT23, and 8-pin μMAX packages.

Applications

- Battery-Powered Systems
- Audio and Video Signal Routing
- Low-Voltage Data-Acquisition Systems
- Sample-and-Hold Circuits
- Communications Circuits
- Relay Replacement

Features

- ◆ +1.8V to +5V Single-Supply Operation
- ◆ Guaranteed R_{ON}
2.5Ω max (5V supply)
3.5Ω max (3V supply)
- ◆ 1.8V Operation
 R_{ON} 30Ω typ Over Temperature
 t_{ON} 40ns typ, t_{OFF} 20ns typ
- ◆ Low R_{ON} Flatness: 0.4Ω max
- ◆ Guaranteed Low Leakage Currents
±0.25nA at +25°C
- ◆ Rail-to-Rail Output Capability
- ◆ TTL/CMOS-Logic Compatible
- ◆ -75dB Off-Isolation at 1MHz
- ◆ Low Distortion: 0.014% typ

MAX4645/MAX4646




Ordering Information

PART	TEMP RANGE	PIN-PACKAGE	TOP MARK
MAX4645EUK-T	-40°C to +85°C	5 SOT23-5	ADOB
MAX4645EUT-T	-40°C to +85°C	6 SOT23-6	AAHL
MAX4645EUA	-40°C to +85°C	8 μMAX	—
MAX4646EUK-T	-40°C to +85°C	5 SOT23-5	ADOC
MAX4646EUT-T	-40°C to +85°C	6 SOT23-6	AAHM
MAX4646EUA	-40°C to +85°C	8 μMAX	—

Rail-to-Rail is a registered trademark of Nippon Motorola, Ltd.

Pin Configurations/Functional Diagrams/Truth Tables

TOP VIEW



NOTE: SOT23-5 PACKAGE HAS LETTERING NEAREST PIN 5.

INPUT	SWITCH STATE	
	MAX4645	MAX4646
0	OFF	ON
1	ON	OFF

SWITCHES SHOWN FOR LOGIC 0 INPUT.

Pin Configurations/Functional Diagrams/
Truth Tables continued at end of data sheet.

MAXIM

Maxim Integrated Products 1

For pricing, delivery, and ordering information, please contact Maxim/Dallas Direct! at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

Fast, Low-Voltage, 2.5Ω, SPST, CMOS Analog Switches

ABSOLUTE MAXIMUM RATINGS

V+, V _{IN} to GND	-0.3 to +6V
COM, NO, NC to GND (Note 1).....	-0.3V to (V+ + 0.3V)
Continuous Current (any terminal).....	±50mA
Peak Current COM, NO, NC (pulsed at 1ms 10% duty cycle).....	±100mA

Continuous Power Dissipation (T _A = +70°C)	
5-Pin SOT23 (derate 7.1mW/°C above +70°C).....	571mW
6-Pin SOT23 (derate 8.7mW/°C above +70°C).....	696mW
8-Pin µMAX (derate 4.1mW/°C above +70°C)	330mW
Operating Temperature Range	-40°C to +85°C
Storage Temperature Range	-65°C to +150°C
Lead Temperature (soldering, 10s)	+300°C

Note 1: Signals on NO, NC, or COM, exceeding V+ or GND are clamped by internal diodes. Limit forward current to maximum current rating.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS—Single +5V Supply

(V+ = 4.5V to 5.5V, V_{IH} = 2.4V, V_{IL} = 0.8V, T_A = T_{MIN} to T_{MAX}, unless otherwise specified.) (Notes 2, 3)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS	
ANALOG SWITCH							
Input Voltage Range	V _{COM} , V _{NO} , V _{NC}		0	V+		V	
COM to NO or NC On-Resistance	R _{ON}	I _{COM} = 10mA, V _{NO} or V _{NC} = 0 to V+, V+ = 4.5V	T _A = +25°C	1.5	2.5	Ω	
			T _A = T _{MIN} to T _{MAX}	3			
On-Resistance Flatness (Note 4)	R _{FLAT(ON)}	I _{COM} = 10mA, V _{NO} or V _{NC} = 0 to V+, V+ = 4.5V	T _A = +25°C	0.1	0.4	Ω	
			T _A = T _{MIN} to T _{MAX}	0.6			
Off-Leakage Current (NO or NC) (Notes 5, 6)	I _{NO(OFF)} , I _{NC(OFF)}	V _{COM} = 1V, 4.5V; V _{NO} or V _{NC} = 4.5V, 1V; V+ = 5.5V	T _A = +25°C	-0.25	0.01	0.25	nA
			T _A = T _{MIN} to T _{MAX}	-0.35		0.35	
COM Off-Leakage Current (Notes 5, 6)	I _{COM(OFF)}	V _{COM} = 1V, 4.5V; V _{NO} or V _{NC} = 4.5V, 1V; V+ = 5.5V	T _A = +25°C	-0.25	0.01	0.25	nA
			T _A = T _{MIN} to T _{MAX}	-0.35		0.35	
COM On-Leakage Current (Notes 5, 6)	I _{COM(ON)}	V+ = 5.5V; V _{COM} = 4.5V, 1V; V _{NO} or V _{NC} = 4.5V, 1V, or floating	T _A = +25°C	-0.25	0.01	0.25	nA
			T _A = T _{MIN} to T _{MAX}	-0.35		0.35	
LOGIC INPUT							
Input Logic High	V _{IH}		2.4			V	
Input Logic Low	V _{IL}			0.8		V	
Logic Input Current	I _{IN}	V _{IN} = 0.8V or 2.4V	-0.1	0.005	0.1	µA	
SWITCH DYNAMIC CHARACTERISTICS							
Turn-On Time (Note 5)	t _{ON}	V _{NO} , V _{NC} = 3V, R _L = 300Ω, C _L = 35pF, Figure 2	T _A = +25°C	12	15	ns	
			T _A = T _{MIN} to T _{MAX}	18			
Turn-Off Time (Note 5)	t _{OFF}	V _{NO} , V _{NC} = 3V, R _L = 300Ω, C _L = 35pF, Figure 2	T _A = +25°C	8	10	ns	
			T _A = T _{MIN} to T _{MAX}	12			

Fast, Low-Voltage, 2.5Ω, SPST, CMOS Analog Switches

ELECTRICAL CHARACTERISTICS—Single +5V Supply (continued)

($V_+ = 4.5V$ to $5.5V$, $V_{IH} = 2.4V$, $V_{IL} = 0.8V$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise specified.) (Notes 2, 3)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Charge Injection	Q	$V_{GEN} = 2V$, $C_L = 1.0nF$, $R_{GEN} = 0$, Figure 3	$T_A = +25^\circ C$		5		pC
NO or NC Capacitance	C_{OFF}	$V_{NO}, V_{NC} = GND$, $f = 1MHz$, Figure 5	$T_A = +25^\circ C$		17		pF
COM Off-Capacitance	C_{COM}	$V_{COM} = GND$, $f = 1MHz$, Figure 5	$T_A = +25^\circ C$		17		pF
COM On-Capacitance	C_{COM}	$V_{COM} = V_{NO}, V_{NC} = GND$ $f = 1MHz$, Figure 5	$T_A = +25^\circ C$		38		pF
Off-Isolation (Note 7)	V_{ISO}	$V_{NO} = V_{NC} = 1V_{RMS}$, $R_L = 50\Omega$, $C_L = 5pF$, $f = 10MHz$, Figure 4	$T_A = +25^\circ C$		-55		dB
		$V_{NO} = V_{NC} = 1V_{RMS}$, $R_L = 50\Omega$, $C_L = 5pF$, $f = 1MHz$, Figure 4	$T_A = +25^\circ C$		-75		dB
Total Harmonic Distortion	THD	$R_L = 600\Omega$, 5Vp-p, $f = 20Hz$ to $20kHz$	$T_A = +25^\circ C$		0.014		%
POWER SUPPLY							
Positive Supply Current	I+	$V_+ = 5.5V$, $V_{IN} = 0$ or V_+ , all channels on or off	$T_A = +25^\circ C$		0.0001		μA
			$T_A = T_{MIN}$ to T_{MAX}			1.0	

ELECTRICAL CHARACTERISTICS—Single +3V Supply

($V_+ = 2.7V$ to $3.3V$, $V_{IH} = 2.0V$, $V_{IL} = 0.4V$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise specified.) (Notes 2, 3)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
ANALOG SWITCH							
Input Voltage Range	V_{COM} , V_{NO} , V_{NC}			0		V_+	V
COM to NO or NC On-Resistance	R_{ON}	$I_{COM} = 10mA$, V_{NO} or $V_{NC} = 0$ to V_+ , $V_+ = 2.7V$	$T_A = +25^\circ C$		2.5	3.5	Ω
			$T_A = T_{MIN}$ to T_{MAX}			4.5	
On-Resistance Flatness (Note 4)	$R_{FLAT(ON)}$	$I_{COM} = 10mA$, V_{NO} or $V_{NC} = 0$ to V_+ , $V_+ = 2.7V$	$T_A = +25^\circ C$		0.5	0.9	Ω
			$T_A = T_{MIN}$ to T_{MAX}			1	
Off-Leakage Current (NO or NC) (Notes 5, 6)	$I_{NO(OFF)}$, $I_{NC(OFF)}$	$V_{COM} = 1V, 3V$; V_{NO} or $V_{NC} = 3V, 1V$; $V_+ = 3.3V$	$T_A = +25^\circ C$	-0.25	0.01	0.25	nA
			$T_A = T_{MIN}$ to T_{MAX}	-0.35		0.35	
COM Off-Leakage Current (Notes 5, 6)	$I_{COM(OFF)}$	$V_{COM} = 1V, 3V$; V_{NO} or $V_{NC} = 3V, 1V$; $V_+ = 3.3V$	$T_A = +25^\circ C$	-0.25	0.01	0.25	nA
			$T_A = T_{MIN}$ to T_{MAX}	-0.35		0.35	
COM On-Leakage Current (Notes 5, 6)	$I_{COM(ON)}$	$V_+ = 3.3V$; $V_{COM} = 1V, 3V$; V_{NO} or $V_{NC} = 1V$, 3V or floating	$T_A = +25^\circ C$	-0.25	0.01	0.25	nA
			$T_A = T_{MIN}$ to T_{MAX}	-0.35		0.35	

Fast, Low-Voltage, 2.5Ω, SPST, CMOS Analog Switches

ELECTRICAL CHARACTERISTICS—Single +3V Supply (continued)

($V_+ = 2.7V$ to $3.3V$, $V_{IH} = 2.0V$, $V_{IL} = 0.4V$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise specified.) (Notes 2, 3)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
LOGIC INPUT						
Input Logic High	V_{IH}		2.0			V
Input Logic Low	V_{IL}			0.4		V
Logic Input Current	I_{IN}	$V_{INL} = 0.4V$ or $2.0V$	-1	0.005	1	μA
SWITCH DYNAMIC CHARACTERISTICS						
Turn-On Time (Note 5)	t_{ON}	$V_{NO}, V_{NC} = 2.0V$, $R_L = 300\Omega$, $C_L = 35pF$, Figure 2	$T_A = +25^\circ C$	12	15	ns
			$T_A = T_{MIN}$ to T_{MAX}		20	
Turn-Off Time (Note 5)	t_{OFF}	$V_{NO}, V_{NC} = 2.0V$, $R_L = 300\Omega$, $C_L = 35pF$, Figure 2	$T_A = +25^\circ C$	8	10	ns
			$T_A = T_{MIN}$ to T_{MAX}		13	
Charge Injection	Q	$V_{GEN} = 1.5V$, $C_L = 1.0nF$, $R_{GEN} = 0$, Figure 3	$T_A = +25^\circ C$	4		pC
NO or NC Capacitance	C_{OFF}	$V_{NO}, V_{NC} = GND$, $f = 1MHz$, Figure 5	$T_A = +25^\circ C$	17		pF
COM Off-Capacitance	C_{COM}	$V_{COM} = GND$, $f = 1MHz$, Figure 5	$T_A = +25^\circ C$	17		pF
COM On-Capacitance	C_{COM}	$V_{COM} = V_{NO}, V_{NC} = GND$, $f = 1MHz$, Figure 5	$T_A = +25^\circ C$	38		pF
Off-Isolation (Note 7)	V_{ISO}	$V_{NO} = V_{NC} = 1VRMS$, $R_L = 50\Omega$, $C_L = 5pF$, $f = 10MHz$, Figure 4	$T_A = +25^\circ C$		-55	dB
		$V_{NO} = V_{NC} = 1VRMS$, $R_L = 50\Omega$, $C_L = 5pF$, $f = 1MHz$, Figure 4	$T_A = +25^\circ C$		-75	
POWER SUPPLY						
Positive Supply Current	I_+	$V_+ = 3.3V$, $V_{IN} = 0$ or V_+ , all channels on or off	$T_A = +25^\circ C$	0.0001		μA
			$T_A = T_{MIN}$ to T_{MAX}		1.0	

Note 2: The algebraic convention, where the most negative value is a minimum and the most positive value is a maximum, is used in this data sheet.

Note 3: SOT packages are 100% production tested at $+25^\circ C$. Limits at the maximum rated temperature are guaranteed by correlation.

Note 4: Flatness is defined as the difference between the maximum and the minimum value of on-resistance as measured over the specified analog signal ranges.

Note 5: Guaranteed by design.

Note 6: Leakage parameters are 100% tested at $+85^\circ C$ and guaranteed by correlation at $+25^\circ C$.










Note 7: Off-Isolation = $20\log_{10}(V_{COM} / V_{NO})$, V_{COM} = output, V_{NO} = input to off switch.

Fast, Low-Voltage, 2.5Ω , SPST, CMOS Analog Switches

Typical Operating Characteristics

($T_A = +25^\circ\text{C}$, unless otherwise noted.)

MAX4645/MAX4646

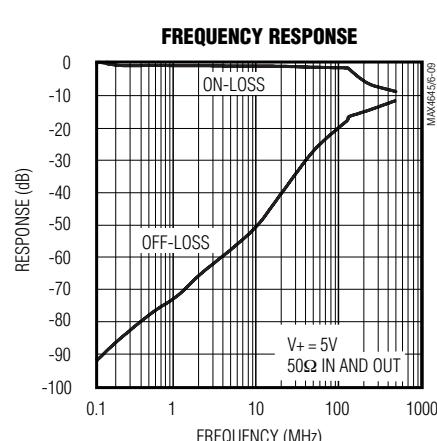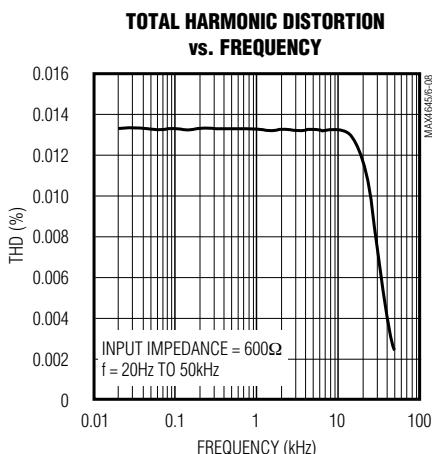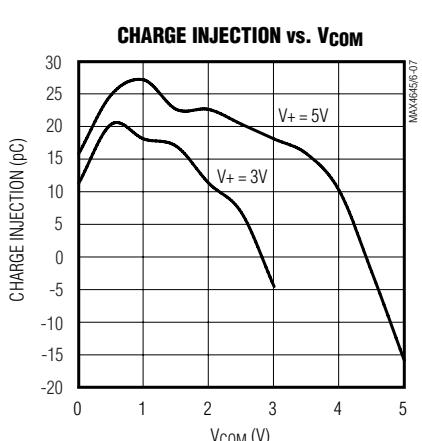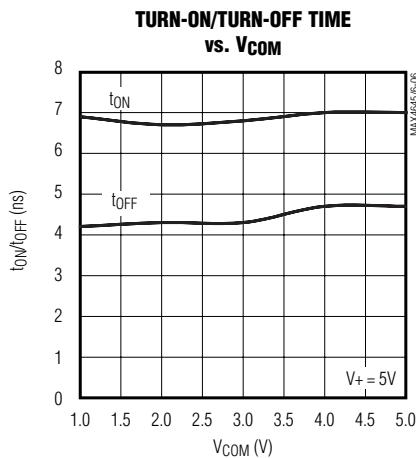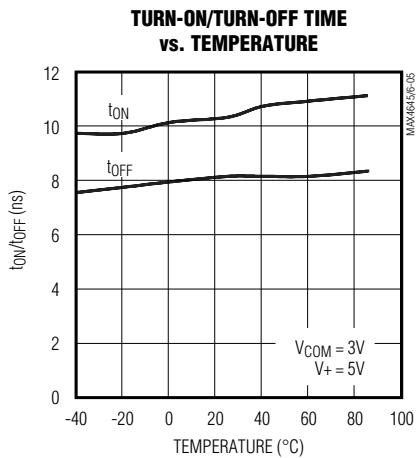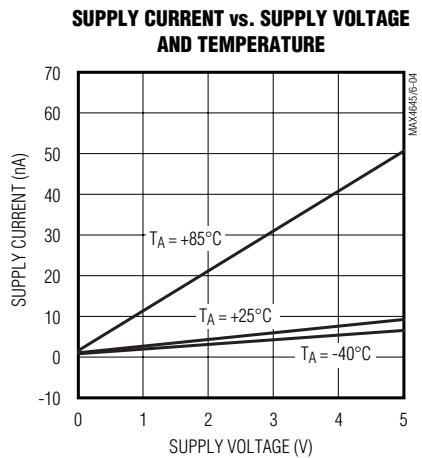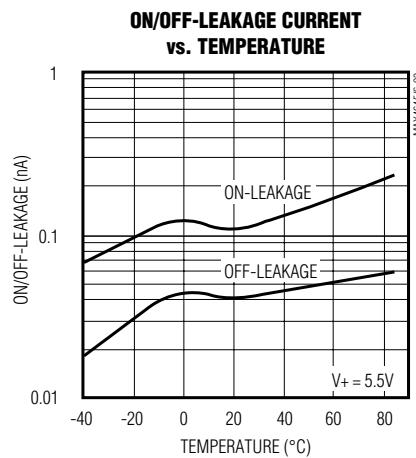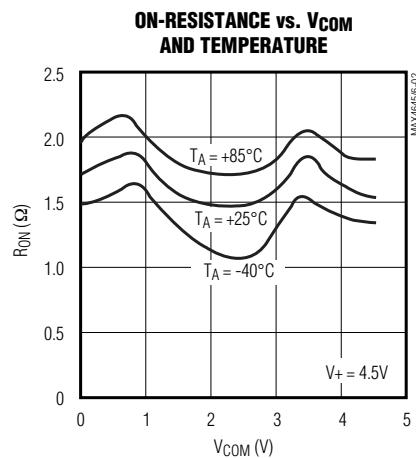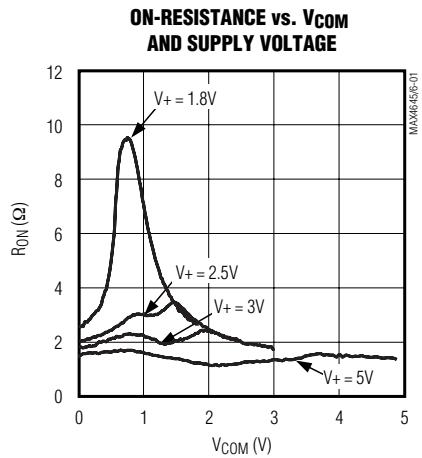

Fast, Low-Voltage, 2.5Ω , SPST, CMOS Analog Switches

Pin Description

PIN						NAME	FUNCTION
MAX4645			MAX4646				
SOT23-5	SOT23-6	μMAX	SOT23-5	SOT23-6	μMAX		
1	1	1	1	1	1	COM	Analog Switch Common Terminal
2	2	8	—	—	—	NO	Analog Switch Normally Open Terminal
—	—	—	2	2	8	NC	Analog Switch Normally Closed Terminal
3	3	7	3	3	7	GND	Ground
4	4	6	4	4	6	IN	Logic Control Input
—	5	2, 3, 5	—	5	2, 3, 5	N.C.	No Connection. Not internally connected.
5	6	4	5	6	4	V+	Positive Supply Voltage

Detailed Description

The MAX4645/MAX4646 are low 2.5Ω max on-resistance (at $V_+ = 5V$), low-voltage analog switches that operate from a +1.8V to +5.5V single supply. CMOS switch construction allows processing analog signals that are within the supply voltage range (GND to V_+).

Applications Information

Proper power-supply sequencing is recommended for all CMOS devices. Do not exceed the absolute maximum ratings because stresses beyond the listed ratings can cause permanent damage to the devices. Always sequence V_+ on first, followed by the logic inputs, NO, or COM. If power-supply sequencing is not possible, add two small signal diodes (D1, D2) in series with the supply pins for overvoltage protection (Figure 1). Adding these diodes reduces the analog signal by one diode drop below V_+ and one diode drop above GND, but does not affect the low switch resistance and low leakage characteristics of the device. Device operation is unchanged, and the difference between V_+ and GND should not exceed 6V.

Although it is not required, power-supply bypassing improves noise margin and prevents switching noise from propagating from the V_+ supply to other components. A $0.1\mu\text{F}$ capacitor, connected from V_+ to GND, is adequate for most applications.

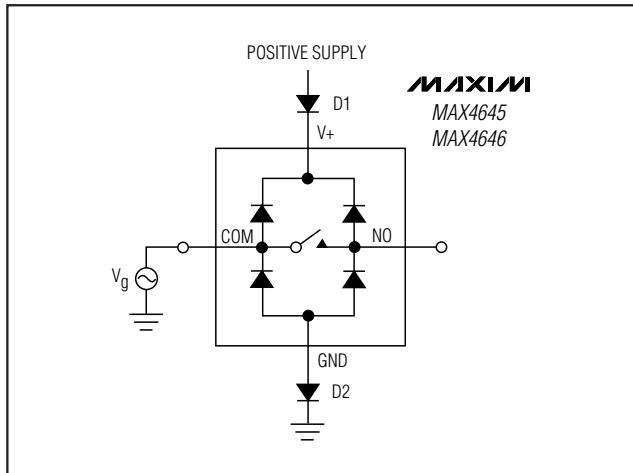


Figure 1. Overvoltage Protection Using Two External Blocking Diodes


Fast, Low-Voltage, 2.5Ω , SPST, CMOS Analog Switches

Test Circuits/Timing Diagrams

MAX4645/MAX4646


MAXIM

MAX4645
MAX4646

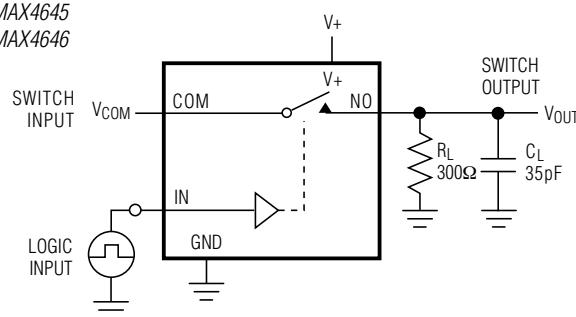

C_L INCLUDES FIXTURE AND STRAY CAPACITANCE.

$$V_{OUT} = V_{COM} \left(\frac{R_L}{R_L + R_{ON}} \right)$$

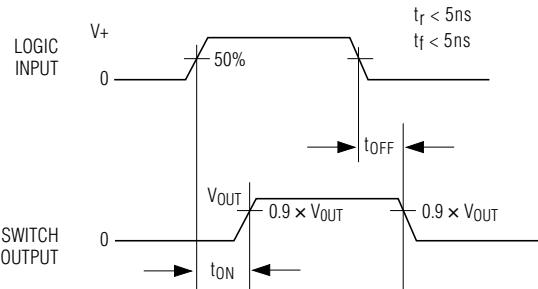

LOGIC INPUT WAVEFORMS INVERTED FOR SWITCHES THAT HAVE THE OPPOSITE LOGIC SENSE.

Figure 2. Switching Time

MAXIM

MAX4645
MAX4646

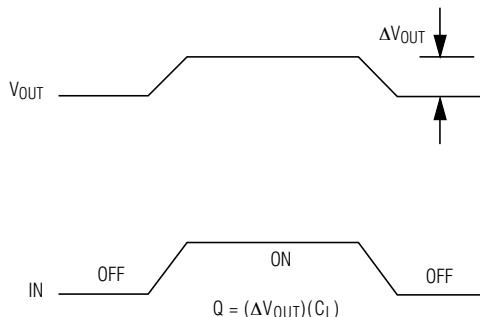
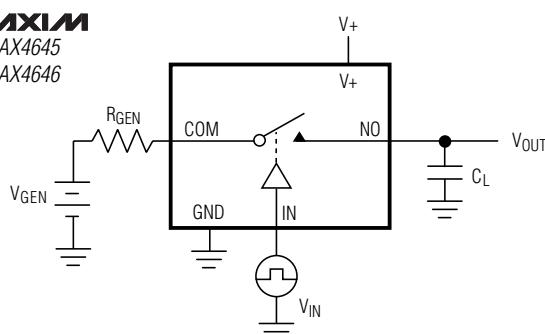


Figure 3. Charge Injection

MAXIM

Fast, Low-Voltage, 2.5Ω, SPST, CMOS Analog Switches

Test Circuits/Timing Diagrams (continued)

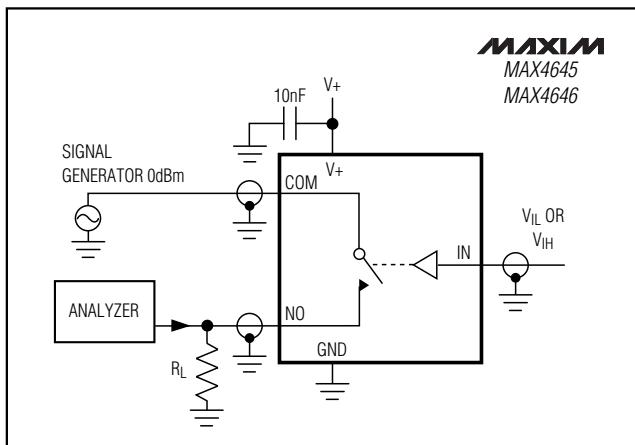


Figure 4. Off-Isolation/On-Channel Bandwidth


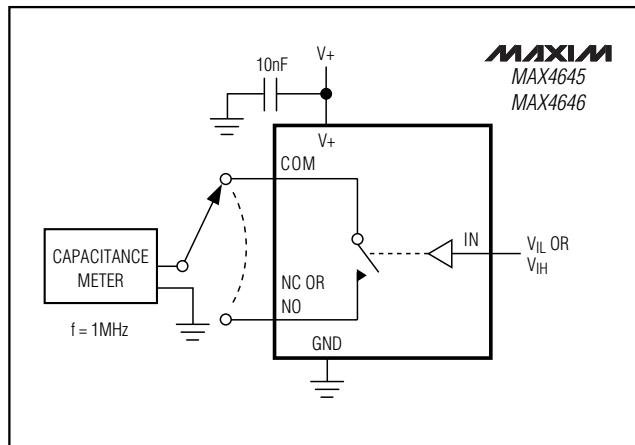


Figure 5. Channel Off/On-Capacitance

Pin Configurations/Functional Diagrams/Truth Tables (continued)

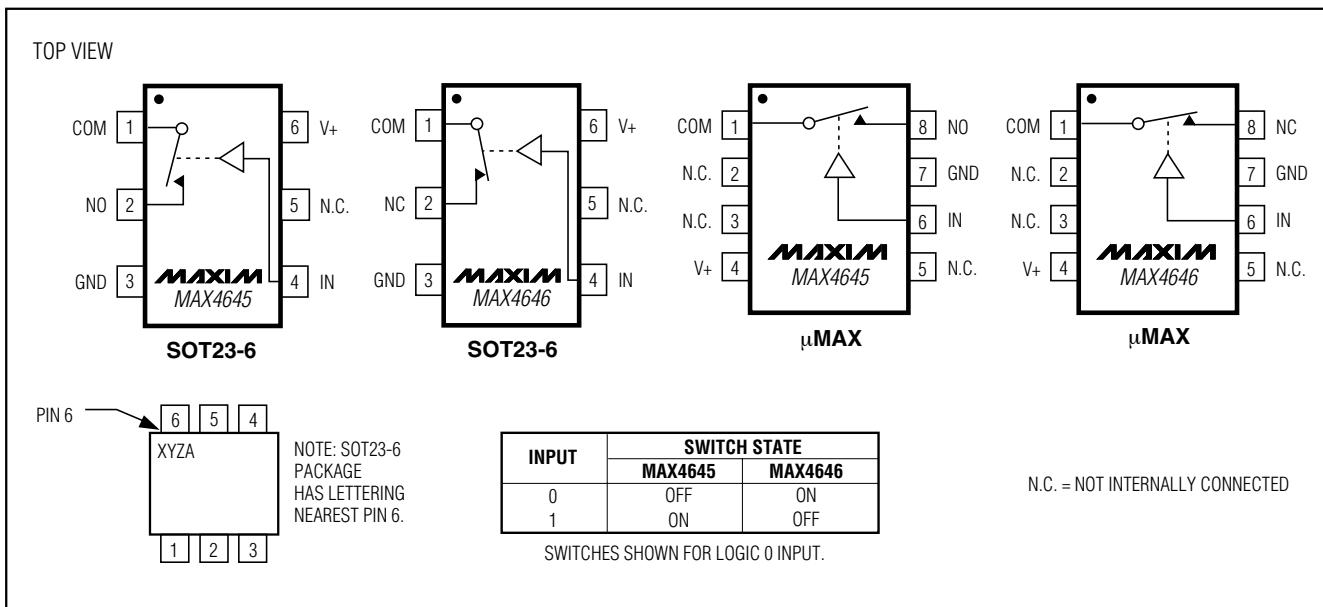


Chip Information

TRANSISTOR COUNT: 50

Fast, Low-Voltage, 2.5Ω, SPST, CMOS Analog Switches

Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to www.maxim-ic.com/packages.)

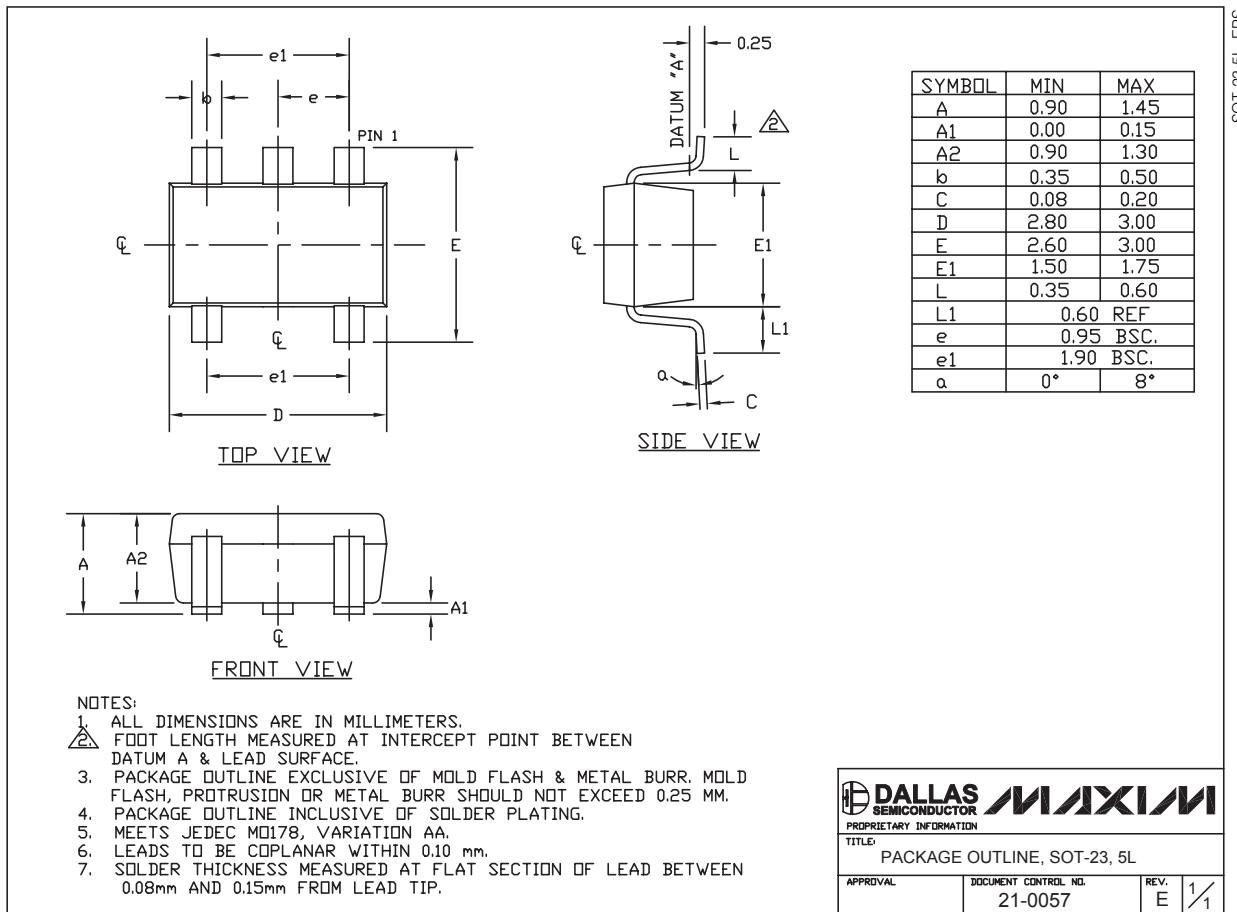

MAX4645/MAX4646


- NOTES:
- ALL DIMENSIONS ARE IN MILLIMETERS.
 - FOOT LENGTH MEASURED AT INTERCEPT POINT BETWEEN DATUM A & LEAD SURFACE.
 - PACKAGE OUTLINE EXCLUSIVE OF MOLD FLASH & METAL BURR. MOLD FLASH, PROTRUSION OR METAL BURR SHOULD NOT EXCEED 0.25 MM.
 - PACKAGE OUTLINE INCLUSIVE OF SOLDER PLATING.
 - MEETS JEDEC MO178, VARIATION AA.
 - LEADS TO BE COPLANAR WITHIN 0.10 mm.
 - SOLDER THICKNESS MEASURED AT FLAT SECTION OF LEAD BETWEEN 0.08mm AND 0.15mm FROM LEAD TIP.

DALLAS SEMICONDUCTOR		MAXIM
PROPRIETARY INFORMATION		
TITLE: PACKAGE OUTLINE, SOT-23, 5L		
APPROVAL	DOCUMENT CONTROL NO. 21-0057	REV. E 1/1

Fast, Low-Voltage, 2.5Ω, SPST, CMOS Analog Switches

Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to www.maxim-ic.com/packages.)

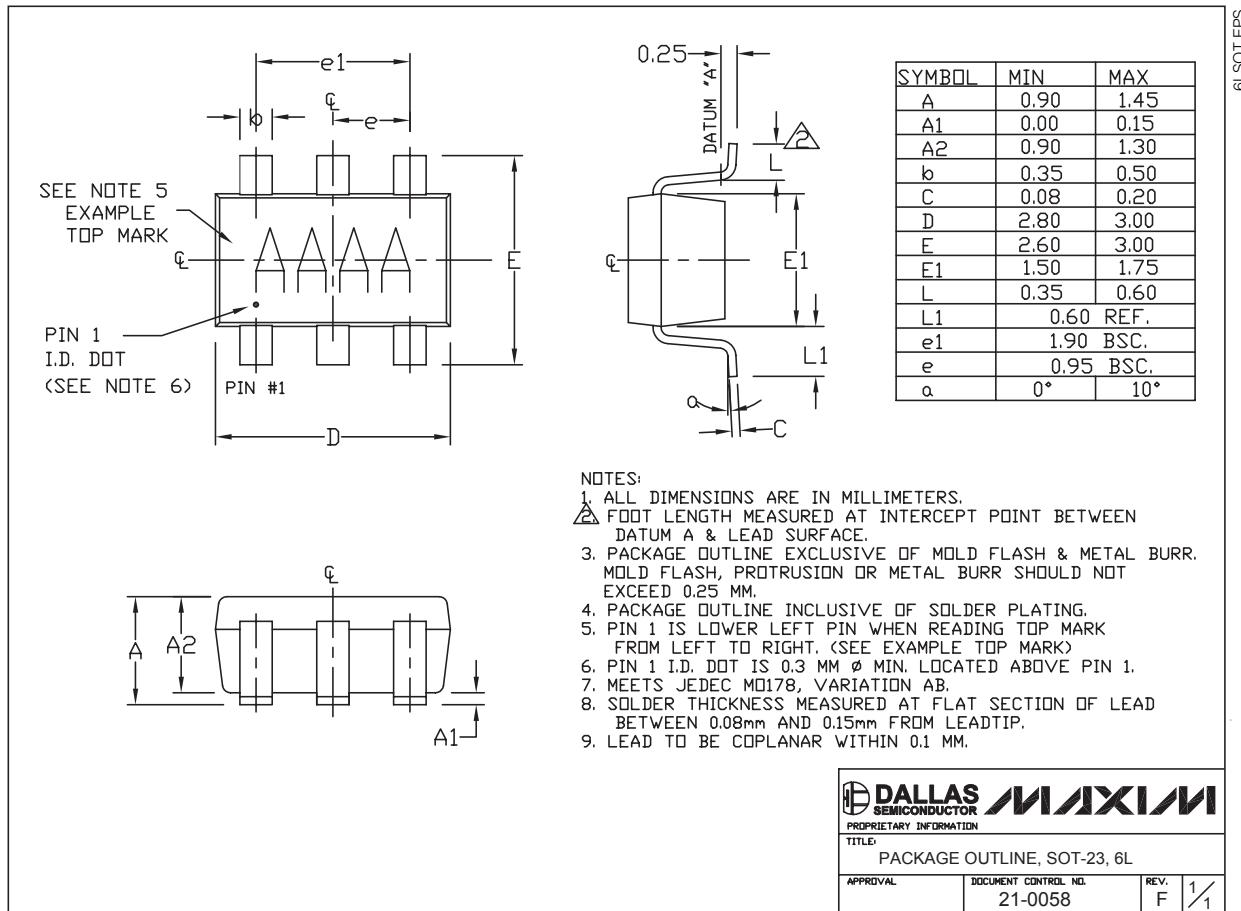


Fast, Low-Voltage, 2.5Ω, SPST, CMOS Analog Switches

Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to www.maxim-ic.com/packages.)

MAX4645/MAX4646

8LUMAXD.EPS

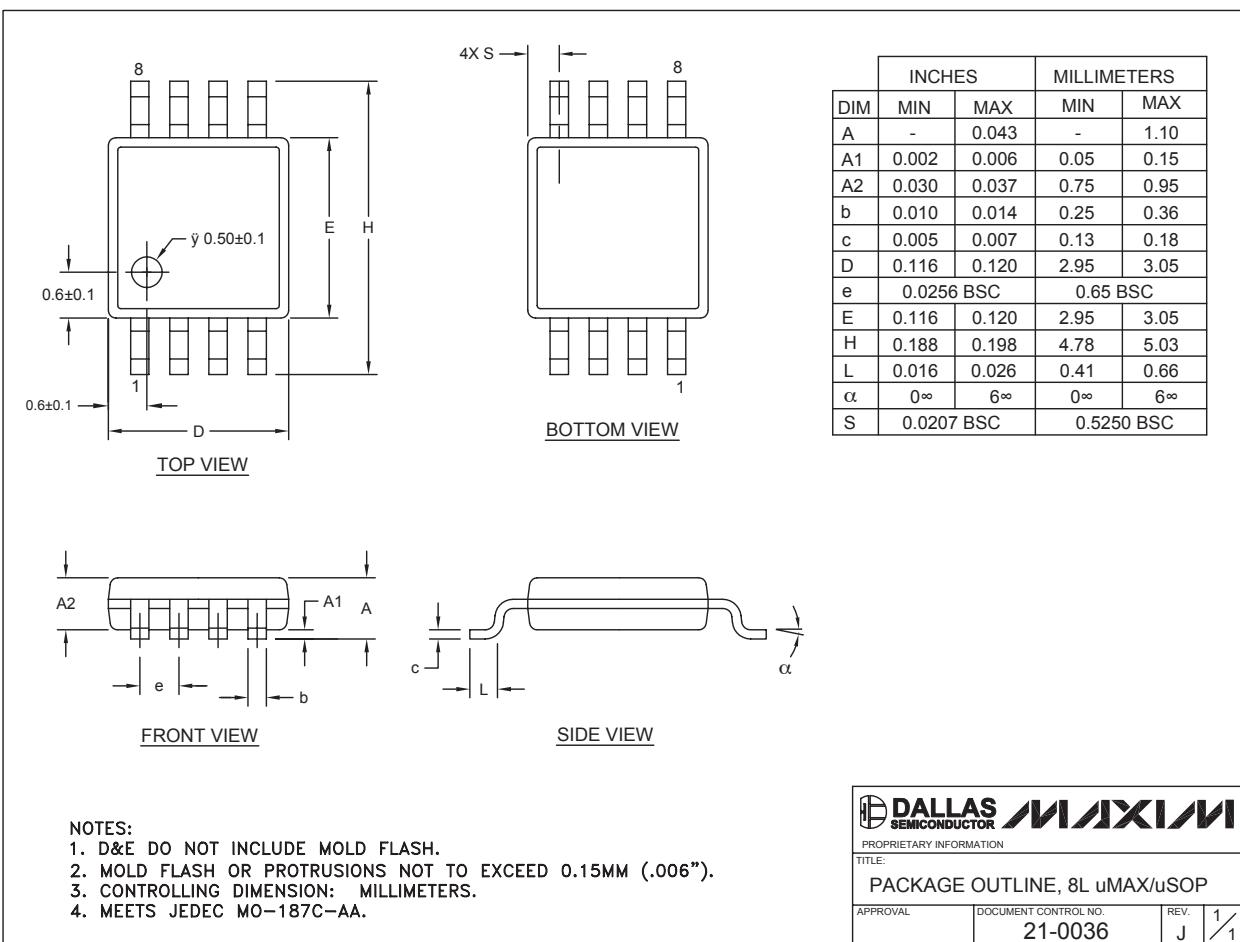

Note: The MAX4645/MAX4646 do not have an exposed paddle.



Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

11 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 (408) 737-7600**

Данный компонент на территории Российской Федерации**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru
moschip.ru_4

moschip.ru_6
moschip.ru_9