

# NDI & DM SERIES SPST STANDARD DIP SWITCHES

## FEATURES

High reliability.  
Self-cleaning contacts.  
Multi- positions.  
Process compatible with tape seal.  
Dual in-line .100" x .300" term. spacing.

## GENERAL SPECIFICATIONS

### ELECTRICALS

|                                      |                                                                |
|--------------------------------------|----------------------------------------------------------------|
| Electrical life                      | 2000 cycles min. per switch @ 24 VDC, 25 mA                    |
| Contact rating, non-switching        | 100 mA at 50 VDC                                               |
| Contact rating, switching            | 25 mA at 24 VDC                                                |
| Contact resistance at current 100 mA | 50 milliohms max. initial - 100 milliohms max. after life test |
| Insulation resistance at 500 VDC     | 100 Megohms minimum                                            |
| Dielectric strength                  | 500 VAC for 1 minute                                           |
| Capacitance                          | 5 pf. max. between adjacent terminals                          |

### MECHANICALS, THERMALS

|                             |                                                              |
|-----------------------------|--------------------------------------------------------------|
| Mechanical life             | 2000 cycles min. per switch                                  |
| Operating force             | 1000 grams max.                                              |
| Vibration                   | 10-55 Hz. per MIL-STD-202F METHOD 201A                       |
| Shock                       | 50 G (peak value) for 11 msec. per MIL-STD-202F, METHOD 213B |
| Operating temperature range | -20°C to 85°C                                                |

### SOLDERING & CLEANING RECOMMENDATIONS\*

|                           |                                                   |
|---------------------------|---------------------------------------------------|
| Hand soldering            | 350°C max. for 2 seconds max. (30 watt iron max.) |
| Wave soldering            | 260°C max. for 5 seconds max.                     |
| Cleaning (with tape seal) | Spray wash from top side only.                    |

\* Note: keep switches in "OFF" position during soldering and cleaning for best results

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

## MATERIALS


|               |                                                                                           |
|---------------|-------------------------------------------------------------------------------------------|
| Base & Cover  | NDI: UL94V-O, glass fiber filled PBT, black<br>DM: UL94V-O, glass fiber filled PPS, black |
| Actuators     | UL94V-O, Nylon, white                                                                     |
| Contacts      | Gold over nickel plated copper alloy                                                      |
| Terminals     | Gold plated brass.                                                                        |
| Term. Sealing | Molded-in                                                                                 |
| Tape seal     | Kapton                                                                                    |

## PACKAGING

DIP switches are shipped in standard IC tubes with all actuators in the "OFF" position.  
Tape & reel packaging per EIA available for DMR models (see next page).

## SWITCH CROSS SECTIONS

Double  
contact system




DI & DM

## SCHEMATIC (TYPICAL)



See tabulations on following pages for  
number of positions available (10 shown)

## NDI Series Machine Insertable $\varphi$

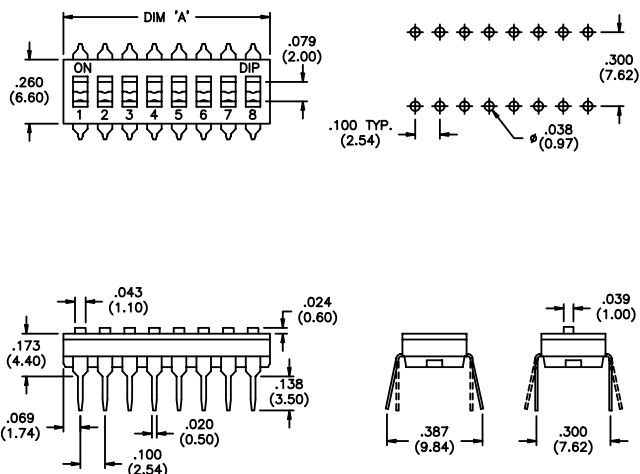


|          | Squared terminals           |                          | Spread terminals            |                          | No. of Pos. | 'A' Dim. +.008/-.000" (+0.2/-0.0mm) |
|----------|-----------------------------|--------------------------|-----------------------------|--------------------------|-------------|-------------------------------------|
|          | MODEL NO. with no tape seal | MODEL NO. with tape seal | MODEL NO. with no tape seal | MODEL NO. with tape seal |             |                                     |
| Raised   | NDI01H                      | n/a                      | NDI01S                      | n/a                      | 1           | .137 (3,48)                         |
|          | NDI02H                      | n/a                      | NDI02S                      | n/a                      | 2           | .237 (6,02)                         |
|          | NDI04H                      | n/a                      | NDI04S                      | n/a                      | 4           | .437 (11,10)                        |
|          | NDI06H                      | n/a                      | NDI06S                      | n/a                      | 6           | .637 (16,18)                        |
|          | NDI08H                      | n/a                      | NDI08S                      | n/a                      | 8           | .837 (21,26)                        |
| Recessed | NDI10H                      | n/a                      | NDI10S                      | n/a                      | 10          | 1.037 (26,34)                       |
|          | NDIR01H                     | n/a                      | NDIR01S                     | n/a                      | 1           | .137 (3,48)                         |
|          | NDIR02H                     | NDIR02HT                 | NDIR02S                     | NDIR02ST                 | 2           | .237 (6,02)                         |
|          | NDIR04H                     | NDIR04HT                 | NDIR04S                     | NDIR04ST                 | 4           | .437 (11,10)                        |
|          | NDIR06H                     | NDIR06HT                 | NDIR06S                     | NDIR06ST                 | 6           | .637 (16,18)                        |
|          | NDIR08H                     | NDIR08HT                 | NDIR08S                     | NDIR08ST                 | 8           | .837 (21,26)                        |
|          | NDIR10H                     | NDIR10HT                 | NDIR10S                     | NDIR10ST                 | 10          | 1.037 (26,34)                       |

$\varphi$  Auto-insertable using equipment from Amistar, Dynapert, Panasert, Northeastern Tool, Universal and others.

n/a = not available.

P

## DM Series Surface Mount $\varphi$

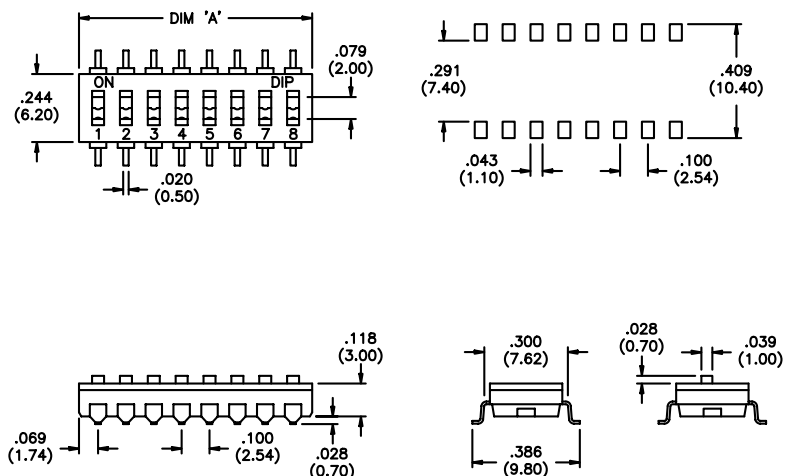

| Actuator Style    | MODEL NO. with no tape seal | MODEL NO. with tape seal | No. of Pos. | 'A' Dimension +.008/-.000" (+0.2/-0.0mm) |
|-------------------|-----------------------------|--------------------------|-------------|------------------------------------------|
| Raised Actuator   | DM01                        | n/a                      | 1           | .137 (3,48)                              |
|                   | DM02                        | n/a                      | 2           | .237 (6,02)                              |
|                   | DM03                        | n/a                      | 3           | .337 (8,56)                              |
|                   | DM04                        | n/a                      | 4           | .437 (11,10)                             |
|                   | DM05                        | n/a                      | 5           | .537 (13,64)                             |
|                   | DM06                        | n/a                      | 6           | .637 (16,18)                             |
|                   | DM07                        | n/a                      | 7           | .737 (18,72)                             |
|                   | DM08                        | n/a                      | 8           | .837 (21,26)                             |
|                   | DM09                        | n/a                      | 9           | .937 (23,80)                             |
|                   | DM10                        | n/a                      | 10          | 1.037 (26,34)                            |
|                   | DM12                        | n/a                      | 12          | 1.237 (31,42)                            |
| Recessed Actuator | DMR01                       | n/a                      | 1           | .137 (3,48)                              |
|                   | DMR02                       | DMR02T                   | 2           | .237 (6,02)                              |
|                   | DMR03                       | DMR03T                   | 3           | .337 (8,56)                              |
|                   | DMR04                       | DMR04T                   | 4           | .437 (11,10)                             |
|                   | DMR05                       | DMR05T                   | 5           | .537 (13,64)                             |
|                   | DMR06                       | DMR06T                   | 6           | .637 (16,18)                             |
|                   | DMR07                       | DMR07T                   | 7           | .737 (18,72)                             |
|                   | DMR08                       | DMR08T                   | 8           | .837 (21,26)                             |
|                   | DMR09                       | DMR09T                   | 9           | .937 (23,80)                             |
|                   | DMR10                       | DMR10T                   | 10          | 1.037 (26,34)                            |
|                   | DMR12                       | DMR12T                   | 12          | 1.237 (31,42)                            |

For tape & reel packaging on DMR models only, add 'TR' to model number - example: DMR08TTR. Note- tape & reel packaging is available only with tape seal models. 900 switches per reel.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9