


Nickel Thin Film Temperature Sensor

Temperature range -60 °C to +200 °C

Nickel thin film elements are characterized by a relatively high temperature coefficient. Typical applications include bearing temperature monitoring, HVAC temperature monitoring, and stator winding temperature monitoring.

Nominal Resistance R_0	Tolerance	Order number
1000 Ohms @ 0 °C	As per DIN 43760	100 489

Specification	DIN 43760
Temperature Range	-60 °C to +200 °C
Temperature Coefficient	6180 ppm/K
Lead wire material	Nickel
Protective coating	high-temperature epoxy
Self-heating	0,3K/mW in air
Response time	Water ($v = 0,2\text{m/sec.}$) $t_{0,9} = 0,3 \text{ sec.}$ Air ($v = 1\text{m/sec.}$) $t_{0,9} = 9 \text{ sec.}$
Operating Current, Maximum	5 mA

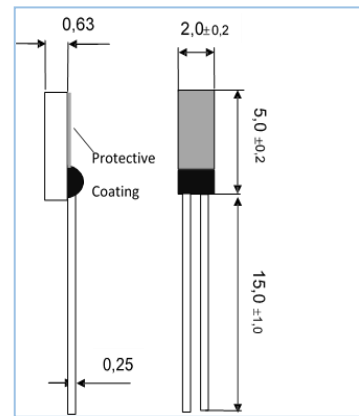

Polynomial of a nickel resistor in accordance with DIN 43760:

$$R(\vartheta) = R_0 \times (1 + 5,481 \times 10^{-3} \times \vartheta + 6,650 \times 10^{-6} \times \vartheta^2 + 2,805 \times 10^{-11} \times \vartheta^4 + 2,000 \times 10^{-17} \times \vartheta^6)$$

Maximum permissible tolerance as a function of temperature (DIN 43760):

$$\vartheta < 0^\circ\text{C}: F = \pm (0,4 + 0,028 \times \vartheta) \text{ } ^\circ\text{C}$$

$$\vartheta > 0^\circ\text{C}: F = \pm (0,4 + 0,007 \times \vartheta) \text{ } ^\circ\text{C}$$

California Proposition 65

WARNING: This product can expose you to chemicals including lead oxide, which is known to the State of California to cause cancer and birth defects or other reproductive harm, and including cobalt oxide, nickel and cobalt, which are known to the State of California to cause cancer. For more information go to www.p65warnings.ca.gov.



The information provided in this data sheet describes certain technical characteristics of the product, but shall not be qualified or construed as quality guarantees whatsoever. Furthermore, the information provided in this data sheet does not constitute a warranty, implied or express, whatsoever, including but not limited to warranties of merchantability, fitness for a particular purpose, or use.


The information provided in this data sheet regarding measurement values (including, but not limited to, response time, long-term stability, vibration and shock resistance, insulation resistance and self-heating) are average values that have been obtained under laboratory conditions in tests of large numbers of the product. Product results or measurements achieved by customer or any other person in any production, test, or other environment may vary depending on the specific conditions of use.

The customer is solely responsible to determine whether the product is suited for customer's intended use; in this respect Heraeus cannot assume any liability. The sale of any products of Heraeus is exclusively subject to the Terms and Conditions of Sale of Heraeus in their current version at the time of purchase, which is available under www.heraeus.com/gtc or may be furnished upon request. This data sheet is subject to changes without prior notice.

Heraeus Nexensos USA, a division of Heraeus Epurio LLC, 770 Township Line Road, Suite 300, Yardley, Pennsylvania, USA 19067

Web: www.heraeus-nexensos.com

Status: 10/2019

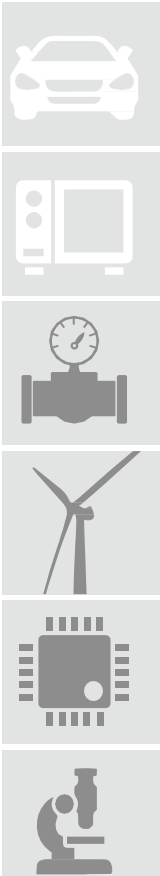

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9