

## 3NT | SERIES

### FIXED TEMPERATURE THERMOSTATS

#### Introduction

Automatic reset thermostat designed to meet your specific application requirements. Its patented and tamper proof snap action bi-metal disc provides reliable and repeatable switch actuation. The 3NT is suitable for electrical loads ranging from dry circuits to 10A @ 240 VAC.

The core of the 3NT is the proven 1NT thermostat. Recognized by UL/CSA and KEMA/ENEC agencies, hundreds of millions of the 1NT device are in the field today used in a variety of HVAC, appliance, automotive and specialty applications.

Manufactured at ISO 9001 certified manufacturing sites, its dry seal allows direct integration of the thermostat into a wire harness eliminating the need for extra connections.



#### Features

- Automatic reset
- Small and easy to mount
- Fast thermal response
- Innovative dry seal design - protects from moisture and dust
- Reliable 100K cycle life
- High temperature - to 275°F (135°C)

#### Applications

- HVAC
- Commercial
- Dehumidifiers
- Freezers
- Heat pumps
- Ice makers
- Refrigerators
- Condensing or moist environments




#### SPECIFICATIONS

| Electrical Ratings                              | Agency                                                                                                                 | Cycles<br>x1000 | Volts   | FLA  | LRA  | Amps<br>(resistive) | VA  |
|-------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|-----------------|---------|------|------|---------------------|-----|
|                                                 | UL<br>(USA, Canada)                                                                                                    | 100             | 120 Vac | 5.8  | 34.8 | 10                  | 125 |
|                                                 |                                                                                                                        | 100             | 240 Vac | 2.9  | 17.4 | 10                  | 125 |
|                                                 |                                                                                                                        | 30              | 120 Vac | 10.0 | 40.0 |                     |     |
|                                                 |                                                                                                                        | 30              | 240 Vac | 10.0 | 40.0 |                     |     |
|                                                 |                                                                                                                        | 100             | 30 Vdc  |      |      | 1                   |     |
|                                                 | ENEC (Europe)                                                                                                          | 30              | 240 Vac |      |      | 16                  |     |
| <b>Operating Temperature</b>                    | -20 to 135°C (-4 to 275°F)                                                                                             |                 |         |      |      |                     |     |
| <b>Ambient Temperature</b>                      | -40°C to maximum wire lead insulation                                                                                  |                 |         |      |      |                     |     |
| <b>Temperature rating</b>                       | PVC - 105°C<br>XLP - 125°C<br>(Allow 15°C de-rating below wire insulation rating at maximum 10A current)               |                 |         |      |      |                     |     |
| <b>Minimum Nominal Temperature Differential</b> | 8°C (15°F)                                                                                                             |                 |         |      |      |                     |     |
| <b>Dielectric Strength</b>                      | 750 Vrms<br>1500 Vrms terminals to case                                                                                |                 |         |      |      |                     |     |
| <b>Standard Wire Leads</b>                      | 18 AWG (1/32" or 1/16" wall thickness in either 105°C PVC or 125°C XLPE)<br>16 AWG (1/32" wall thickness in 105°C PVC) |                 |         |      |      |                     |     |



## 3NT DRY SEAL DESIGN

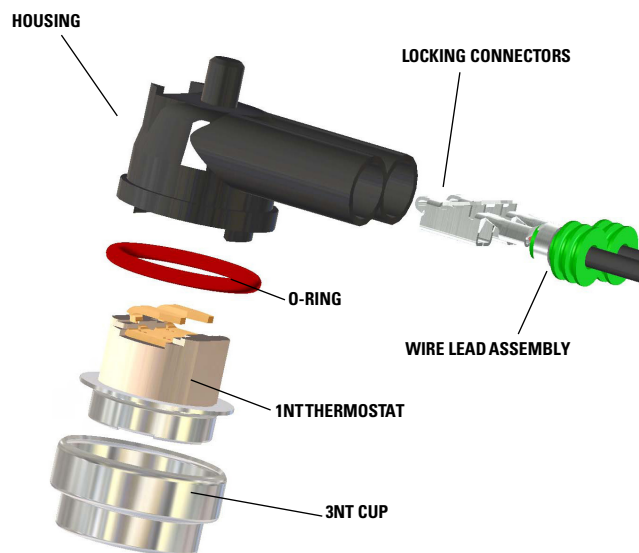

**Important Notice:** The 3NT is not hermetically sealed, and should not be submerged in liquid. For such applications, please contact Sensata.



## STANDARD TEMPERATURES AND TOLERANCES

| Nominal Top Temperature   |                          | Nominal Differential |         | Open Temperature |      | Close Temperature |      |
|---------------------------|--------------------------|----------------------|---------|------------------|------|-------------------|------|
| °F                        | °C                       | °F                   | °C      | °F               | °C   | °F                | °C   |
| 32 to 80                  | 0 to 27                  | 20 - 29              | 11 - 16 | ±5.5             | ±3   | ±7.5              | ±4   |
|                           |                          | 30 - 38              | 17 - 21 | ±5.5             | ±3   | ±8.5              | ±4.5 |
|                           |                          | 39 - 60              | 22 - 33 | ±5.5             | ±3   | ±10               | ±5.5 |
| 81 to 167                 | 28 to 75                 | 20 - 23              | 11 - 13 | ±5.5             | ±3   | ±7.5              | ±4   |
|                           |                          | 24 - 29              | 14 - 16 | ±5.5             | ±3   | ±8.5              | ±4.5 |
|                           |                          | 30 - 59              | 17 - 33 | ±5.5             | ±3   | ±10               | ±5.5 |
| 168 to 199 <sup>(1)</sup> | 76 to 93 <sup>(1)</sup>  | 20 - 23              | 11 - 13 | ±5.5             | ±3   | ±7.5              | ±4   |
|                           |                          | 24 - 29              | 14 - 16 | ±5.5             | ±3   | ±8.5              | ±4.5 |
|                           |                          | 30 - 59              | 17 - 33 | ±5.5             | ±3   | ±9                | ±5   |
| 200 to 249 <sup>(1)</sup> | 94 to 121 <sup>(1)</sup> | 20 - 29              | 11 - 16 | ±6.5             | ±3.5 | ±8.5              | ±4.5 |
|                           |                          | 30 - 38              | 17 - 21 | ±6.5             | ±3.5 | ±10               | ±5.5 |
|                           |                          | 39 - 59              | 22 - 33 | ±6.5             | ±3.5 | ±12               | ±6.5 |
|                           |                          | 60 - 99              | 34 - 55 | ±10              | ±5.5 | ±20               | ±11  |
| 250 to 275                | 122 to 135               | 24 - 38              | 14 - 21 | ±7.5             | ±4   | ±10               | ±5.5 |
|                           |                          | 39 - 59              | 22 - 33 | ±7.5             | ±4   | ±14.5             | ±8   |
|                           |                          | 60 - 99              | 34 - 55 | ±10              | ±5.5 | ±20               | ±11  |


<sup>(1)</sup> Minimum bottom temperature of 50°C (122°F)




## TYPICAL PHYSICAL CHARACTERISTICS

Dimensions in mm (inches)

**Basic 3NT Dimensions**

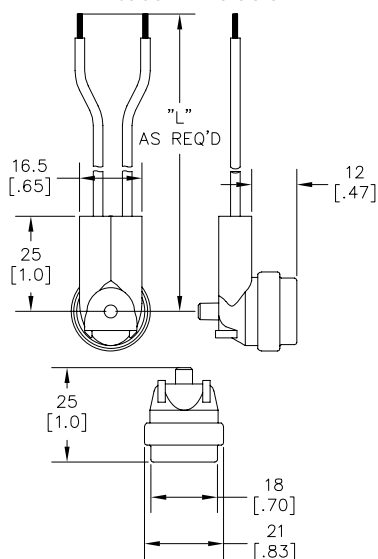


**Open Tube Mount Clip (3/8 Inch Shown at 90° CCW Rotation) 90° and 180° CW Rotations Available**

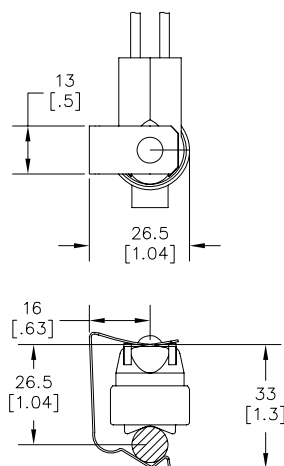


Additional Clips Available for [1/4], [5/16], [1/2], [5/8] tubes

**Surface Mount Clip**

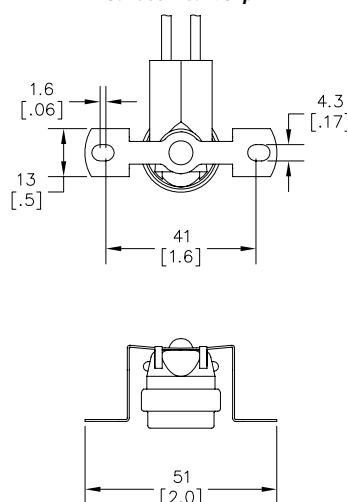


**Snap Tube Mount Clip For 5/8 Inch and 1/2 Inch Tubes**

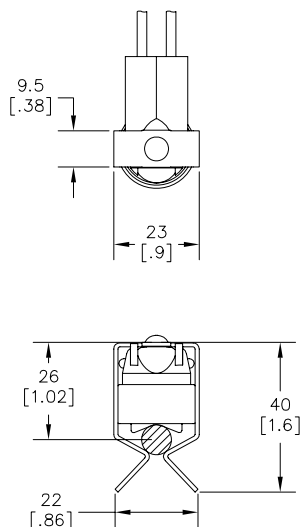

Additional Clips Available for [3/4], [7/8] tubes

**Locking Tube Mount Clip (3/8 Inch Shown)**

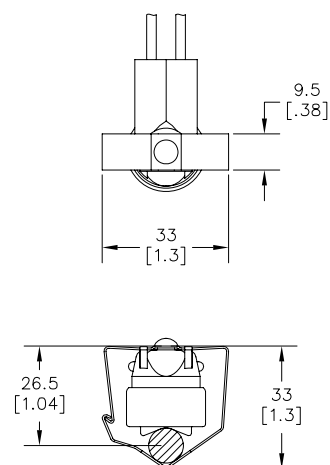

Additional Clips Available for [1/4], [5/16], [1/2], [5/8] tubes



## ORDERING OPTIONS

### Part Number

|                                |     |    |   |   |      |
|--------------------------------|-----|----|---|---|------|
|                                | 3NT | 01 | L | H | XXXX |
| Family                         |     |    |   |   |      |
| 3NT                            |     |    |   |   |      |
| Contact Material               |     |    |   |   |      |
| 01: Silver                     |     |    |   |   |      |
| 11: Gold <12V or <100 mA       |     |    |   |   |      |
| Switch Opening Logic           |     |    |   |   |      |
| L: On Temp. Rise               |     |    |   |   |      |
| F: On Temp. fall               |     |    |   |   |      |
| Dry Seal Construction          |     |    |   |   |      |
| H: High Temp. (Silicon rubber) |     |    |   |   |      |
| N: No leads                    |     |    |   |   |      |
| ID Number                      |     |    |   |   |      |
| -Temperature Code              |     |    |   |   |      |
| -Wire Leads                    |     |    |   |   |      |
| -Specifications                |     |    |   |   |      |
| -Terminals and Mounting Clip   |     |    |   |   |      |

### Temperature Code

|                                     |   |    |   |    |
|-------------------------------------|---|----|---|----|
|                                     | L | 50 | F | 30 |
| Operating Temperature               |   |    |   |    |
| L: Limit                            |   |    |   |    |
| F: Fan                              |   |    |   |    |
| Operating Temperature               |   |    |   |    |
| Nominal Opening                     |   |    |   |    |
| Temperature                         |   |    |   |    |
| Temp. Code                          |   |    |   |    |
| C: Celsius                          |   |    |   |    |
| F: Fahrenheit                       |   |    |   |    |
| Differential                        |   |    |   |    |
| Difference between Nominal Open and |   |    |   |    |
| Nominal Close Temperature           |   |    |   |    |



## AGENCY APPROVALS & CERTIFICATIONS

|                            | File/Report Number | Category                            |
|----------------------------|--------------------|-------------------------------------|
| UL (USA) <sup>(2)</sup>    | SA995              | Category SDFY2                      |
| UL (CANADA) <sup>(2)</sup> | SA995              | Category SDFY8                      |
| DEKRA (ENEC)               | 2014531.16         | EN60730-1, EN60730-2-9              |
| DEKRA (IECEX)              | 21862646400        | IEC60079-0, IEC60079-15<br>IEC60529 |

<sup>(2)</sup> Recognized to US and Canadian requirements by Underwriters Laboratories (UL873 and C22.2 No. 24)

### IMPORTANT NOTICE

These devices may not be used as service components, strictly for use by Original Equipment Manufacturer, not repair. **USERS ARE SOLELY RESPONSIBLE** for design application and function of the end use product. Users must evaluate the suitability of these devices to their application with respect to temperature settings, mechanical cycle life, electrical loading and environmental conditions. This product is not hermetically sealed, it should not be submerged in any liquid. This product is not rated as explosion proof and should not be applied in any application where flammable vapors, gases or dust may be present. End of life failure of this device may result in either open or closed circuit condition. Suitable "End of life" protection should be applied in series with this device per safety agency specifications.



## WARNINGS



### RISK OF MATERIAL DAMAGE AND HOT ENCLOSURE

- The product's side panels may be hot, allow the product to cool before touching
- Follow proper mounting instructions including torque values
- Do not allow liquids or foreign objects to enter this product

**Failure to follow these instructions can result in serious injury, or equipment damage.**



### HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARCH FLASH

- Disconnect all power before installing or working with this equipment
- Verify all connections and replace all covers before turning on power

**Failure to follow these instructions will result in death or serious injury**

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at [www.sensata.com](http://www.sensata.com) SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

## CONTACT US

### Americas

+1 (888) 438 2214  
[sensors@sensata.com](mailto:sensors@sensata.com)

### Europe, Middle East & Africa

+359 (2) 804 7165  
[temperature-info.eu@sensata.com](mailto:temperature-info.eu@sensata.com)

### Asia Pacific

[sales.isasia@list.sensata.com](mailto:sales.isasia@list.sensata.com)  
China +86 (21) 2306 1500

Japan +81 (45) 277 7117

Korea +82-10-9218-1179

India +91 (80) 67920890

Rest of Asia +886 (2) 27602006  
ext 2808

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9