
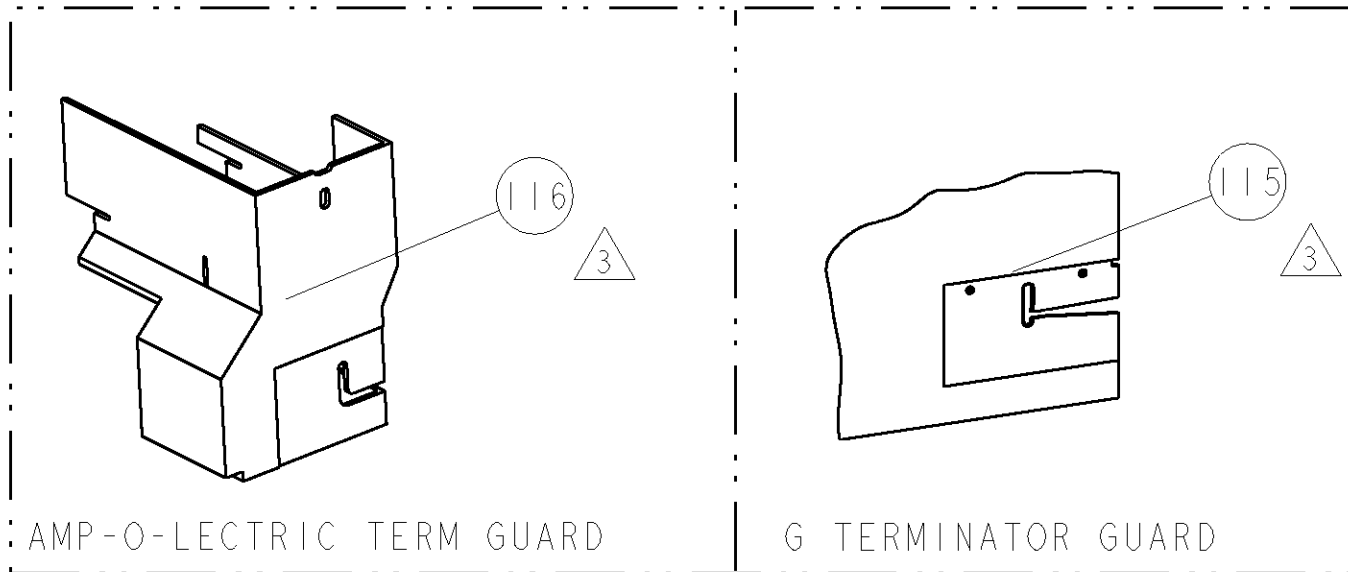
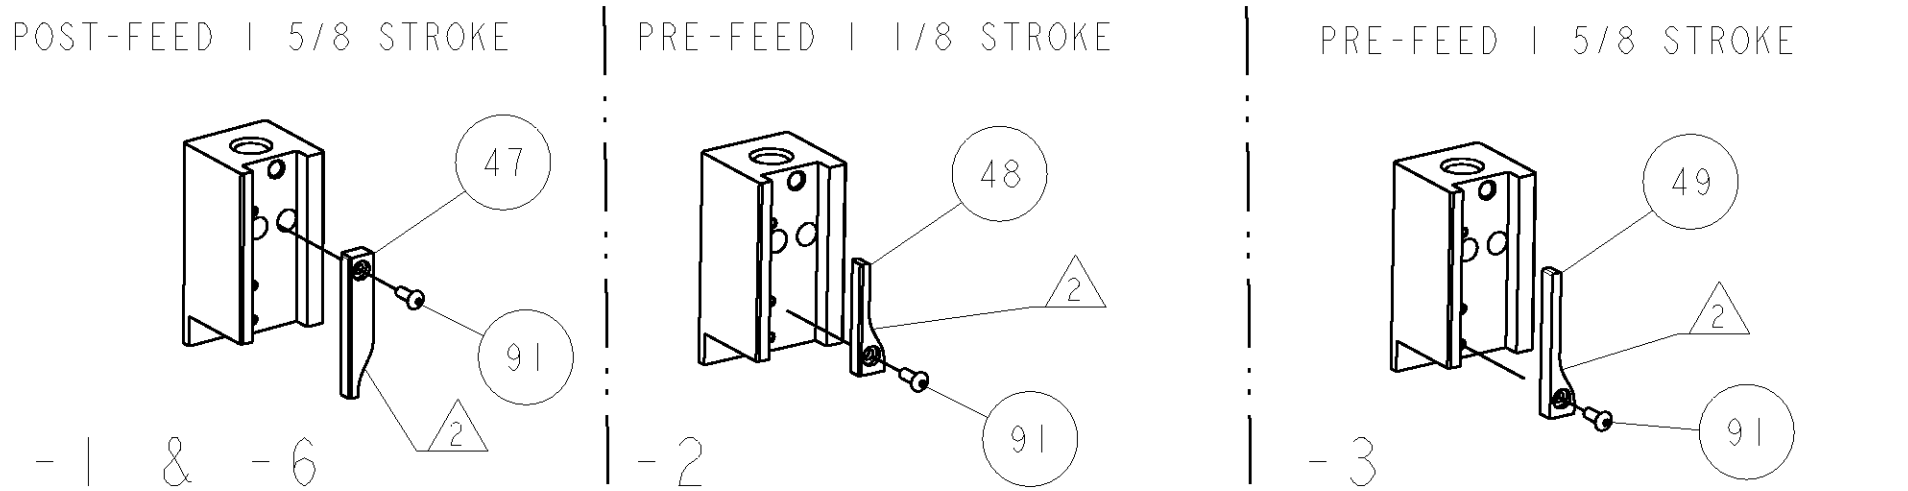
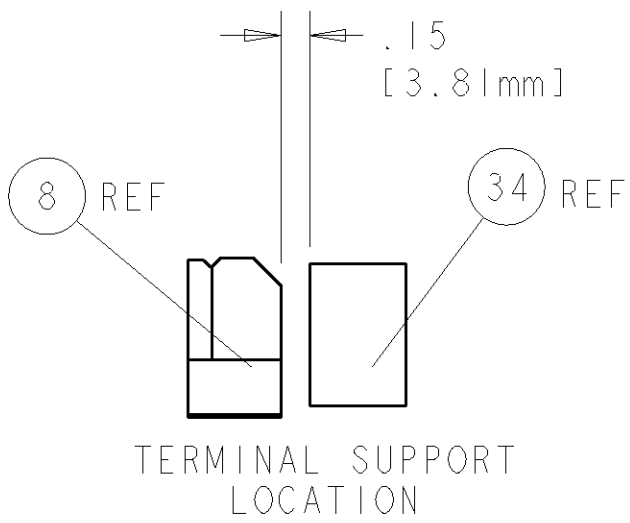




8				7			
THIS DRAWING IS UNPUBLISHED.				RELEASED FOR PUBLICATION			
COPYRIGHT 20				BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.			
PART NUMBER		REV	FIRST USED	POWER UNIT	FEED TYPE	DESCRIPTION	
1855502-1		A	122500-1	LEADMAKER	POST FEED	CUTS CARRIER	
1855502-2		A	565435-5	BENCH MODEL K	PRE FEED	CUTS CARRIER	
1855502-3		A	354500-1	BENCH MODEL G	PRE FEED	CUTS CARRIER	
1855502-6		A	122500-1	LEADMAKER	POST FEED	CONTINUOUS CARRIER	
7-1855502-7		A	-	-	-	SPARE PARTS	

- △ RECOMMENDED SPARE PARTS
- △ GREASE LIGHTLY
- △ GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE
- △ APPLY TORQ-SEAL IN ALLEN SOCKET TO FILL HOLE AFTER FLAT HD HAS BEEN ADJUSTED TO CORRECT HEIGHT AT QUALIFICATION. APPLY PN 1-23419-5 LOC-TITE TO THREADS.
- △ THE INSULATION RANGE LISTED IS FOR THE TERMINAL. THE INSULATION RANGE FOR THE SEAL IS Ø1.2mm-1.9mm.

*** WARNING**
ON INSTALLATION, SET WIRE DISC TO LARGEST WIRE SIZE SETTING. USE OF SETTINGS BELOW MIN. REQUIRED CRIMP HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.

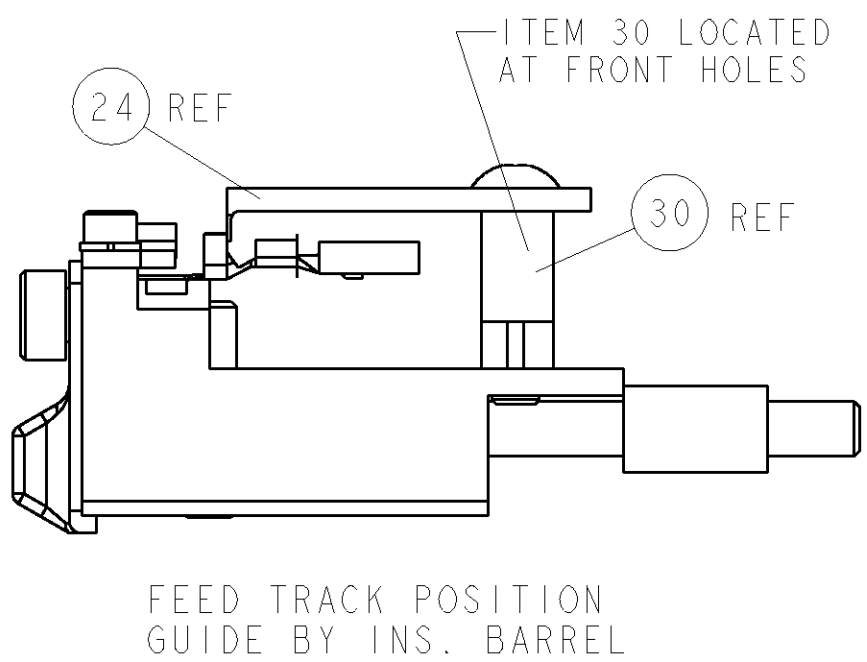

TERMINAL NAME: TAXI TERMINAL F GT 150					
TE PN	DELPHI	DELPHI TERMINAL - DELPHI CRIMP SPECS			
1949949	15326426				
-	-	CRIMP HEIGHT		WIRE SIZE	
-	-	1.15mm+.05/- .05[.045+ .002/- .002]		20AWG or 0.5mm2	
-	-	1.10mm+.05/- .05[.043+ .002/- .002]		22AWG or 0.35mm2	
-	-				
-	-				
-	-				
SEAL PN	-	CRIMP	SIZE	TYPE	RANGE
286970	15366021	WIRE	1.75mm [.069]	F	22-20 AWG
-	-	INSUL	3.56mm [.140]	O	Ø3.00 MAX
WIRE STRIP LENGTH 4.94-5.32	TERM-APPL SPEC DELPHI	FEED 10.96	APPLICATOR INSTRUCTIONS 408-8040		SET UP GAGE 458637-1

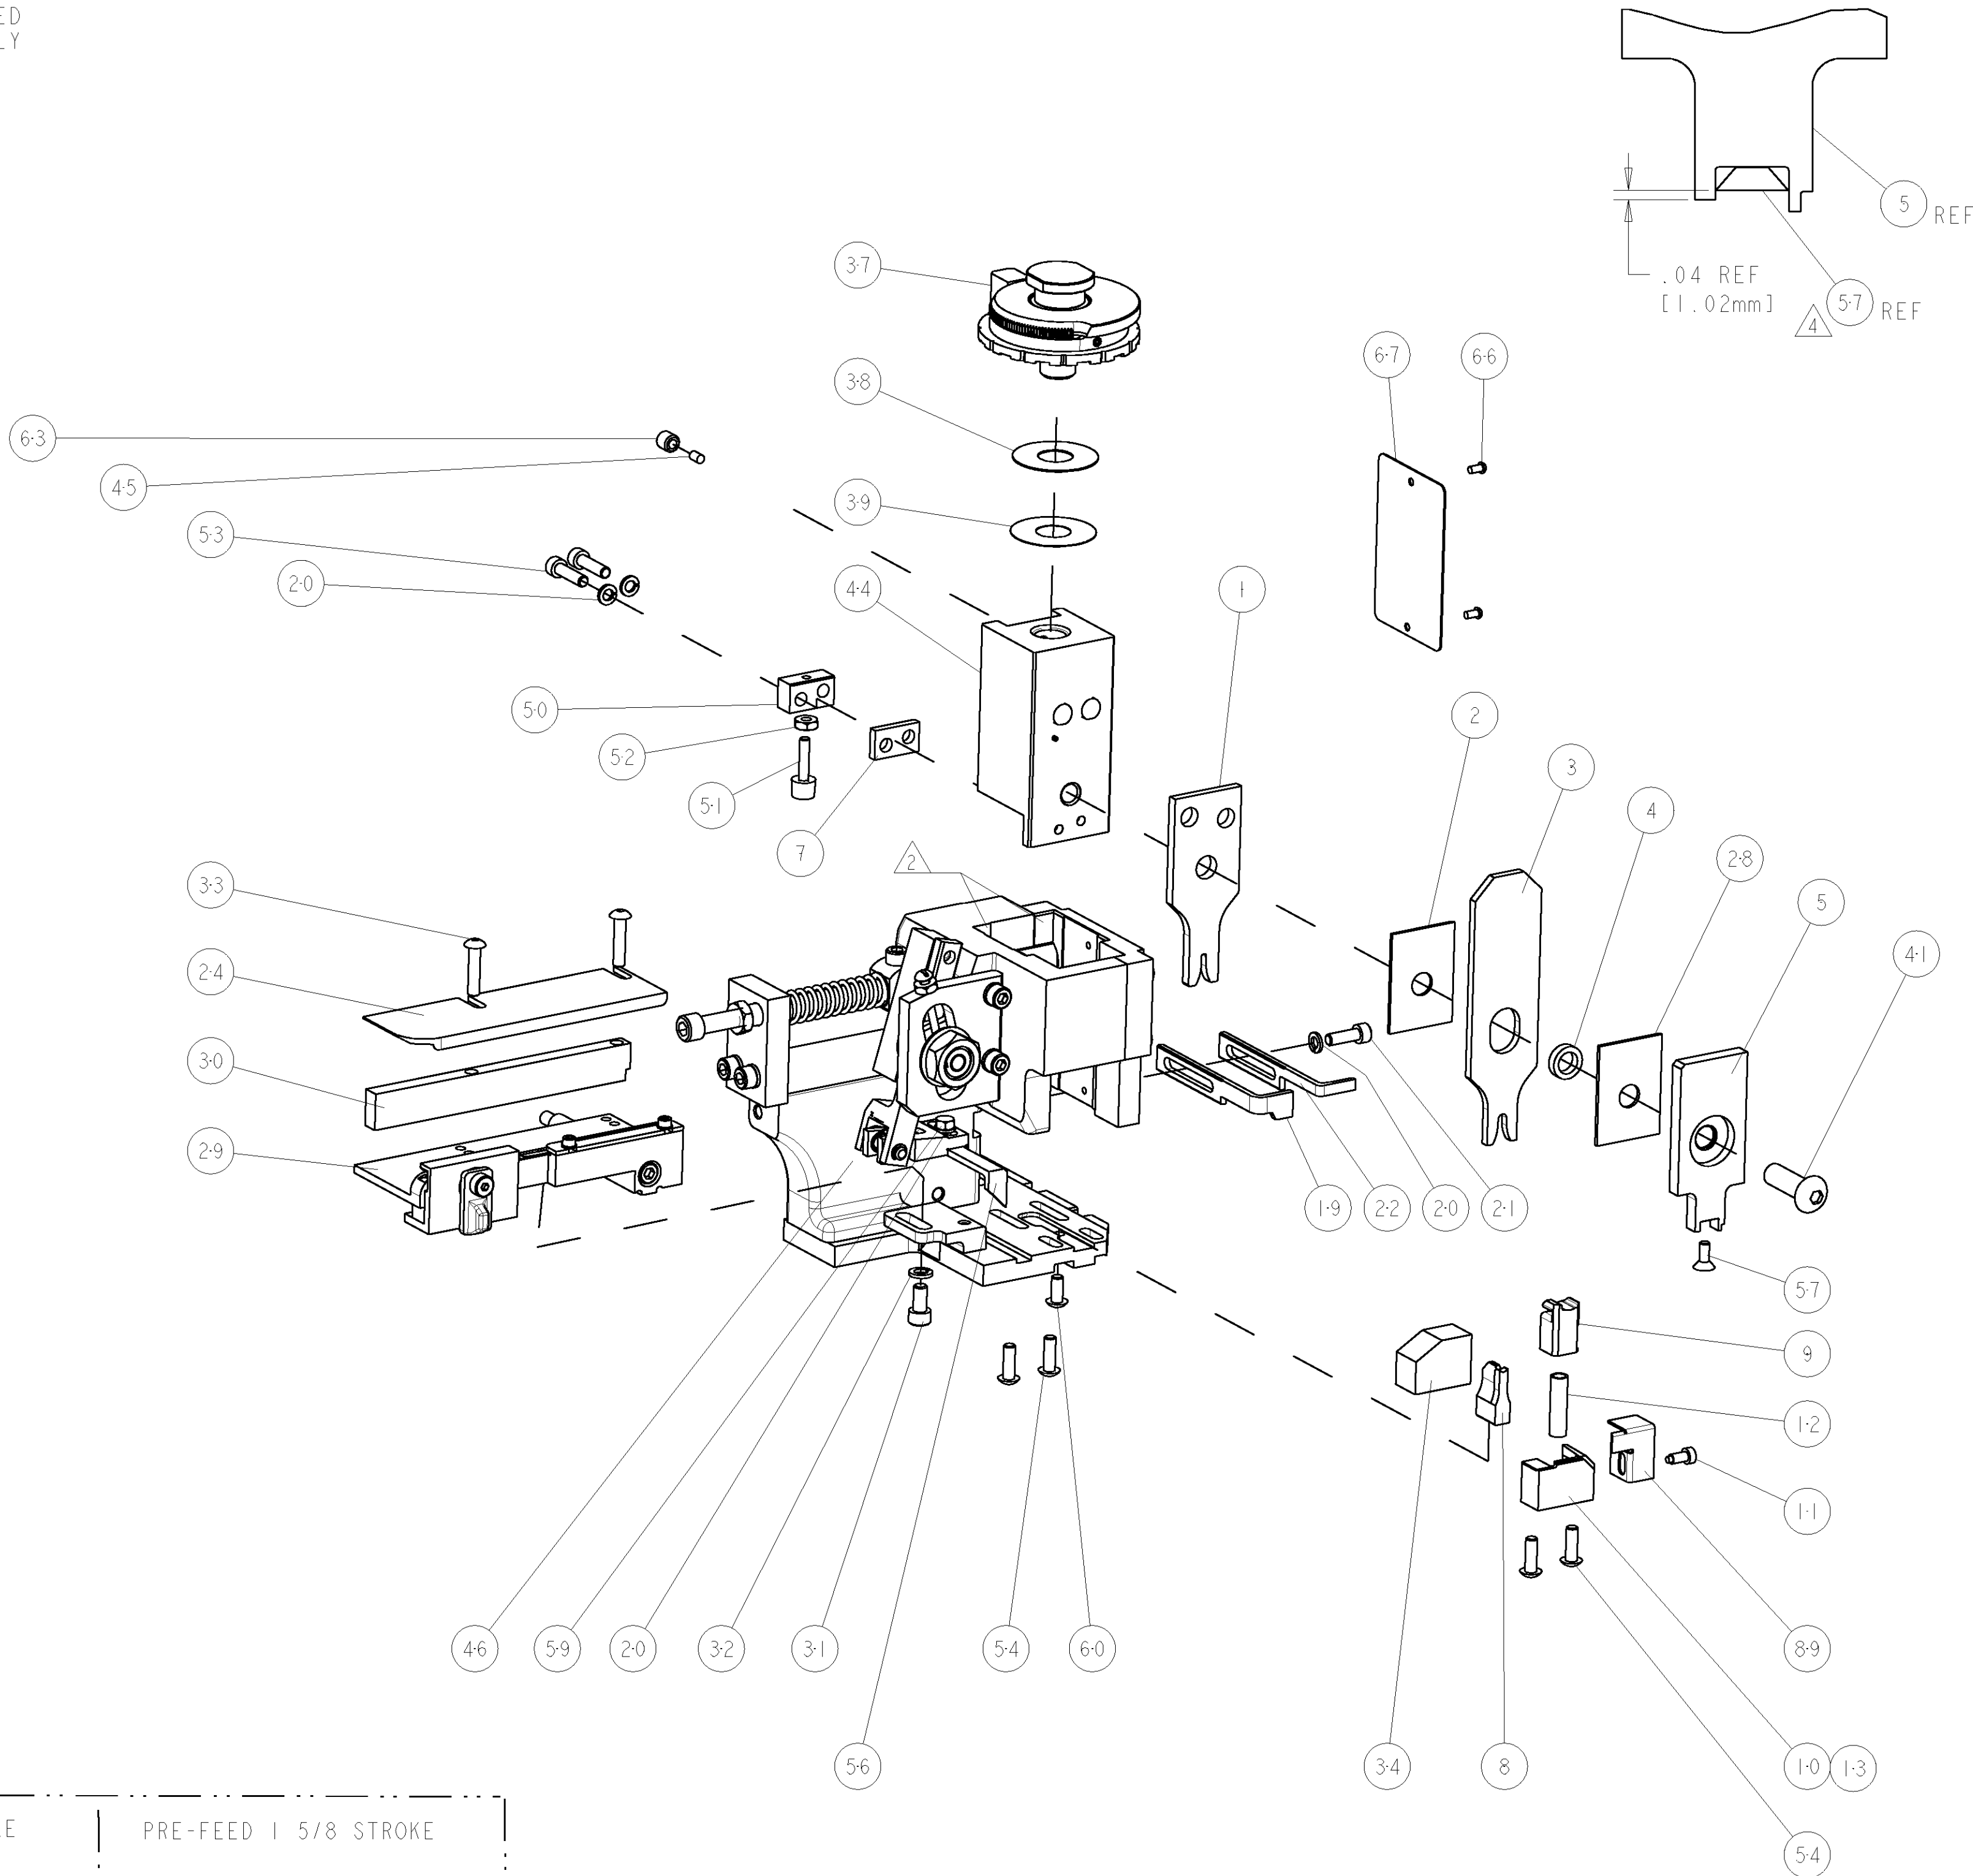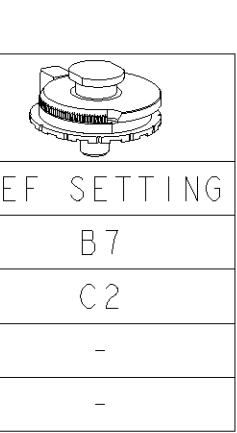

△	-	-	-	REF	-	..	455749-1	GUARD WINDOW	116
△	-	-	REF	-	-	..	679532-1	INSERT, GUARD	115
-	1	1	1	1	-	-	1-21002-7	SCR, BTN SKT HD CAP 6-32 X .375	91
-	1	1	1	1	-	-	318563-1	GUARD, FRONT CHIP	89
-	1	1	1	1	-	-	4088040	SF APPL INST 408-8040	72
-	1	1	1	1	-	-	217238-1	GENERAL INSTRUCTION PKG	71
-	1	1	1	1	-	-	461264-5	PLATE, IDENTIFICATION	67
-	2	2	2	2	-	-	21017-2	SCREW, DRIVE	66
-	1	1	1	1	-	-	21009-2	SCR, SET, SELF LOCKING 1/4-20 X .250	63
-	1	1	1	1	-	-	22733-8	SCR, BHSC, SELF-LOCKING, 8-32 X .375	60
-	1	1	1	1	-	-	2-22603-0	SCR, HEX HD CAP 8-32 X .312	59
-	1	1	1	1	-	-	1-21003-9	SCR, FLT SKT HD CAP 6-32 X .375	57
-	1	1	1	1	-	-	458537-2	PAWL, FEED	56
-	4	4	4	4	-	-	2-21002-2	SCR, BTN SKT HD CAP 8-32 X .500	54
-	2	2	2	2	-	-	2-21000-8	SCR, SKT HD CAP 8-32 X .625	53
-	1	1	1	1	-	-	21018-5	NUT, HEX, REG 6-32	52
-	1	1	1	1	-	-	811242-2	BUMPER, HOLD DOWN	51
-	1	1	1	1	-	-	690753-1	SPACER, TONKER	50
-	-	-	-	-	..	..	690602-6	CAM, PRE FEED, 1 5/8	49
-	-	-	-	-	..	..	690602-5	CAM, PRE FEED, 1 1/8	48
-	1	-	-	-	-	-	690501-4	CAM, POST-FEED 1 5/8	47
-	1	1	1	1	-	-	459456-1	APPL. BASIC SUB ASSY (SIDE WISE MQCA)	46
-	1	1	1	1	-	-	690191-1	PLUG,NYLON	45
-	1	1	1	1	-	-	455673-1	RAM, SIDE FEED	44
-	1	1	1	1	-	-	7-21002-9	SCR, BTN SKT HD CAP 5/16-24 X 1.00	41
-	1	1	1	1	-	-	690125-1	SHIM SUB-ASSY	39
-	1	1	1	1	-	-	469367-9	SHIM	38
-	1	1	1	1	-	-	879103-3	FINE ADJUST HEAD ASSEMBLY	37
-	1	1	1	1	-	-	2-690786-3	TERMINAL SUPPORT	34
-	2	2	2	2	-	-	2-21002-4	SCR, BTN SKT HD CAP 8-32 X .750	33
-	1	1	1	1	-	-	21024-5	WASHER, SPRG LOCK, REG NO 10	32
-	1	1	1	1	-	-	3-21000-4	SCR, SKT HD CAP 10-32 X .375	31
-	1	1	1	1	-	-	1320908-6	SPACER, STRIP GUIDE	30
-	1	1	1	1	-	-	1633091-1	ASSEMBLY, STRIP GUIDE	29
-	1	1	1	1	-	-	1-455888-0	SPACER, CRIMPER	28
-	1	1	1	1	-	-	1320928-1	PLATE, STRIP GUIDE	24
-	1	-	-	-	-	-	690472-2	STRIPPER	22
-	1	1	1	1	-	-	2-21000-7	SCR, SKT HD CAP 8-32 X .500	21
-	4	4	4	4	-	-	21024-4	WASHER, SPRG LOCK, REG NO 8	20
-	-	-	-	-	-	-	691353-1	STRIPPER	19
△	-	-	-	-	-	-	679625-2	SHEAR HOLDER, FRONT (NO CUT)	13
△	-	1	1	1	-	-	3-22280-3	SPRING, COMPRESSION	12
△	-	1	1	1	-	-	690461-2	STOP, SHEAR	11
△	-	-	-	-	-	-	1-690459-0	SHEAR HOLDER, FRONT	10
△	-	1	1	1	-	-	318707-2	FLOATING SHEAR, FRONT	9
△	1	1	1	1	-	-	1633767-2	ANVIL, COMBINATION	8
-	1	1	1	1	-	-	240641-5	SPACER	7
-	-	-	-	-	..	..	-	-	6
-	1	1	1	1	-	-	318701-1	DEPRESSOR, SHEAR	5
-	1	1	1	1	-	-	238011-2	BLOCK, CRIMPER SPACER	4
△	1	1	1	1	-	-	456135-6	CRIMPER, INSULATION O PREMIUM	3
△	-	1	1	1	-	-	455888-9	SPACER, CRIMPER	2
△	1	1	1	1	-	-	5-1633305-7	CRIMPER, WIRE PREMIUM	1
-	77	-6	-3	-2	-1	U/M	PART NO	DESCRIPTION	ITEM NO

THIS DRAWING IS A CUSTOMER DRAWING. IT IS THE PROPERTY OF TYCO ELECTRONICS CORPORATION. IT IS TO BE USED FOR THE CUSTOMER'S EXCLUSIVE USE. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. WITHOUT THE WRITTEN PERMISSION OF TYCO ELECTRONICS CORPORATION. THIS DRAWING IS UNPUBLISHED.		DWN B. HIGMAN	13APR2009	Tyco Electronics Harrisburg, PA 17105-3608		
		CHK T. ELBIN	13APR2009			NAME
		APVD N. DEMING	13APR2009			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		FINE ADJUST SIDE FEED HDM APPLICATOR -		
		9 PLC ±.01 2 PLC ±0.01 3 PLC ±0.001 4 PLC ±0.0001 ANGLES ±.01		SIZE CAGE CODE DRAWING NO		
MATERIAL		FINISH		RESTRICTED TO		
-		-		-		
CUSTOMER DRAWING		WEIGHT		A 00779 C=1855502		
		SCALE		3:5		
		SHEET		1 OF 1		
		REV		A		

CUSTOMER VIEWABLE ASSEMBLY

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9