

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0522713079](#)
Status: **Active**
Overview:
Description: 1.00mm (.039") Pitch FFC/FPC Connector, Right Angle, SMT, ZIF, Bottom Contact Style, 30 Circuits, Lead-free, High Barrier Packaging

Agency Certification

CSA LR19980
UL E29179

General

Product Family FFC/FPC Connectors
Series 52271
Overview ffc_fpc_smt
Product Name N/A

Physical

Circuits (Loaded) 30
Color - Resin Natural
Contact Position Bottom
Durability (mating cycles max) 30
Entry Angle 90° Angle
Flammability 94V-0
Mated Height (in) 0.118 In
Mated Height (mm) 3.00 mm
Material - Metal Phosphor Bronze
Material - Plating Mating Tin-Bismuth
Material - Plating Termination Tin-Bismuth
Material - Resin Nylon
Number of Rows 1
Orientation Right Angle
PCB Locator No
PCB Retention Yes
Packaging Type Embossed Tape on Reel
Pitch - Mating Interface (in) 0.039 In
Pitch - Mating Interface (mm) 1.00 mm
Polarized to PCB Yes
Stackable No
Temperature Range - Operating -40°C to +85°C
Termination Interface: Style Surface Mount
Wire/Cable Type FFC/FPC

Electrical

Current - Maximum per Contact 0.5A
Voltage - Maximum 50V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Application Specification AS-52271-001
Packaging Specification SPK-52271-001, SPK-52271-002
Product Specification PS-52271-053, RPS-52271-066, RPS-52271-067, RPS-52271-068, RPS-52271-069, RPS-52271-070, RPS-52271-072, RPS-52271-073, RPS-52271-075, RPS-52271-080, RPS-52271-085, RPS-52271-087, RPS-52271-091
Sales Drawing SD-52271-036, SD-52271-037

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Contains SVHC: No
Halogen-Free
Status
Not Halogen-Free

China RoHS



Need more information on product environmental compliance?


Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.


Search Parts in this Series
[52271Series](#)

This document was generated on 06/04/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

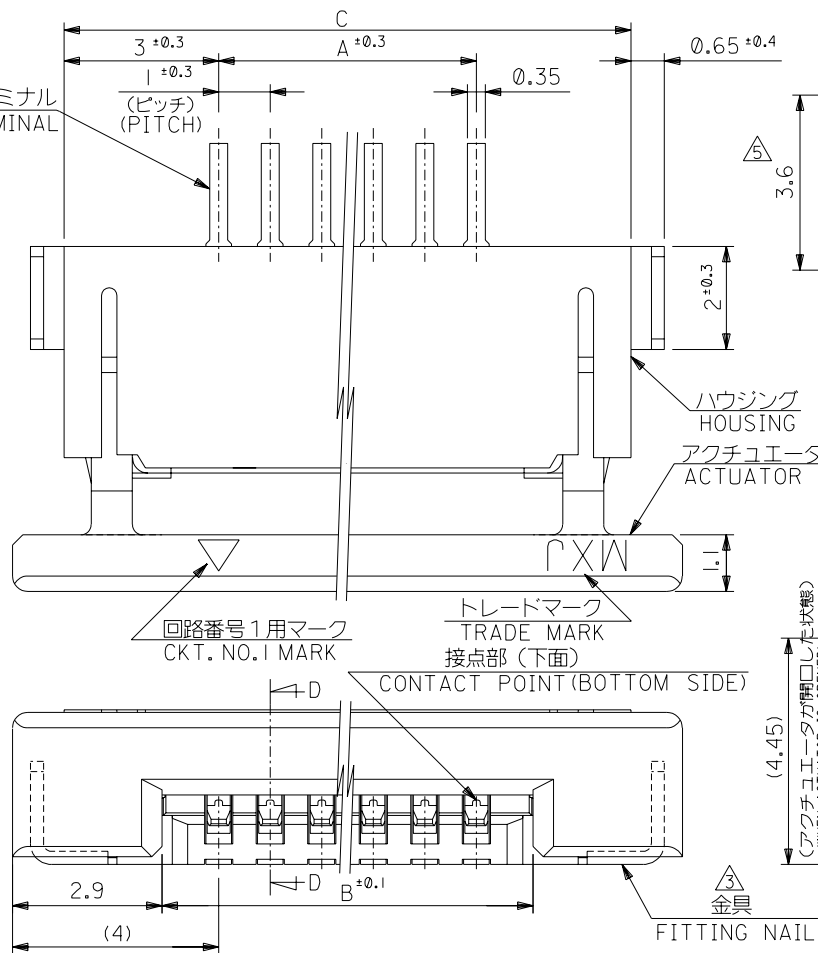ターミナル
TERMINALハウジング
HOUSING
アクチュエータ
ACTUATOR回路番号1用マーク
CKT. NO.1 MARKトレードマーク
TRADE MARK
接点部 (下面)

CONTACT POINT (BOTTOM SIDE)

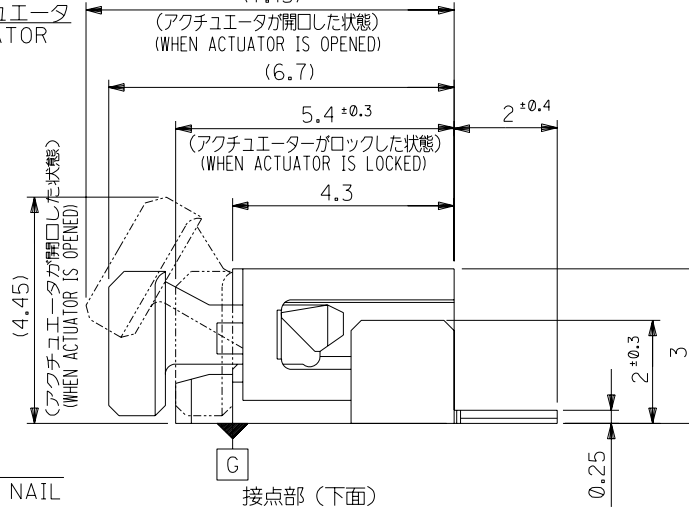金具
FITTING NAIL適合FPC推奨寸法
RECOMMENDED APPLICABLE
FPC LAYOUT
(7.15)



CONTACT POINT (BOTTOM SIDE)

SECT.D-D

角度 ANGLE	±3°					
30°以上 OVER	±0.3	B	変更 REVISED	(J2004-3551)	H.K.	04/04/02
10°以上 30°未満 OVER UNDER	±0.25	A	変更 REVISED	(J2004-3371)	H.K.	04/03/29
10°未満 UNDER	±0.2	0	新規作成 RELEASED	(J2004-3059)	H.K.	04/03/12
一般公差 GENERAL TOLERANCES		記号 LTR	変更内容 REVISION RECORD	DR.	日付 CHK.	DATE

材料
MATERIAL
注記参照
SEE NOTES仕上げ
FINISH
注記参照
SEE NOTES適用電線範囲
WIRE RANGE
被覆外径
INS. RANGEDRAWN BY 04/03/12
H.KAWABATA
CHK'D BY 04/03/12
K.TOJOAPP'D BY 04/03/12
M.SASAO
尺度
SCALEmolex MOLEX-JAPAN CO.,LTD.
日本モレックス株式会社REVISE ONLY ON CAD SYSTEM
TITLE 名称
1.0 FPC CONN. Z.I.F. SMT
(BOTTOM CONTACT)

-LEAD FREE-

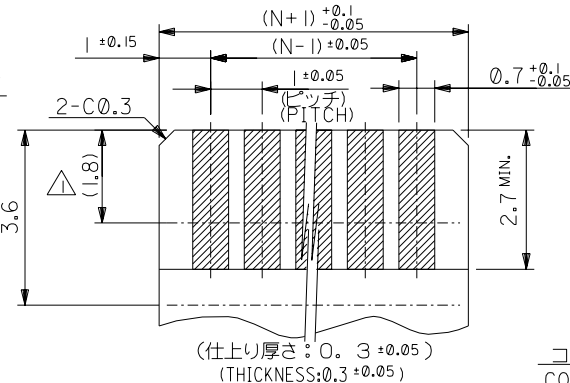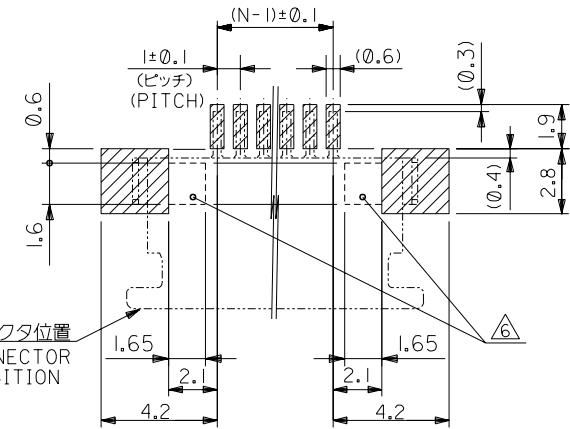DWG. NO. (SHEET 1 OF 2) REV
SD-52271-036 B(仕上り厚さ: 0.3 ±0.05)
(THICKNESS: 0.3 ±0.05)コネクタ位置
CONNECTOR
POSITIONパターン推奨寸法 (参考)
RECOMMENDED PATTERN DIM.(REF.)

35	31.2	29	52271-3019	30
34	30.2	28	-2919	29
33	29.2	27	-2819	28
32	28.2	26	-2719	27
31	27.2	25	-2619	26
30	26.2	24	-2519	25
29	25.2	23	-2419	24
28	24.2	22	-2319	23
27	23.2	21	-2219	22
26	22.2	20	-2119	21
25	21.2	19	-2019	20
24	20.2	18	-1919	19
23	19.2	17	-1819	18
22	18.2	16	-1719	17
21	17.2	15	-1619	16
20	16.2	14	-1519	15
19	15.2	13	-1419	14
18	14.2	12	-1319	13
17	13.2	11	-1219	12
16	12.2	10	-1119	11
15	11.2	9	-1019	10
14	10.2	8	-0919	9
13	9.2	7	-0819	8
12	8.2	6	-0719	7
11	7.2	5	-0619	6
10	6.2	4	-0519	5
9	5.2	3	52271-0419	4

52271-**-19
MODEL NO. C B A MATERIAL NO. 極数 CKT.


E

D

ALL DIMENSIONS IN METRIC DO NOT SCALE DRAWING

B

A

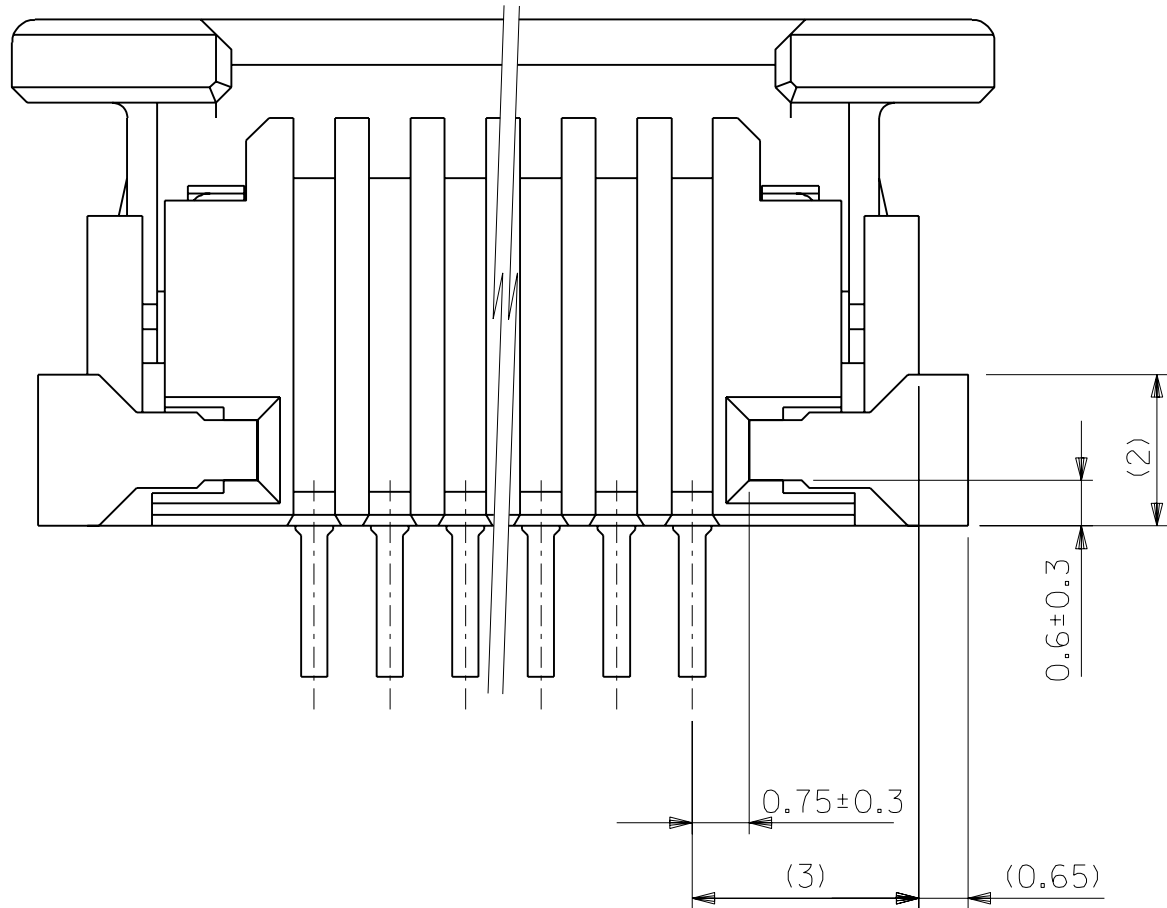

下面図

注記 NOTES

- ① 接点部までの嵌合長さ。
LENGTH TO CONTACT POINT.
2. 使用材料 MATERIAL
ハウジング : 46ナイロン, UL94V-0
HOUSING : 46NYLON, UL94V-0
アクチュエータ : PPS, UL94V-0
ACTUATOR : PPS, UL94V-0
ターミナル : リン青銅 (t=0.25)
TERMINAL : PHOS-BRO.(t=0.25)
メッキ : 錫ビスマスメッキ 1.0マイクロメートル以上
PLATING : TIN-BISMUTH 1.0 MICROMETER MINIMUM
: ニッケル下地 1.0マイクロメートル以上
PLATING : NICKEL(UNDER PLATING)1.0 MICROMETER MINIMUM
金具 : 銅合金 (t=0.25)
FITTING NAIL : COPPER ALLOY (t=0.25)
メッキ : 錫メッキ 1.0マイクロメートル以上
PLATING : TIN 1.0 MICROMETER MINIMUM
: ニッケル下地 1.0マイクロメートル以上
PLATING : NICKEL(UNDER PLATING) 1.0 MICROMETER MINIMUM
- ③ パターンはくり止め用金具
FITTING NAIL FOR PREVENTION OF PEELING OF P.C.B.PATTERN.
4. エンボステーブル梱包時は、アクチュエータがロックした状態とする。
WHEN CONNECTOR IS SHIPED, ACTUATOR SHOULD BE LOCKED.
- ⑤ FPC挿入深さ。
INSERTION DEPTH OF FPC
- ⑥ パターン書き込み禁止エリア。
NO FOOT PRINT AREA.
7. 本製品は52271-**-17の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52271-**-17.

FPCについて：
打抜き方向は導体側から補強板側を推奨致します。
補強フィルム材質はポリイミドを推奨致します。
接着剤は熱硬化接着剤を推奨致します。

ABOUT FPC:
RECOMMENDED PUNCHER DIRECTION :FROM CONDUCTOR SIDE TO STIFFENER BOARD SIDE.
RECOMMENDED MATERIAL :
STIFFENER FILM :POLYIMIDE
BONDING AGENT :THERMOSETTING BONDING AGENT


				MODEL NO.		52271-**-19	
				材料 MATERIAL	注記参照 SEE NOTES	molex MOLEX-JAPAN CO.,LTD. 日本モレックス株式会社	
				仕上げ FINISH	注記参照 SEE NOTES		
				適用電線範囲 WIRE RANGE	—//—	REVISE ONLY ON CAD SYSTEM TITLE 名称 1.0 FPC CONN. Z.I.F. SMT (BOTTON CONTACT) -LEAD FREE-	
				被覆外径 INS. RANGE	—//—		
				DRAWN BY '04/03/12 H.KAWABATA	CHK'D BY '04/03/12 K.TOJO	DWG. NO. (SHEET 2 OF 2) REV SD-52271-036 B	
				APP'D BY '04/03/12 M.SASAO	尺度 SCALE —//—		
角度 ANGLE	±3°			記号 LTR	変更内容 REVISION RECORD	DR. CHK.	日付 DATE
30 以上 OVER	±0.3	B	変更 REVISED (J2004-355)	H.K	K.T	04/04/02	
10 以上 30 未満 OVER UNDER	±0.25	A	変更 REVISED (J2004-337)	H.K	K.T	04/03/25	
10 未満 UNDER	±0.2	O	新規作成 RELEASED (J2004-3059)	H.K	K.T	04/03/12	
一般公差 GENERAL TOLERANCES							

NOTES

1. 製品番号 52271-**-19 の梱包状態はアクチュエータがロックした状態とする。
 詳細寸法については 図面 SD-52271-036 を参照下さい。
 IN THE PACKAGE, ACTUATOR OF PART NO. 52271-**-19 SHOULD BE LOCKED
 RE DETAILED DIMENSIONS, SEE SD-52271-036.

2. 梱包数量: 1000個/リール
 NUMBER OF CONNECTORS: 1000 PCS/REEL

3. リードテープ長さ LEAD TAPE LENGTH

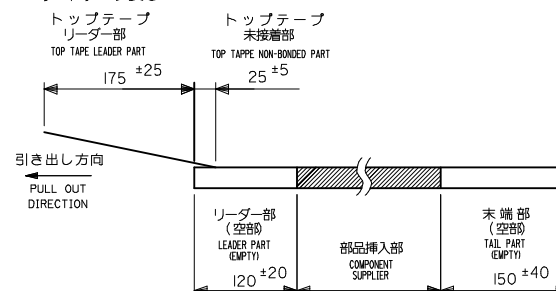

4. トップテープの剥離強度: 0.1~1.3N {10~130gf} (剥離方向は下図参照)
 尚、本規格値は、出荷時に適用。(但し、輸送時に剥離が発生しない事。)

PEELING OFF FORCE OF TOP TAPE: 0.1~1.3N {10~130gf}
 (PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)

THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT

PEEL OFF SHOULD NOT BE ALLOWED, DURING TRANSPORTATION



5. 材料 (MATERIAL)

キャリアテープ (CARRIER TAPE): ポリプロピレン (POLYPROPYLENE)




トップテープ (TOP TAPE): PET, PE, PEF

リール (REEL): ポリスチレン (PS) <リサイクル材を含む>

POLYSTYRENE (PS) <RECYCLE MATERIAL CONTAINED>

6. 本製品は52271-**-90の鉛フリー品である。
 THIS PRODUCT IS LEAD FREE OF 52271-**-90.

7. 本製品は乾燥剤入り、ハイバリア梱包仕様である。
 THIS PRODUCT IS HIGH BARRIER PACKAGE
 WITH DESICCANT.

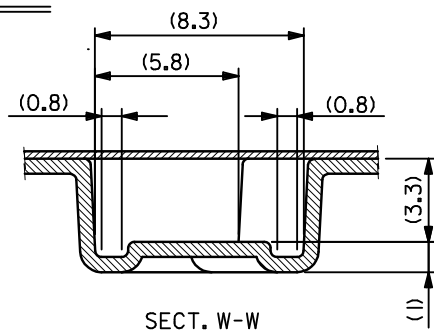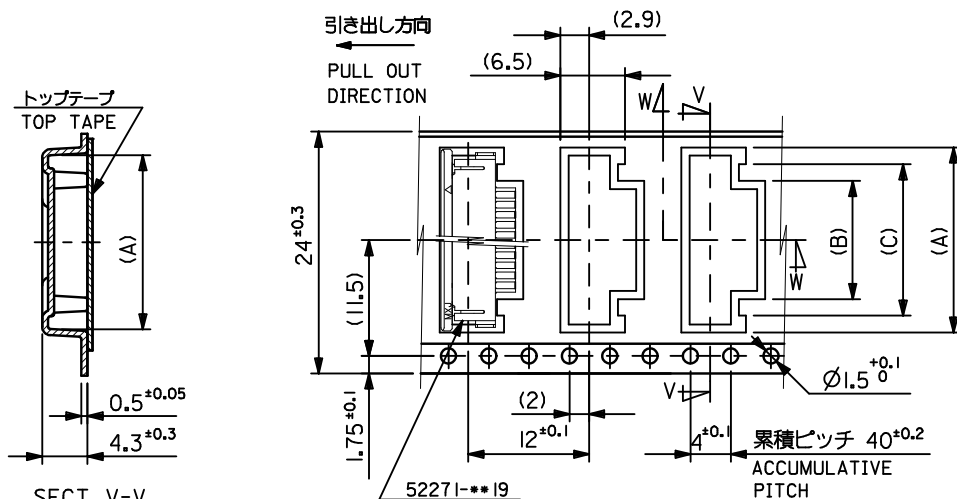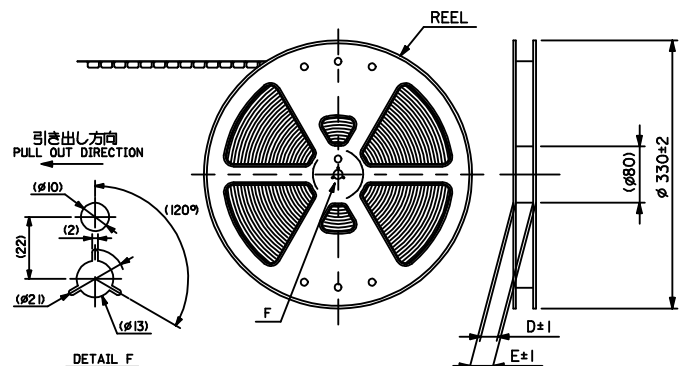

52271-**-19	24	29.4	25.4	15	11.4	18.3	52271-1179	11
MODEL NO.	CARRIER TAPE WIDTH	E	D	14	10.4	17.3	-1079	10
				13	9.4	16.3	-0979	9
				12	8.4	15.3	-0879	8
				11	7.4	14.3	-0779	7
				10	6.4	13.3	-0679	6
				9	5.4	12.3	-0579	5
				8	4.4	11.3	52271-0479	4

REVISED		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
EC NO. J2009-2061		10 UNDER		MM ONLY		---		METRIC		◎ □	
DRWN:TKN 2009/05/20		10 OVER 30 UNDER		DRAWN BY		DATE		TITLE		EMBOSSED TAPE PACKAGE	
CHKD:HMATSUMOTO 2009/05/21		30 OVER		CHECKED BY		DATE		H. KAWABATA 2004/03/12		FOR 52271-**-19	
APPR:NUKITA 2009/05/21		ANGULAR		APPROVED BY		DATE		K. TOJO 2004/03/12		-LEAD FREE-	
REV		DRAFT WHERE APPLICABLE		M. SASAO 2004/03/12		DATE		MATERIAL NO.		MOLEX INCORPORATED	
A		MUST REMAIN WITHIN DIMENSIONS		SIZE		DOCUMENT NO.		SD-52271-037		SHEET NO.	
				A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				1 OF 3	

F

E

D

C

B

A

F






E

D

C


B

A

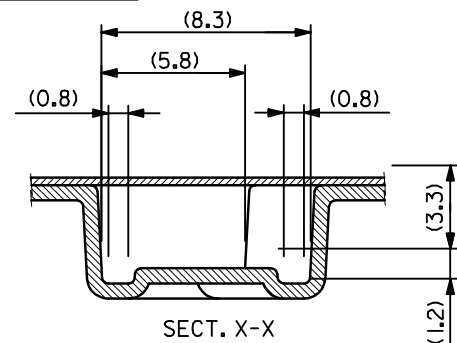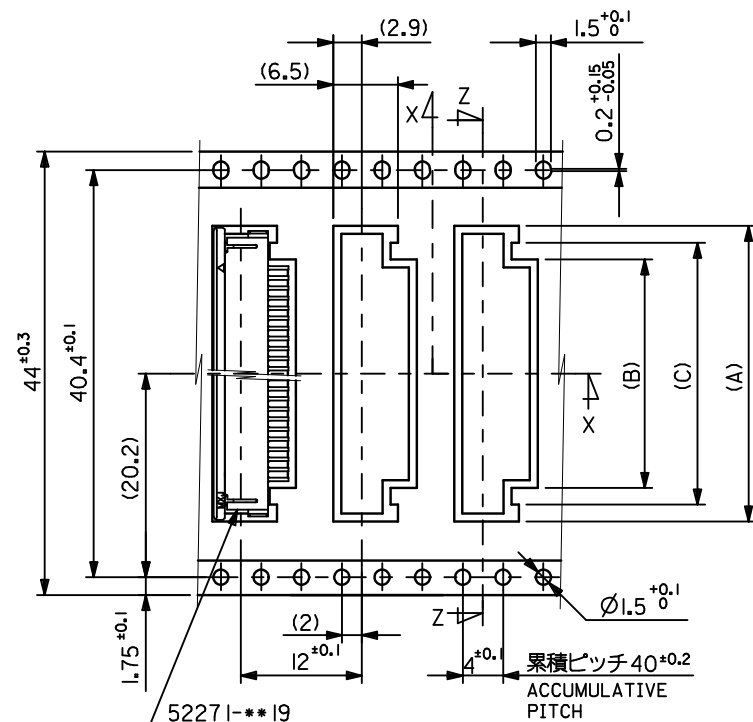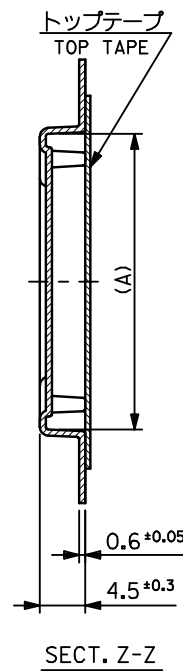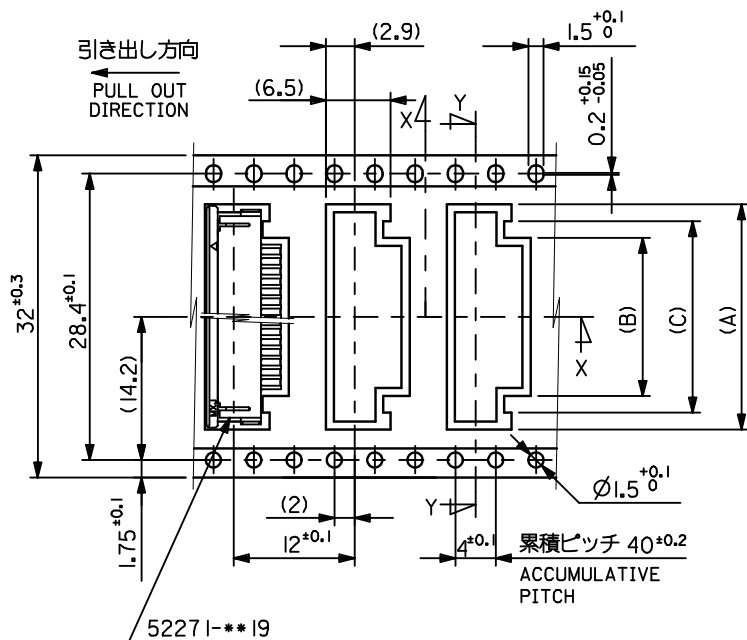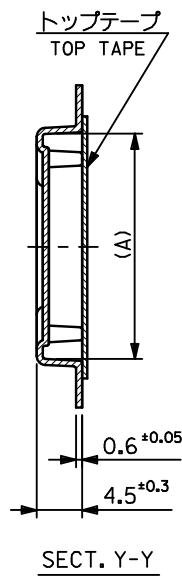

44	49.4	45.4	31	27.4	34.35	52271-2779	27
			30	26.4	33.35	-2679	26
			29	25.4	32.35	-2579	25
			28	24.4	31.35	-2479	24
			27	23.4	30.35	-2379	23
			26	22.4	29.35	-2279	22
			25	21.4	28.35	-2179	21
			24	20.4	27.35	-2079	20
			23	19.4	26.35	-1979	19
			22	18.4	25.35	-1879	18
			21	17.4	24.35	-1779	17
			20	16.4	23.35	-1679	16
			19	15.4	22.35	-1579	15
			18	14.4	21.35	-1479	14

32	37.4	33.4	17	13.4	20.35	-1379	13
16	12.4	19.35	52271-1279	12			
キャリアテープ幅 CARRIER TAPE WIDTH	E	D	(C)	(B)	(A)	MATERIAL NO.	電 装 CKT.

REVISED EC NO: J2009-2061 2009/05/20 DRWN:TKON CHKD:HMATSUMOTO 2009/05/21 APPR:NUKITA 2009/05/21 REV	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER		DRAWN BY H.KAWABATA	DATE 2004/03/12	TITLE EMBOSSD TAPE PACKAGE FOR 52271-**19 -LEAD FREE-				
		10 OVER 30 UNDER		CHECKED BY K. TOJO	DATE 2004/03/12					
		30 OVER		APPROVED BY M. SASAO	DATE 2004/03/12	 MOLEX INCORPORATED				
		ANGULAR		MATERIAL NO.			DOCUMENT NO.	SHEET NO.		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-52271-037			2 OF 3	
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F



E

D

C

B

A

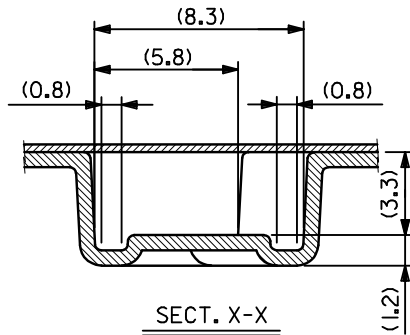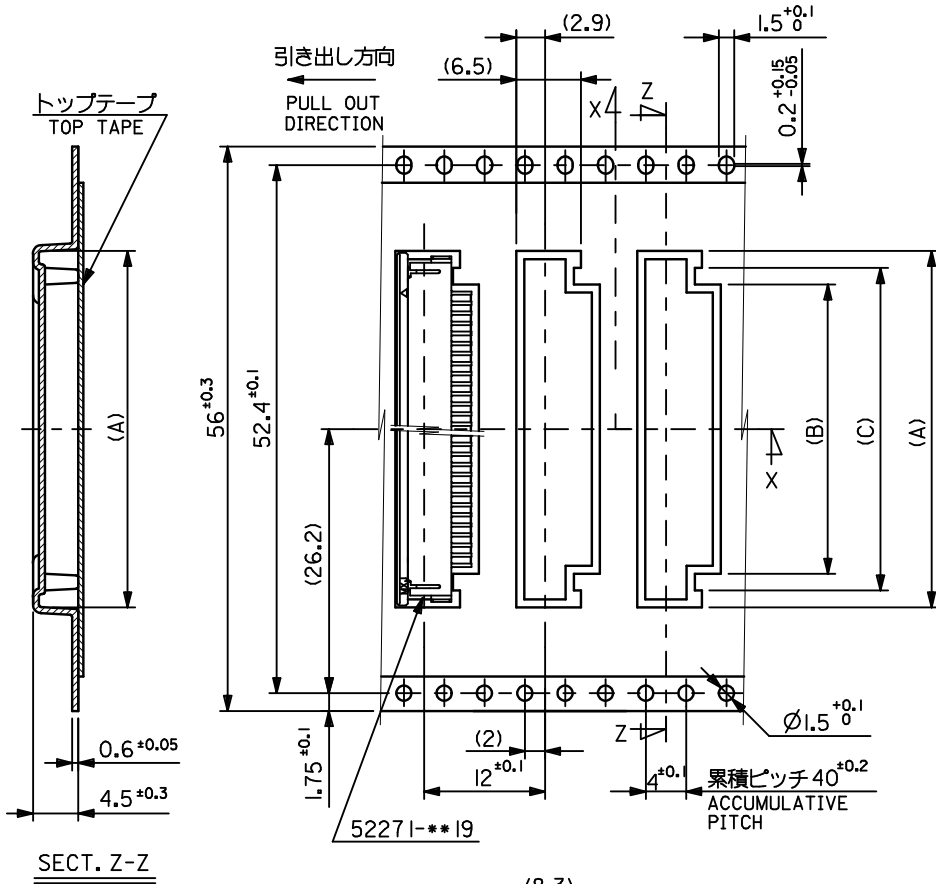

56	61.4	57.4	34	30.4	37.35	5227I-3079	30
			33	29.4	36.35	5227I-2979	29
			32	28.4	35.35	5227I-2879	28
キャリアテープ幅 CARRIER TAPE WIDTH	E	D	(C)	(B)	(A)	MATERIAL NO.	標 数 CKT.

tb_frame_A3_J_ME_S
Rev. E 2006/04/15

9

8

7

6

5

4

3

2

EN-02JA(021)

REVISED
EC NO: J2009-2061
2009/05/20
DRWN:TKN
CH'KD:HMATSUMOTO
2009/05/21
APPR:NUKITA
2009/05/21
REV DESCRIPTION

GENERAL TOLERANCES
(UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3

ANGULAR ±3°
DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM ONLY

DRAWN BY	DATE
H.KAWABATA	2004/03/12
CHECKED BY	DATE
K.TOJO	2004/03/12
APPROVED BY	DATE
M.SASAO	2004/03/12

MATERIAL NO.

SEE TABLE

SIZE
A3

SCALE

DESIGN UNITS
METRIC

THIRD ANGLE
PROJECTION

EMBOSSD TAPE PAKEGE
FOR 5227I-***19
-LEAD FREE-

MOLEX INCORPORATED

SD-5227I-037

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

MODEL NO. 5227I-***79

SHEET NO.

3 OF 3

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9