


Advantages of the 841 Current Sensing Relay

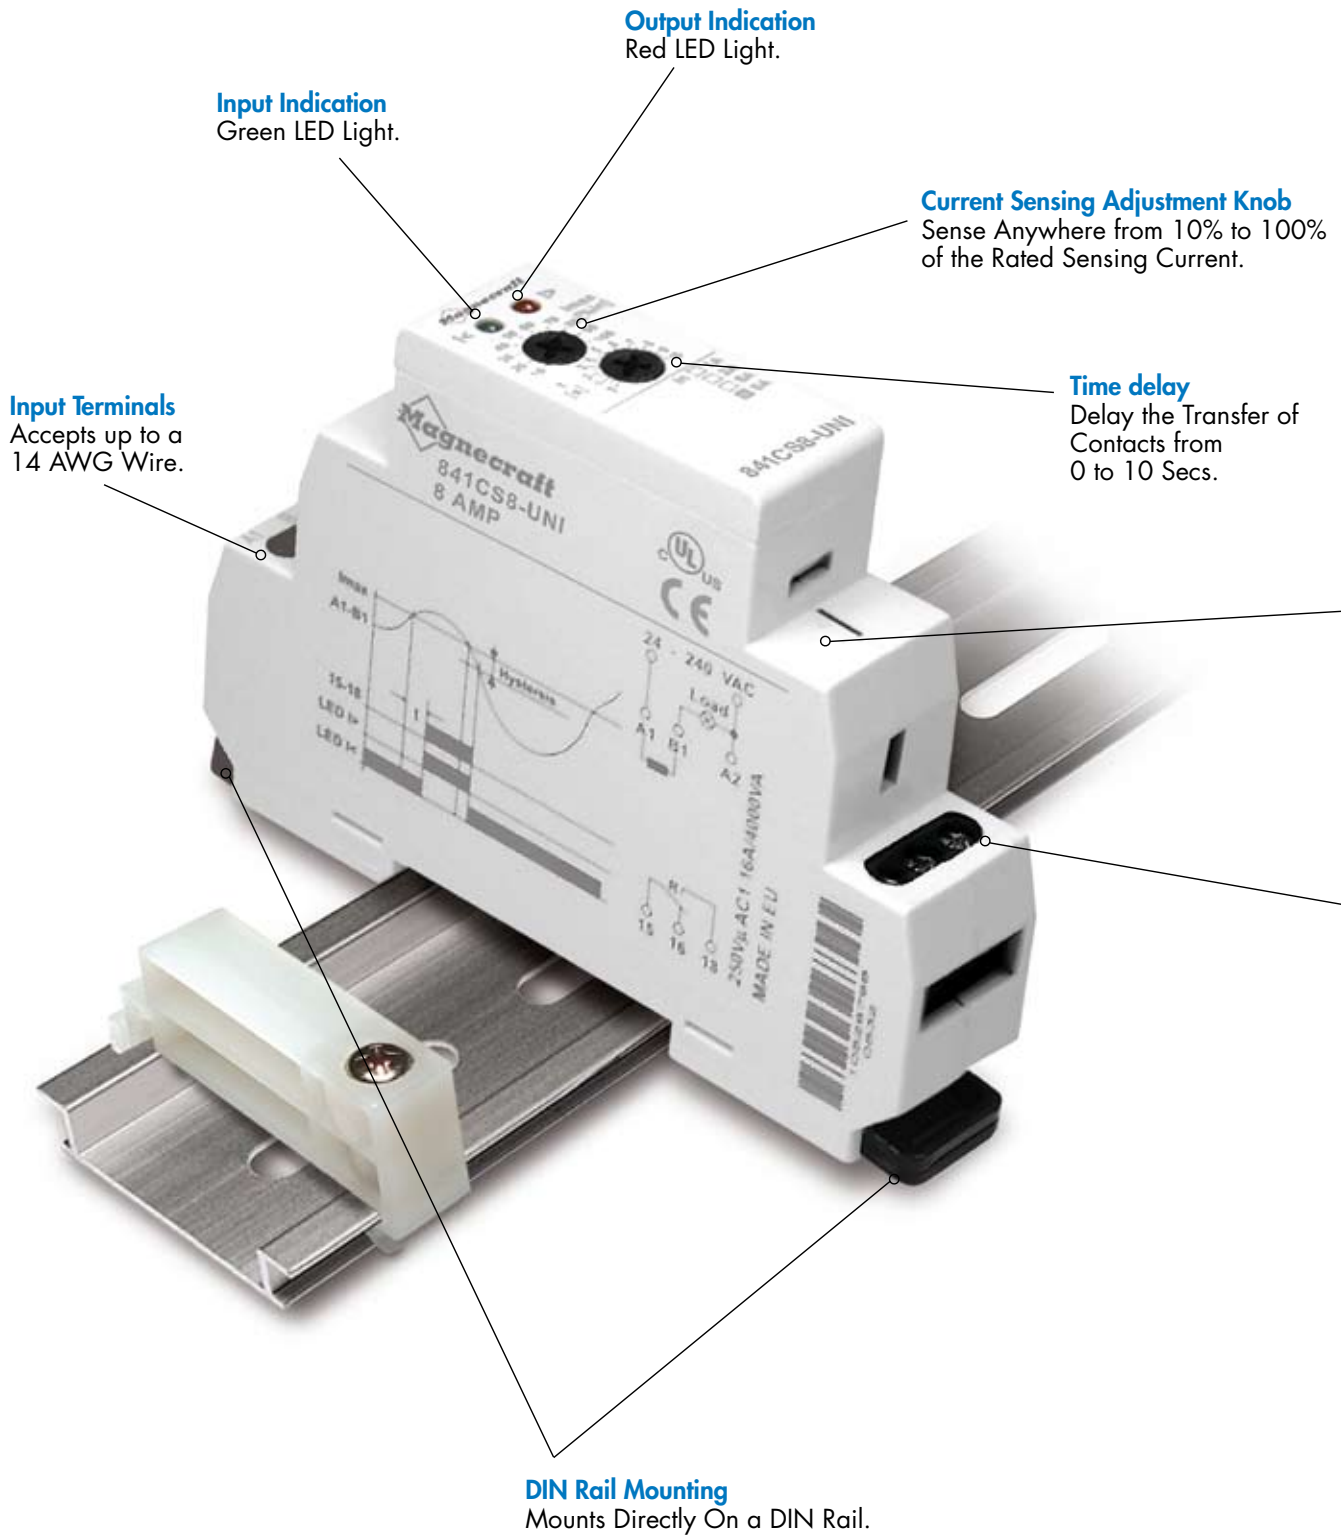

The 841 Current Sensor Series is a complete current sensing solution in one modular package which mounts directly to a DIN rail. This product allows the user to monitor the current of one circuit (1 to 8 amps) and switch another circuit in case of an over current or under current condition. The built in time delay feature allows the user to accurately switch the output anytime between 0 to 10 seconds after the preset current monitoring condition is violated. Also, the 841 has the capability to extend the sensing range up to 600 A through the use of current transformers.

Solid State Circuitry

Used for Sensing and Timing Control.

Output Terminals

Accepts up to a 14 AWG wire.




Optional Panel Adapter (16-788C1)

See Section 3 p.18

- The variable trip point feature allows the user to accurately sense over/under loads.
- Offers a “one stop solution” for your power management system.
- Two LED status indicators; indicate status at a glance.
- The Green LED is on when power is applied to the input terminals. The Red LED blinks during time-out, and is ON when the output is generated.
- Color and appearance designed for high visibility in all environments.
- The wide input voltage range of 24 to 240 AC enables the device to work with all popular AC voltages.
- Only 17.5 mm wide making it ideal for tight spaces.
- Engineering availability allows for customized relay solutions.

841 Current Sensing Relay/SPDT 15 Amp Rating

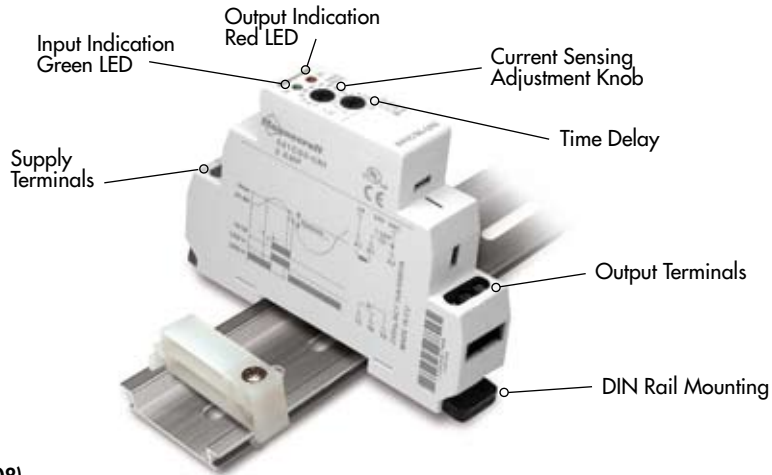

General Specifications (@ 25°C) (UL 508)

| Output Characteristics | | Units | 841CS1-UNI | 841CS2-UNI | 841CS5-UNI | 841CS8-UNI |
|--|---|-----------------------------------|------------------|------------------|------------------|------------------|
| Number and type of Contacts | | | SPDT | SPDT | SPDT | SPDT |
| Contact Material | | | Silver Alloy | Silver Alloy | Silver Alloy | Silver Alloy |
| Current rating | @ 240 VAC, 24 VDC | A | 15 | 15 | 15 | 15 |
| Switching voltage | | V | 240 AC, 50/60 Hz | 240 AC, 50/60 Hz | 240 AC, 50/60 Hz | 240 AC, 50/60 Hz |
| | | V | 24 DC | 24 DC | 24 DC | 24 DC |
| | | HP | 1/2 @ 120VAC | 1/2 @ 120VAC | 1/2 @ 120VAC | 1/2 @ 120VAC |
| | | HP | 1 @ 240 VAC | 1 @ 240 VAC | 1 @ 240 VAC | 1 @ 240 VAC |
| | | Pilot Duty | B300 | B300 | B300 | B300 |
| Minimum Switching Requirement | | mA | 100 | 100 | 100 | 100 |
| Indication | LED | Blinks = Timing On = Energized | Red | Red | Red | Red |
| Input Characteristics | | | | | | |
| Voltage Range | | V | 24...240 AC | 24...240 AC | 24...240 AC | 24...240 AC |
| Maximum consumption | LED | VA | 1.5 | 1.5 | 1.5 | 1.5 |
| Indication | | | Green | Green | Green | Green |
| Sensing Characteristics | | | | | | |
| Sensing Range | | A | 0.1...1 | 0.2...2 | 0.5...5 | 0.8...8 |
| Timing Characteristics | | | | | | |
| Time Scales | | | 1 | 1 | 1 | 1 |
| Time Ranges Available | | sec | 0...10 | 0...10 | 0...10 | 0...10 |
| Tolerance | Mechanical Setting | % | 5 | 5 | 5 | 5 |
| Repeatability | Constant Voltage and Temperature | % | 1 | 1 | 1 | 1 |
| Operate Time | Maximum | ms | 25 | 25 | 25 | 25 |
| Release Time | Maximum | ms | 20 | 20 | 20 | 20 |
| Performance Characteristics | | | | | | |
| Electrical Life | Operations @ Rated Current (Resistive) | | 100,000 | 100,000 | 100,000 | 100,000 |
| Mechanical Life | Unpowered | | 10,000,000 | 10,000,000 | 10,000,000 | 10,000,000 |
| Dielectric strength | Input to Contacts | V | 2500 AC | 2500 AC | 2500 AC | 2500 AC |
| | Between Open Contacts | V | 1000 AC | 1000 AC | 1000 AC | 1000 AC |
| Terminal Wire Capacity | | AWG (mm ²) | 14 (2.1) | 14 (2.1) | 14 (2.1) | 14 (2.1) |
| Terminal Torque (maximum) | | in lb (Nm) | 7.1 (0.8) | 7.1 (0.8) | 7.1 (0.8) | 7.1 (0.8) |
| Environment | | | | | | |
| Product certifications | Standard version | | UL, CE | UL, CE | UL, CE | UL, CE |
| Ambient air temperature around the device | Storage | °C | -30...+70 | -30...+70 | -30...+70 | -30...+70 |
| | Operation | °C | -20...+55 | -20...+55 | -20...+55 | -20...+55 |
| Degree of protection | | | IP 20 | IP 20 | IP 20 | IP 20 |
| Weight | | grams | 60 | 60 | 60 | 60 |



Optional Panel Adapter
(16-788C1)
See Section 3 p.18




Standard Part Numbers

BOLD-FACED PART NUMBERS ARE NORMALLY STOCKED



| Part Number | Input Voltage | Timing Range | Sensing Current Range | Contact Configuration | Rated Load Current |
|-------------------|---------------|--------------|-----------------------|-----------------------|--------------------|
| 841CS1-UNI | 24...240 VAC | 0.1s...10s | 0.1...1A | SPDT | 15 Amps |
| 841CS2-UNI | 24...240 VAC | 0.1s...10s | 0.2...2A | SPDT | 15 Amps |
| 841CS5-UNI | 24...240 VAC | 0.1s...10s | 0.5...5A | SPDT | 15 Amps |
| 841CS8-UNI | 24...240 VAC | 0.1s...10s | 0.8...8A | SPDT | 15 Amps |

Part Number Builder

| Series | Relay Style | Sensing Current | - | Input Voltage |
|------------|---------------------|-----------------|---|--------------------|
| 841 = SPDT | CS = Current Sensor | 1 = 0.1...1 Amp | | UNI = 24...240 VAC |
| | | 2 = 0.2...2 Amp | | |
| | | 5 = 0.5...5 Amp | | |
| | | 8 = 0.8...8 Amp | | |

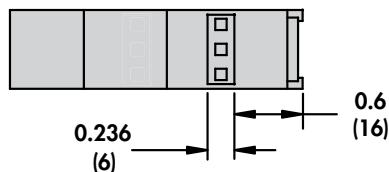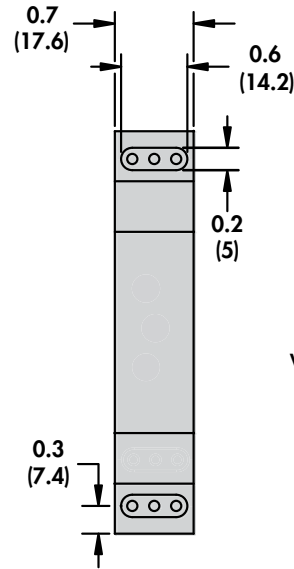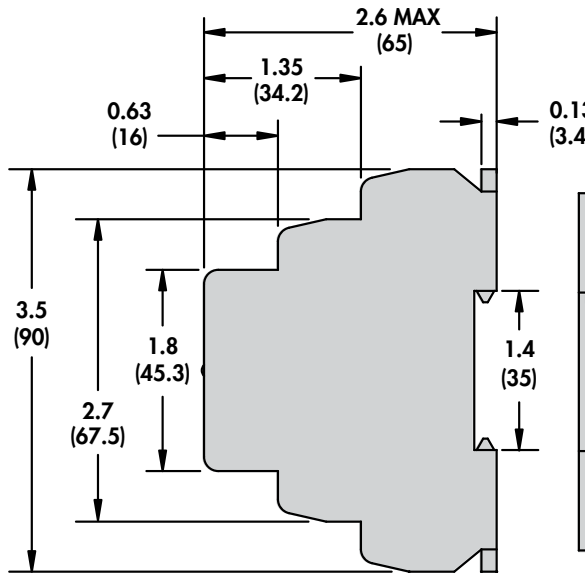

WIRING DIAGRAM

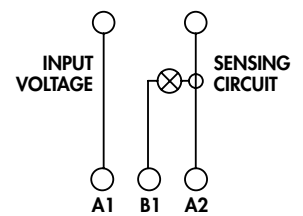

15 - COMMON
16 - NORMALLY CLOSED
18 - NORMALLY OPEN

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9