

IndustrialNet™ Category 6A 600V Patch Cords

specifications

Industrial patch cords shall be constructed of Category 6A, industrial grade, 26 AWG stranded, twisted 4-pair shielded SF/UTP cable with a flame retardant (CMR) thermoplastic elastomer (TPE) jacket. Patch cord cable shall be offered in teal and black colors and lengths for design flexibility. Each patch cord shall be pre-terminated to include Category 6A RJ45 shielded modular plugs on each end, with a black strain relief boot, and wired according to the T568B standard. Each patch cord is designed to support high-flex applications and is rated for 600V panel or on-machine applications when the space is shared with high voltage power cables.



technical information

Electrical/mechanical performance:	Exceeds channel and component requirements of ANSI/TIA-568-C.2 Category 6A and ISO 11801 Class Ea standards at swept frequencies up to 500MHz; meets ODVA Ethernet/IP electrical and mechanical performance requirements
FCC and ANSI compliance:	Meets all applicable ANSI/TIA-968-A requirements; contacts plated with 50 micro-inches of gold for superior performance
IEC compliance:	Meets IEC 60603-7 UL-rated: UL 1863 approved
IP compliance:	Rated IP20
RoHS compliancy status:	Compliant
PoE compliance:	Meets IEEE 802.3af and IEEE 802.3at for PoE+ applications
Other standard compliances:	UL AWM Style 2463 (80°C 600V) Flex Life Test: 1 million cycles at 10x cable diameter; 10 million cycles at 20x cable diameter Torsion Life Test: 3 million cycles, 360°
Temperature rating:	-10°C to 60°C (14°F to 140°F) operating; -40°C to 70°C (-40°F to 158°F) storage
Wiring scheme:	T568B
Cable jacket diameter:	7.4 mm (0.29 in.) nominal
Flame rating:	CMR (UL1685)
Packaging:	1 unit per polyethylene bag, 10 units per carton

key features and benefits

Robust 600V-rated construction:	Allows for patch runs between automation devices in industrial environments; rated for 600V panel or on-machine applications when the space is shared with high voltage power cables; plug contact plated with 50 micro-inches of gold
100% performance tested for wire map, NEXT, and return loss:	Factory testing provides confidence that each patch cord delivers specified performance
Centered de-embedded plug:	Performs in center of ANSI/TIA-568-C.2 component range, ensuring interoperability and optimum performance
Integral pair manager:	Optimizes performance and consistency by reducing untwist at the plug
Flexible stranded cable:	26 AWG stranded copper cable with a nominal diameter of 7.4mm (0.29 in.) allows for high density applications and superior panel cable management
Identification provides for future traceability:	Identification of performance level, length, and quality control number is provided on each cord

applications

IndustrialNet™ Patch Cords provide an ideal solution to support Industrial Ethernet from the Local Area Network (LAN) based support offices to the processing devices on the plant floor. The industrial Ethernet patch cord is a key component to an overall industrial Ethernet application. The patch cord will be the interface that protects the integrity of the Ethernet data transfer from the switch or PLC out to the devices or up to the horizontal plant backbone. The patch cord incorporates a durable oil and UV resistant TPE jacketed cable with modular plugs and is fully shielded for use in high noise (EMI/RFI) environments.

Key applications include:

- 10BASE-T (Ethernet)
- 100BASE-T (Fast Ethernet)
- 1000BASE-T (Gigabit Ethernet)
- Industrial Ethernet
- Ethernet/IP
- Control Panel deployments featuring power source voltages
- Uplinks featuring gigabit data transmission from the control panel to the consolidation point
- High flex applications – Robotic, C-Track

PANDUIT®

SPECIFICATION SHEET

IndustrialNet™ Category 6A Shielded 600 V-Rated Patch Cords

CM/CMX: ^ISTPH6X1M**

IndustrialNet™ Category 6A SF/UTP Copper Cable

CMR/CMX 4-pair: ISFCH6X04B**-UG

IndustrialNet™ Category 6/5e RJ45 Field Terminable Plug

Field terminable plug: ISPS688MFA

IndustrialNet™ M12 X-Code Field Terminable Plug

Field terminable Plug: ISPS6A88MFA

IndustrialNet™ M12 X-Code to RJ45 Panel Mount Adapter

Panel mount adapter: ICAM12DRJS

Mini-Com® Modular Patch Panel

8-port: CDPP8RG

DIN Rail Adapter



1-port: CADIN1IW***

^For other lengths, change the length in the part number, to the desired length (0.3M, 0.6M, 1M, 1.5M, 2M, 2.5M, 3M, 3.5M, 4M, 4.5M, 5M, 7M, 10M, 15M, or 20M)

**To designate color, add suffix TL (Teal) or BL (Black)

***For standard colors other than IG (International Gray), replace suffix with WH (White), IW (Off White), BL (Black) or EI (Electric Ivory).

IndustrialNet™ Category 6A 600V Patch Cords

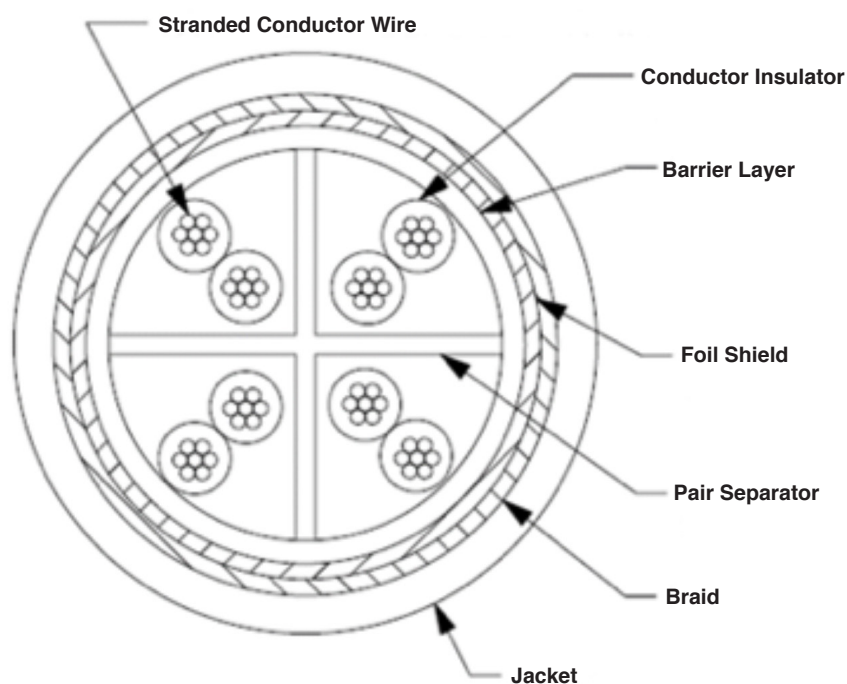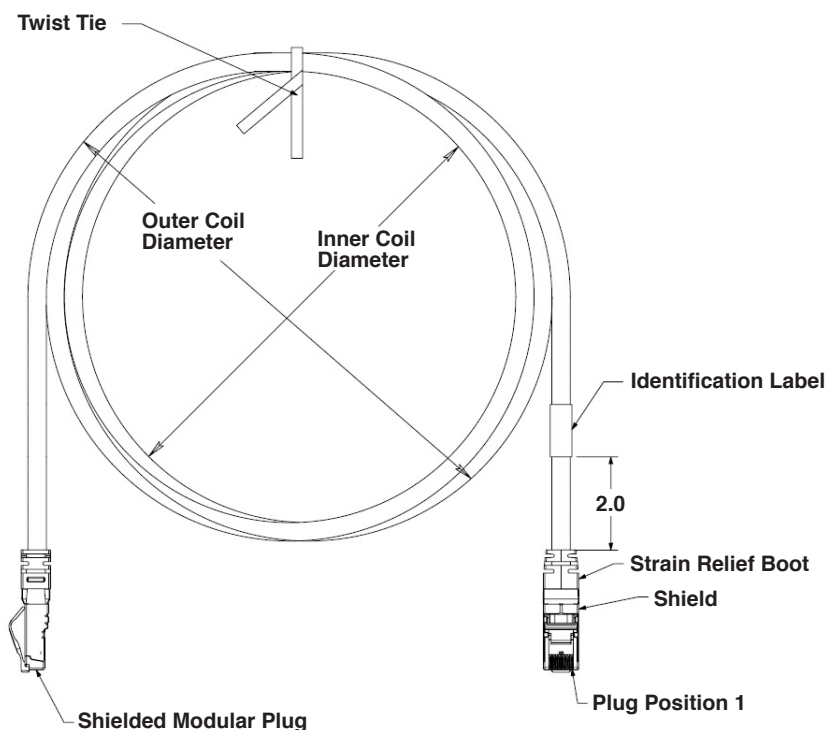

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com/ia

iai@panduit.com

PANDUIT®

©2018 Panduit Corp.
ALL RIGHTS RESERVED.
COSP449--WW-ENG
8/2018

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9