


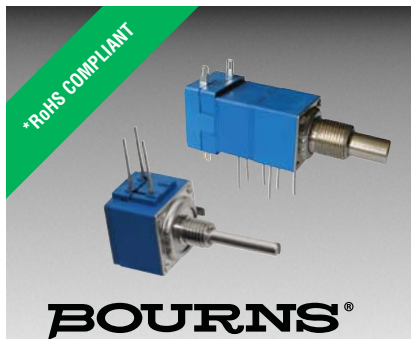

## Features

- Metal shaft and bushing
- Consistent, smooth quality feel
- Up to 4 sections available
- Rotary switch option designed for "on-off" function control
- RoHS compliant\*

**81/82 - 5/8 " Square Single-Turn Panel Control**

**85/86 - 5/8 " Square Single-Turn Panel Control with Rotary Switch**

## Potentiometer Specifications

| Initial Electrical Characteristics <sup>1</sup>                                            | Conductive Plastic Element                                           | Cermet Element                                                    |
|--------------------------------------------------------------------------------------------|----------------------------------------------------------------------|-------------------------------------------------------------------|
| Standard Resistance Range                                                                  | (B & E) 1 K ohms to 1 megohm                                         | (A & H) 100 ohms to 1 megohm                                      |
| Linear Tapers (A, B, E, & H)                                                               | (D, G, S, & T) 1 K ohms to 1 megohm                                  | (C & F) 1 K ohms to 1 megohm                                      |
| Audio Tapers (C, D, F, G, S, & T)                                                          |                                                                      |                                                                   |
| Total Resistance Tolerance                                                                 | ±20 % or 10 %                                                        | ±10 % or 5 %                                                      |
| Independent Linearity                                                                      | ±5 %                                                                 | ±5 %                                                              |
| Absolute Minimum Resistance                                                                | 2 ohms maximum                                                       | 2 ohms maximum                                                    |
| Effective Electrical Angle                                                                 | (Linear tapers) 240 ° ± 5 °<br>(Audio tapers) 225 ° ± 5 °            | (Linear tapers) 240 ° ± 6 °<br>(Audio tapers) 225 ° ± 6 °         |
| Contact Resistance Variation                                                               | ±1 %                                                                 | ±1 % or 3 ohms (whichever is greater)                             |
| Dielectric Withstanding Voltage (MIL-STD-202, Method 301)                                  |                                                                      |                                                                   |
| Sea Level                                                                                  | 1,500 VAC minimum                                                    | 1,500 VAC minimum                                                 |
| 70,000 Feet                                                                                | 500 VAC minimum                                                      | 500 VAC minimum                                                   |
| Insulation Resistance (500 VDC)                                                            | 1,000 megohms minimum                                                | 1,000 megohms minimum                                             |
| Power Rating At 70 °C (Voltage Limited By Power Dissipation or 350 VAC, Whichever Is Less) |                                                                      |                                                                   |
| +70 °C Single Section Assembly                                                             | (Linear tapers) 1 watt<br>(Audio tapers) 0.5 watt                    | (Linear tapers) 2 watts<br>(Audio tapers) 1 watt                  |
| +70 °C Multiple Section Assembly                                                           | (Linear tapers) 0.5 watt/section<br>(Audio tapers) 0.25 watt/section | (Linear tapers) 1 watt/section<br>(Audio tapers) 0.5 watt/section |
| +125 °C                                                                                    | 0 watt                                                               | 0 watt                                                            |
| Theoretical Resolution                                                                     | Essentially infinite                                                 | Essentially infinite                                              |

## Environmental Characteristics<sup>1</sup>

|                                                            |                                                                                                   |                               |
|------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-------------------------------|
| Operating Temperature Range                                | -40 °C to +125 °C                                                                                 | -40 °C to +125 °C             |
| Storage Temperature Range                                  | -55 °C to +125 °C                                                                                 | -55 °C to +125 °C             |
| Temperature Coefficient Over Storage Temperature Range     | ±1,000 ppm/°C                                                                                     | ±150 ppm/°C                   |
| Vibration (Single Section)                                 | 15 G                                                                                              | 15 G                          |
| Total Resistance Shift                                     | ±2 % maximum                                                                                      | ±2 % maximum                  |
| Voltage Ratio Shift                                        | ±5 % maximum                                                                                      | ±5 % maximum                  |
| Shock (Single Section)                                     | 30 G                                                                                              | 30 G                          |
| Total Resistance Shift                                     | ±2 % maximum                                                                                      | ±2 % maximum                  |
| Voltage Ratio Shift                                        | ±5 % maximum                                                                                      | ±5 % maximum                  |
| Load Life                                                  | 1,000 hours                                                                                       | 1,000 hours                   |
| Total Resistance Shift                                     | ±10 % maximum                                                                                     | ±5 % maximum                  |
| Rotational Life (No Load)                                  | 100,000 cycles                                                                                    | 100,000 cycles                |
| Total Resistance Shift                                     | (Linear taper) 10 ohms or<br>±10 % TRS max. (whichever is greater)<br>(Audio taper) ±20 % maximum | (All tapers) ±5 % TRS maximum |
| Contact Resistance Variation @ 50,000 cycles               |                                                                                                   |                               |
| (Audio taper)                                              | ±3 %                                                                                              | ±3 %                          |
| (Linear taper)                                             | ±2 %                                                                                              | ±2 %                          |
| Moisture Resistance (MIL-STD-202, Method 103, Condition B) |                                                                                                   |                               |
| Total Resistance Shift                                     | (B & E tapers) ±10 % maximum<br>(D, G, S & T tapers) ±20 % maximum                                | ±5 % maximum (all tapers)     |
| Insulation Resistance (500 VDC)                            | 100 megohms minimum                                                                               | 100 megohms minimum           |
| IP Rating                                                  | IP40                                                                                              | IP40                          |

## Mechanical Characteristics

|                                                                 |                                                                                                                                                                                        |                        |
|-----------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| Stop Strength                                                   |                                                                                                                                                                                        |                        |
| 1/4 " and 1/8 " diameter shafts                                 |                                                                                                                                                                                        | 45.19 N-cm (4 lb.-in.) |
| 7/8 " length shaft                                              |                                                                                                                                                                                        | 22.6 N-cm (2 lb.-in.)  |
| Mechanical Angle                                                |                                                                                                                                                                                        | 300 ° ± 5 °            |
| Torque                                                          |                                                                                                                                                                                        |                        |
| Starting and Running Torque (Non-Locking Bushings)              |                                                                                                                                                                                        |                        |
| Single Section                                                  | 0.14 to 1.06 N-cm (0.2 to 1.5 oz.-in.)                                                                                                                                                 |                        |
| Dual Section                                                    | 0.14 to 1.06 N-cm (0.2 to 1.5 oz.-in.)                                                                                                                                                 |                        |
| Triple Section                                                  | 0.35 to 1.41 N-cm (0.5 to 2.0 oz.-in.)                                                                                                                                                 |                        |
| Quadruple Section                                               | 0.35 to 1.41 N-cm (0.5 to 2.0 oz.-in.)                                                                                                                                                 |                        |
| Starting and Running Torque (Locking Bushings)                  | 0.14 to 2.82 N-cm (0.2 to 4.0 oz.-in.)                                                                                                                                                 |                        |
| Shaft Locking Torque with Locknut @ 10 in.-lb. (B & E Bushings) | 14 N-cm (20 oz.-in.)                                                                                                                                                                   |                        |
| Mounting                                                        | 1.7-2.0 N-m (15-18 lb.-in.) maximum                                                                                                                                                    |                        |
| Weight (Single Section)                                         | 21 grams maximum                                                                                                                                                                       |                        |
| (Each Additional Section)                                       | 6 grams maximum                                                                                                                                                                        |                        |
| Terminals                                                       | Printed circuit terminals or J-Hooks                                                                                                                                                   |                        |
| Soldering Condition                                             | Recommended hand soldering using Sn95/Ag5 no clean solder, 0.025 " wire diameter.<br>Maximum temperature 399 °C (750 °F) for 3 seconds. No wash process to be used with no clean flux. |                        |
| Marking                                                         | Manufacturer's trademark, wiring diagram, date code and resistance, manufacturer's part number                                                                                         |                        |
| Ganging (multiple section potentiometers)                       | 4 cup maximum                                                                                                                                                                          |                        |
| Hardware                                                        | One lockwasher and one mounting nut is shipped with each potentiometer, except where noted in the part number.                                                                         |                        |

For dimensional drawings see pages 3 & 4.

For ordering information see page 5.

NOTE: Model 81/82 performance specifications do not apply to units subjected to printed circuit board cleaning procedures.

<sup>1</sup>At room ambient: +25 °C nominal and 50 % relative humidity nominal, except as noted.

\*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.

**81/82 - 5/8 " Square Single-Turn Panel Control**  
**85/86 - 5/8 " Square Single-Turn Panel Control with Rotary Switch**

**BOURNS®**

**Rotary Switch Specifications**

**Initial Electrical Characteristics<sup>1</sup>**

|                                                           |                                                                      |
|-----------------------------------------------------------|----------------------------------------------------------------------|
| Contacts:                                                 |                                                                      |
| DPST.....                                                 | N.O./N.O., N.C./N.C. or N.O./N.C.                                    |
| DPDT.....                                                 | 2 N.O./N.C. (break before make)                                      |
| Power Rating (Resistive Load):                            |                                                                      |
| DPST.....                                                 | 2 A @ 125 volts RMS-60 Hz or 2 A @ 28 VDC, 1 A @ 250 volts RMS-60 Hz |
| DPDT.....                                                 | 1 A @ 125 volts RMS-60 Hz or 1 A @ 28 VDC                            |
| Contact Resistance (0.1 VDC-10 mA).....                   | 10 milliohms nominal                                                 |
| Contact Bounce.....                                       | 5 milliseconds maximum                                               |
| Dielectric Withstanding Voltage (MIL-STD-202, Method 301) |                                                                      |
| Sea Level.....                                            | 1500 VAC minimum                                                     |
| Insulation Resistance.....                                | 1000 megohms minimum                                                 |

**Environmental Characteristics<sup>1</sup>**

|                                                                          |                                                          |
|--------------------------------------------------------------------------|----------------------------------------------------------|
| Operating Temperature Range.....                                         | -40 °C to +70 °C                                         |
| Storage Temperature Range.....                                           | -65 °C to +125 °C                                        |
| Vibration (Dual Section).....                                            | 8 G                                                      |
| (Triple Section).....                                                    | 5 G                                                      |
| (Quadruple Section).....                                                 | 3 G                                                      |
| Contact Resistance.....                                                  | 10 milliohms maximum                                     |
| Contact Bounce.....                                                      | 0.1 millisecond maximum                                  |
| Shock (Dual Section).....                                                | 20 G                                                     |
| (Triple Section).....                                                    | 15 G                                                     |
| (Quadruple Section).....                                                 | 10 G                                                     |
| Contact Resistance.....                                                  | 10 milliohms maximum                                     |
| Contact Bounce.....                                                      | 0.1 millisecond maximum                                  |
| Rotational Life.....                                                     | 25,000 cycles                                            |
| Switch Actuating Torque (50% Duty cycle @ Rated Power Load).....         | 1.41 to 4.94 N-cm (2 to 7 oz.-in.)                       |
| Contact Resistance.....                                                  | 100 milliohms maximum                                    |
| Moisture Resistance (MIL-STD-202, Method 106, Condition B)               |                                                          |
| Contact Resistance (0.1 VDC-10 mA).....                                  | 10 milliohms maximum                                     |
| Insulation Resistance (After 24 Hours @ Room Temperature) (500 VDC)..... | 100 megohms minimum                                      |
| Switch Housing Material.....                                             | High temperature, flame retardant, thermosetting plastic |

**Mechanical Characteristics<sup>1</sup>**

|                                                                   |                                      |
|-------------------------------------------------------------------|--------------------------------------|
| Actuating Torque (Each Section, Switch Module Only).....          | 3.53 to 10.6 N-cm (5 to 15 oz.-in.)  |
| Running Torque (Out of Detent, 2-4 Module Assembly).....          | 0.21 to 1.41 N-cm (0.3 to 2 oz.-in.) |
| Detent.....                                                       | CW or CCW standard                   |
| Actuation Angle.....                                              | 25 °                                 |
| Contact Materials.....                                            | Fine silver with gold overlay        |
| Terminal Styles.....                                              | Solder lug only                      |
| Standard Orientation.....                                         | In-line with control terminals       |
| Optional.....                                                     | Rotated 90 ° CCW from standard       |
| Terminal Strength (Before and After Soldering Heat Exposure)..... | 0.9 Kg (2 lbs.) minimum              |

NOTE: Model 81/82 performance specifications do not apply to units subjected to printed circuit board cleaning procedures.

<sup>1</sup>At room ambient: +25 °C nominal and 50 % relative humidity nominal, except as noted.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

**BOURNS®**


Specifications are subject to change without notice.  
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.  
Users should verify actual device performance in their specific applications.

# 81/82 - 5/8 " Square Single-Turn Panel Control


**BOURNS®**

## Product Dimensions


**Dual Unit - PC Pins & J-Hook**




**Triple Unit - PC Pins & J-Hook**



**Quad Unit - PC Pins & J-Hook**

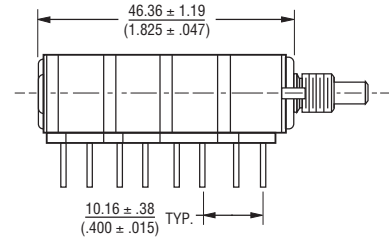


**Model 81/82  
Single Unit - PC Pins & J-Hook**

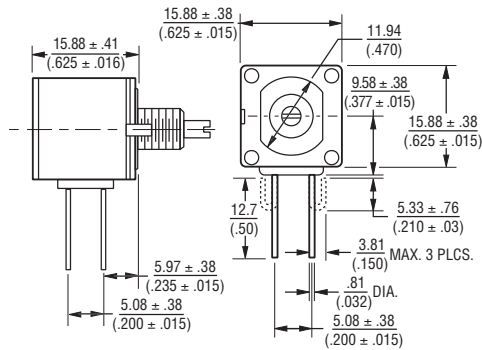


Terminal outlines shown as solid lines represent PC Pins, available on Model 81. Dashed line terminal outline represents "J" Hook, available on Model 82.

**Model 81  
Suggested PC Board Layout - PC Pins  
(Single-Shaft Style Bottom View)**

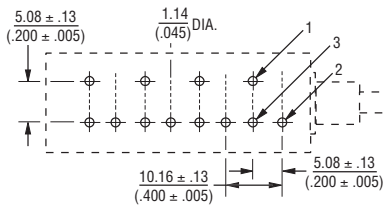


Note: For units with dual concentric shaft styles, a 2.54 (.100) spacer is added between the module(s) driven by the outer shaft and those driven by the inner shaft. For G, K, or V shafts, add the spacer between modules 1 and 2. For L or M shafts, add the spacer between modules 2 and 3. For N or P shafts, add the spacer between modules 3 and 4.

**Shaft Flat Orientation\***



**FLATTED SHAFT**



**SLOTTED SHAFT**

\*EXCLUDES MODELS 83 AND 84

DIMENSIONS:  $\frac{\text{MM}}{(\text{INCHES})}$

Specifications are subject to change without notice.


The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

# 85/86 - 5/8 " Square Single-Turn Panel Control with Rotary Switch


**BOURNS®**

## Product Dimensions


### Primary Potentiometer Module Model 85/86




### Secondary Potentiometer Module Model 85/86

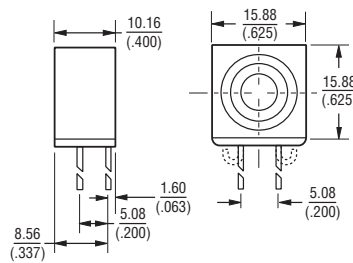



### Shaft Flat Orientation\*

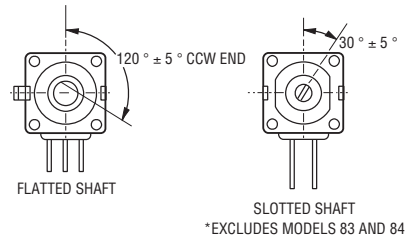



### Switch Module Model 85/86



### Assembly Sequence Model 85/86 Secondary Potentiometer Module



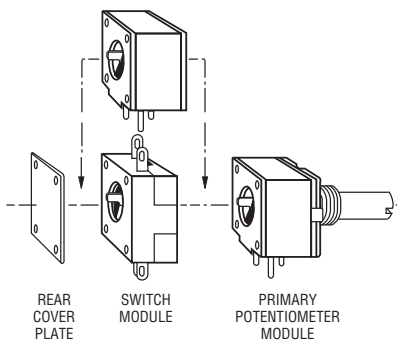


NOTE: Switch terminals shown in vertical position.




Switch contacts shown in detent position.

### Locating Lug Options - All Model 80 Series



$$E = \frac{2.36 \pm .76}{(.093 \pm .03)} \quad H \text{ \& J } = \frac{1.98 \pm .41}{(.078 \pm .016)}$$



NOTE: "D" OPTION - NO A/R LUG. OTHER LOCATING LUG OPTIONS AVAILABLE. FOR DETAILS CONSULT FACTORY.

DIMENSIONS:  $\frac{\text{MM}}{(\text{INCHES})}$

TOLERANCES EXCEPT AS SHOWN: DECIMAL .XXX ±  $\frac{.127}{(.005)}$   
 .XX ±  $\frac{.38}{(.015)}$   
 ANGLE ± 5 %

# 81/82 - 5/8 " Square Single-Turn Panel Control 85/86 - 5/8 " Square Single-Turn Panel Control with Rotary Switch

**BOURNS®**

## How To Order

|    |   |   |   |   |   |    |   |   |    |
|----|---|---|---|---|---|----|---|---|----|
| 81 | A | 2 | A | - | B | 28 | - | A | 15 |
| 85 | A | 2 | A | - | B | 28 | - | A | 15 |

**ANTI-ROTATION LUG**

|   |                               |
|---|-------------------------------|
| A | Single .305 R, 90 °CW         |
| B | Double .305 R, 90 ° & 270 °CW |
| C | Single .305 R, 270 °CW        |
| D | No Lug                        |
| E | Single .531 R, 90 °CW         |
| F | Single .305 R, 180 °CW        |
| J | Single .375 R, 90 °CW         |
| K | Double .375 R, 90 ° & 270 °CW |

**SWITCH TYPE (MODELS 85 & 86 ONLY)**

|       |                                        |
|-------|----------------------------------------|
| (R50) | DPST N.O./N.C. CW Detent In-Line Term  |
| (R51) | DPST N.O./N.C. CCW Detent In-Line Term |
| (R52) | DPST N.O./N.O. CW Detent In-Line Term  |
| (R53) | DPST N.O./N.O. CCW Detent In-Line Term |
| (R56) | DPST N.O./N.C. CW Detent Horz Term     |
| (R57) | DPST N.O./N.C. CCW Detent Horz Term    |
| (R58) | DPST N.O./N.O. CW Detent Horz Term     |
| (R59) | DPST N.O./N.O. CCW Detent Horz Term    |

**# SECTIONS    APPLICABLE MODELS**

|   |        |             |
|---|--------|-------------|
| 1 | Single | 81,82       |
| 2 | Double | 81,82,85,86 |
| 3 | Triple | 81,82,85,86 |
| 4 | Quad   | 81,82,85,86 |

**SHAFT LENGTH (FMS)    AVAILABLE ONLY IN BUSHING**

| Code          | Description | Code             |
|---------------|-------------|------------------|
| 12            | 3/8 " L     | C, N, J          |
| 16            | 1/2 " L     | A, C, J, N       |
| 20            | 5/8 " L     | A, B, C, E, J, N |
| 24            | 3/4 " L     | A, B, C, E, J, N |
| 28            | 7/8 " L     | A, B, C, E, J, N |
| 32            | 1 " L       | A, B, C, E, J, N |
| 36            | 1-1/8 " L   | A, B, C, E, J, N |
| 40            | 1-1/4 " L   | A, B, C, E, J, N |
| <b>Metric</b> |             |                  |
| 10            | 10 mm L     | U                |
| 13            | 13 mm L     | U                |
| 16            | 16 mm L     | R, S             |
| 19            | 19 mm L     | R, S             |
| 22            | 22 mm L     | R, S, U          |
| 30            | 30 mm L     | R, S             |
| 42            | 42 mm L     | R, S             |
| 50            | 50 mm L     | R, S             |

**MODEL**

|    |                                         |
|----|-----------------------------------------|
| 81 | Single-Turn, PC Pins                    |
| 82 | Single-Turn, J-Hooks                    |
| 85 | Single-Turn, Pot/Rotary Switch, PC Pins |
| 86 | Single-Turn, Pot/Rotary Switch, J-Hooks |

**BUSHING**

|   |                                               |
|---|-----------------------------------------------|
| A | Plain 3/8 " (9.53 mm) D x 3/8 " (9.53 mm) L   |
| B | Locking 3/8 " (9.53 mm) D x 1/2 " (12.7 mm) L |
| C | Plain 1/4 " (6.35 mm) D x 1/4 " (6.35 mm) L   |
| E | Locking 1/4 " (6.35 mm) D x 1/2 " (12.7 mm) L |
| J | Plain 3/8 " (9.53 mm) D x 1/4 " (6.35 mm) L   |
| N | Plain 1/4 " (6.35 mm) D x 3/8 " (9.53 mm) L   |
| R | Plain 10 mm D x 9 mm L                        |
| S | Locking 10 mm D x 12.5 mm L                   |
| U | Plain 7 mm D x 6 mm L                         |

**SHAFT TYPE    AVAILABLE ONLY IN LENGTHS (CODE)    BUSHINGS (CODE)**

|   |                                                              |                |         |
|---|--------------------------------------------------------------|----------------|---------|
| A | Single Plain 1/4 " (6.35 mm) D                               | 16,20,24,28    | A, B, J |
| B | Single Slotted 1/4 " (6.35 mm) D                             | 16,20,24,28    | A, B, J |
| C | Single Flatted 1/4 " (6.35 mm) D                             | 20,24,28       | A, B, J |
| E | Single Slotted 1/8 " (3.18 mm) D                             | 12,16,20,24,28 | C, E, N |
| F | Single Flatted 1/8 " (3.18 mm) D                             | 24             | C, N    |
| G | Dual Concentric Plain 1/4 " (6.35 mm) D - 1/8 " (3.18 mm) D  | 36,40          | A, J    |
| K | Dual Concentric Plain 1/8 " (3.18 mm) D - 5/64 " (1.98 mm) D | 32,36          | C, N    |
| L | Dual Concentric Plain 1/4 " (6.35 mm) D - 1/8 " (3.18 mm) D  | 36,40          | A, J    |
| M | Dual Concentric Plain 1/8 " (3.18 mm) D - 5/64 " (1.98 mm) D | 32,36          | C, N    |
| N | Dual Concentric Plain 1/4 " (6.35 mm) D - 1/8 " (3.18 mm) D  | 36,40          | A, J    |
| P | Dual Concentric Plain 1/8 " (3.18 mm) D - 5/64 " (1.98 mm) D | 32,36          | C, N    |
| R | Single Slotted 6 mm D                                        | 16,19,22,50    | R, S    |
| T | Single Slotted 4 mm D                                        | 10, 13, 22     | U       |
| V | Dual Concentric Plain 6 mm D - 3 mm D                        | 30, 42         | R       |

**ELEMENT TAPER TYPE/TOLERANCE    RESISTANCE CODE VALUE IN OHMS**

|                                        |                                                                                                                                                           |              |              |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------|
| (A)<br>(H)                             | <b>Linear Cermet ±10 %</b><br>Linear Cermet ±5 %                                                                                                          | (05) - 100   | (30) - 15 K  |
|                                        |                                                                                                                                                           | (28) - 150   | (16) - 20 K  |
|                                        |                                                                                                                                                           | (06) - 200   | (17) - 25 K  |
|                                        |                                                                                                                                                           | (07) - 250   | (18) - 50 K  |
|                                        |                                                                                                                                                           | (08) - 500   | (19) - 75 K  |
| (B)<br>(E)                             | <b>Linear C-P ±20 %</b><br>Linear C-P ±10 %                                                                                                               | (09) - 750   | (20) - 100 K |
|                                        |                                                                                                                                                           | (10) - 1 K   | (31) - 150 K |
|                                        |                                                                                                                                                           | (29) - 1.5 K | (21) - 200 K |
|                                        |                                                                                                                                                           | (11) - 2 K   | (22) - 250 K |
|                                        |                                                                                                                                                           | (12) - 2.5 K | (23) - 500 K |
| (C)<br>(D)<br>(F)<br>(G)<br>(S)<br>(T) | <b>CW Audio Cermet ±10 %</b><br><b>CCW Audio C-P ±20 %</b><br>CCW Audio Cermet ±10 %<br>CCW Audio C-P ±20 %<br>CCW Audio C-P ±10 %<br>CCW Audio C-P ±10 % | (13) - 5 K   | (24) - 750 K |
|                                        |                                                                                                                                                           | (14) - 7.5 K | (25) - 1 M   |
|                                        |                                                                                                                                                           | (15) - 10 K  |              |
|                                        |                                                                                                                                                           | (16) - 20 K  |              |
|                                        |                                                                                                                                                           | (17) - 25 K  |              |
| (C)<br>(D)<br>(F)<br>(G)<br>(S)<br>(T) | <b>CW Audio Cermet ±10 %</b><br><b>CCW Audio C-P ±20 %</b><br>CCW Audio Cermet ±10 %<br>CCW Audio C-P ±20 %<br>CCW Audio C-P ±10 %<br>CCW Audio C-P ±10 % | (10) - 1 K   | (18) - 50 K  |
|                                        |                                                                                                                                                           | (12) - 2.5 K | (20) - 100 K |
|                                        |                                                                                                                                                           | (13) - 5 K   | (22) - 250 K |
|                                        |                                                                                                                                                           | (15) - 10 K  | (23) - 500 K |
|                                        |                                                                                                                                                           | (16) - 20 K  | (25) - 1 M   |

**RoHS IDENTIFIER**

|   |           |
|---|-----------|
| L | Compliant |
|---|-----------|

**Boldface features are Bourns standard options.**  
All others are available with higher minimum order quantities.

REV. 03/13

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9