


# 3-Channel 2:1 Mux/DeMux, Enable Low 1.8V/2.5V/3.3V, High-Bandwidth, Hot Plug


# **Features**

- Near-Zero propagation delay
- 5-ohm switches connect inputs to outputs
- High signal passing bandwidth (500 MHz)
- Beyond Rail-to-Rail switching
  - 0 to 5V switching with 3.3V power supply
  - 0 to 3.3V switching with 2.5V power supply
- 5V I/O tolerant with supply in OFF and ON state
- 1.8V, 2.5V and 3.3V supply voltage operation
- Hot Insertion Capable
- Industrial Operating Temperature: -40 °C to +85 °C
- 8kV ESD Protection (human body model)
- Latch-up Performance: >200mA per JESD17
- Packaging (Pb-free & Green available):
  - -16-pin 173-mil wide plastic TSSOP (L)

# **Pin Configuration**



# **Block Diagram**



# **Description**

The PI3CH360 is a 3-channel, 2:1 Multiplexer/ Demultiplexer with 3-state outputs. The switch introduces no additional ground bounce noise or propagation delay.

The PI3CH360 device is very useful in switching signals that have high bandwidth (500 MHz).

# **Pin Description**

Pin No	Pin Name	Description
1	S	Select Inputs
2, 3, 7	NC	Not connected
4, 5, 6	YA, YB, YC	Data Outputs
8	GND	Ground
9, 10, 11, 12, 13, 14	IC1, IB1, IA1, IC0, IB0, IA0	Data Inputs
15	EN	Enable
16	$V_{CC}$	Power

# Truth Table<sup>(1)</sup>

EN	S	YA	YB	YC	Function
Н	X	Hi-Z	Hi-Z	Hi-Z	Disable
L	L	IA0	IB0	IC0	S=0
L	Н	IA1	IB1	IC1	S=1

#### Note:

1. H=High Voltage Level L=Low Voltage Level





# **Maximum Ratings**

Storage Temperature	-65°C to +150°C
Ambient Temperature with Power Applied	
Supply Voltage to Ground Potential	-0.5V to +4.6V
DC Input Voltage	0.5V to $+6.0$ V
DC Output Current	120mA
Power Dissipation	0.5W

#### Note:

Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

# **DC** Electrical Characteristics

3.3V supply (Over operating range,  $T_A = -40 \sim +85 \, \text{C}$ ,  $V_{CC} = 3.3 \, \text{V} \pm 10 \, \text{W}$ , unless otherwise noted)

Symbol	Description	<b>Test Conditions</b> <sup>(1)</sup>	Min	$\mathbf{Typ}^{(2)}$	Max	Unit
$V_{IH}$	Control Input HIGH Voltage	Guaranteed Logic HIGH Level	2.0	-	-	V
$V_{\rm IL}$	Control Input LOW Voltage	Guaranteed Logic LOW Level	-0.5	-	0.8	V
V <sub>IK</sub>	Clamp Diode Voltage	$V_{CC} = Min., I_{IN} = -18mA$	-	-1.3	-1.8	V
$I_{\mathrm{IH}}$	Input HIGH Current	$V_{CC} = Max., V_{IN} = V_{CC}$	-	-	±1	μΑ
${ m I}_{ m IL}$	Input Low Current	$V_{CC} = Max., V_{IN} = GND$	-	-	±1	μΑ
$I_{OZH}$	High-Impedance Current <sup>(3)</sup>	$0 \le Y$ , $In \le V_{CC}$	-	-	±1	μΑ
D	Switch On-Resistance <sup>(4)</sup>	$V_{CC} = Min., V_{IN} = 0.0V$ $I_{ON} = -48mA \text{ or } -64mA$	-	4	6	Ω
$R_{ON}$	Switch On-Resistance	$V_{CC} = Min., V_{IN} = 3.6V$ $I_{ON} = -15mA$	-	5	8	22

#### **Notes:**

- 1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device type.
- 2. Typical values are at  $V_{CC} = 3.3V$ , TA = 25 °C ambient and maximum loading.
- 3. Not more than one output should be shorted at one time. Duration of the test should not exceed one second.
- 4. Measured by the voltage drop between Y and In pin at indicated current through the switch. ON resistance is determined by the lower of the voltages on the two (Y, In) pins.

2.5V supply (Over operating range,  $T_A = -40 \sim +85$  °C,  $V_{CC} = 2.5$ V ±10%, unless otherwise noted)

Symbol	Description	Test Conditions <sup>(1)</sup>	Min	$\mathbf{Typ}^{(2)}$	Max	Unit
$V_{\mathrm{IH}}$	Control Input HIGH Voltage	Guaranteed Logic HIGH Level	1.8	-	V <sub>CC</sub> +0.3	V
$V_{\rm IL}$	Control Input LOW Voltage	Guaranteed Logic LOW Level	-0.3	-	0.8	V
V <sub>IK</sub>	Clamp Diode Voltage	$V_{CC} = Max., I_{IN} = -6mA$	-	-0.7	-1.8	V
$I_{IH}$	Input HIGH Current	$V_{CC} = Max., V_{IN} = V_{CC}$	-	-	±1	μΑ
${ m I}_{ m IL}$	Input Low Current	$V_{CC} = Max., V_{IN} = GND$	-	-	±1	μΑ
$I_{OZH}$	High-Impedance Current <sup>(3)</sup>	$0 \le Y$ , $In \le V_{CC}$	-	-	±1	μΑ
D	Switch On-Resistance <sup>(4)</sup>	$V_{CC} = Min., V_{IN} = 0.0V$ $I_{ON} = -48mA$	-	4	8	Ω
$R_{ON}$	Switch On-Resistance	$V_{CC} = Min., V_{IN} = 2.25V$ $I_{ON} = -15mA$	-	7	14	52

## Notes:

- 1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device type.
- 2. Typical values are at  $V_{CC} = 2.5V$ , TA = 25 °C ambient and maximum loading.
- 3. Not more than one output should be shorted at one time. Duration of the test should not exceed one second.
- 4. Measured by the voltage drop between Y and In pin at indicated current through the switch. ON resistance is determined by the lower of the voltages on the two (Y, In) pins.



# 3-Channel 2:1 Mux/DeMux, Enable Low 1.8V/2.5V/3.3V, High-Bandwidth, Hot Plug

1.8V supply (Over operating range,  $T_A = -40 \sim +85 \text{ C}$ ,  $V_{CC} = 1.8V \pm 10\%$ , unless otherwise noted)

Symbol	Description	Test Conditions <sup>(1)</sup>	Min	Typ <sup>(2)</sup>	Max	Unit
$V_{IH}$	Control Input HIGH Voltage	Guaranteed Logic HIGH Level	1.2	-	V <sub>CC</sub> +0.3	V
$V_{\rm IL}$	Control Input LOW Voltage	Guaranteed Logic LOW Level	-0.3	-	0.6	V
$V_{IK}$	Clamp Diode Voltage	$V_{CC} = Min., I_{IN} = -18mA$	-	-0.7	-1.8	V
$I_{IH}$	Input HIGH Current	$V_{CC} = Max., V_{IN} = V_{CC}$	1	1	±1	μΑ
${ m I}_{ m IL}$	Input Low Current	$V_{CC} = Max., V_{IN} = GND$	-	-	±1	μΑ
$I_{OZH}$	High-Impedance Current <sup>(3)</sup>	$0 \le Y$ , $In \le V_{CC}$	-	ı	±1	μΑ
D	Switch On-Resistance <sup>(4)</sup>	$V_{CC} = Min., V_{IN} = 0.0V$ $I_{ON} = -48mA$	-	4	8	Ω
$R_{ON}$	Switch On-Resistance	$V_{CC} = Min., V_{IN} = 1.6V$ $I_{ON} = -15mA$	-	10	25	22

#### Notes:

- 1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device type.
- 2. Typical values are at  $V_{CC} = 1.8V$ , TA = 25 °C ambient and maximum loading.
- 3. Not more than one output should be shorted at one time. Duration of the test should not exceed one second.
- 4. Measured by the voltage drop between Y and In pin at indicated current through the switch. ON resistance is determined by the lower of the voltages on the two (Y, In) pins.

**Capacitance** ( $T_A = 25 \, \text{C}$ , f=1 MHz)

Symbol <sup>(1)</sup>	Description	Test Conditions	Typ <sup>(2)</sup>	Unit
$C_{IN}$	Input Capacitance		3.0	
C <sub>OFF(IN)</sub>	In Capacitance, Switch Off	V - 0V	3.5	T
$C_{OFF(Y)}$	Y Capacitance, Switch Off	$V_{IN} = 0V$	7.0	pF
C <sub>ON</sub>	Y/In Capacitance, Switch On		10.0	

#### Note:

1. These parameters are determined by device characterization but are not production tested

**Power Supply Characteristics** 

Symbol	Description	Test Conditions <sup>(1)</sup>	Min	Typ <sup>(2)</sup>	Max	Unit
$I_{CC}$	Quiescent Power Supply Current	$V_{CC} = 3.6V$ , $V_{IN} = GND$ or $V_{CC}$	-	0.2	0.5	mA

#### Note:

- 1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device.
- 2. Typical values are at +25 °C ambient.

## **Dynamic Electrical Characteristics**

(Over Operating Range,  $T_A = -40 \sim +85 \,\text{C}$ ,  $V_{CC} = 3.3 \text{V} \pm 10\%$ )

Symbol	Description	Test Conditions	Min	Тур	Max	Unit
$X_{TALK}$	Crosstalk	See test Diagram	-	-60	-	dB
${ m O_{IRR}}$	Off-Isolation	See test Diagram	-	-60	-	uБ
BW	-3dB Bandwidth	See test Diagram	-	500	-	MHz

#### **Switch Characteristics**

Over 3.3V Operating Range

Symbol	Description	Test Conditions <sup>(1)</sup>	Min	Тур	Max	Unit
$t_{\rm PLH,}t_{\rm PHL}$	Propagation Delay <sup>(2, 3)</sup> Y to In, In to Y	See test Diagram	-	-	0.3	
$t_{PZH,} t_{PZL}$	Enable Time S or EN to Y or In	See test Diagram	1.5	-	9.0	ns
$t_{PHZ,}$ $t_{PLZ}$	Disable Time S or EN to Y or In	See test Diagram	1.5	-	9.0	



# 3-Channel 2:1 Mux/DeMux, Enable Low 18V/25V/33V, High-Bandwidth, Hot Plug

#### Note

- 1. See test circuit and waveforms.
- 2. This parameter is guaranteed but not tested on Propagation Delays.
- 3. The switch contributes no propagation delay other than the RC delay of the On-Resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.30ns for 10pF load. Since this time constant is much smaller than the rise/fall times of typical driving signals, it adds very little propagation delay to the system. Propagation delay of the switch when used in a system is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.

Over 2.5V Operating Range

Symbol	Description	Test Conditions <sup>(1)</sup>	Min	Тур	Max	Unit
$t_{\rm PLH,}t_{\rm PHL}$	Propagation Delay $^{(2, 3)}$ Y to In, In to Y	See test Diagram	-	-	0.3	
t <sub>PZH</sub> , t <sub>PZL</sub>	Enable Time S or $\overline{EN}$ to Y or In	See test Diagram	1.5	-	15.0	ns
t <sub>PHZ</sub> , t <sub>PLZ</sub>	Disable Time S or EN to Y or In	See test Diagram	1.5	-	12.0	

#### Note:

- 1. See test circuit and waveforms.
- 2. This parameter is guaranteed but not tested on Propagation Delays.
- 3. The switch contributes no propagation delay other than the RC delay of the On-Resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.30ns for 10pF load. Since this time constant is much smaller than the rise/fall times of typical driving signals, it adds very little propagation delay to the system. Propagation delay of the switch when used in a system is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.


Over 1.8V Operating Range

Symbol	Description	Test Conditions <sup>(1)</sup>	Min	Тур	Max	Unit
t <sub>PLH</sub> , t <sub>PHL</sub>	Propagation Delay <sup>(2, 3)</sup> Y to In, In to Y	See test Diagram	-	-	0.3	
t <sub>PZH</sub> , t <sub>PZL</sub>	Enable Time S or $\overline{EN}$ to Y or In	See test Diagram	1.5	-	25.0	ns
t <sub>PHZ</sub> , t <sub>PLZ</sub>	Disable Time S or EN to Y or In	See test Diagram	1.5	-	12.0	

#### Note:

- 1. See test circuit and waveforms.
- 2. This parameter is guaranteed but not tested on Propagation Delays.
- 3. The switch contributes no propagation delay other than the RC delay of the On-Resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.30ns for 10pF load. Since this time constant is much smaller than the rise/fall times of typical driving signals, it adds very little propagation delay to the system. Propagation delay of the switch when used in a system is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.

#### **Test Circuit for Electrical Characteristics**

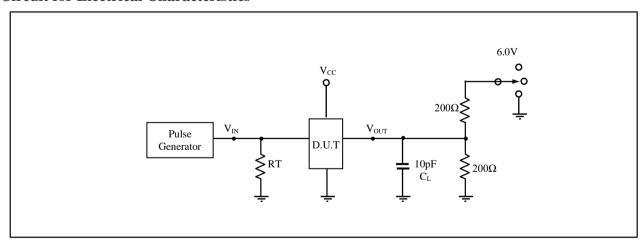

#### **Notes:**


- 1.  $C_L = Load$  capacitance: includes jig and probe capacitance.
- 2. RT = Termination resistance: should be equal to ZouT of the Pulse Generator
- 3. All input impulses are supplied by generators having the following characteristics:  $PRR \le 10 \text{ MHz}$ ,  $Z_O = 50$ -ohm,  $t_R \le 2.5 \text{ns}$ ,  $t_F \le 2.5 \text{ns}$
- 4. The outputs are measured one at a time with one transition per measurement.




## **Switch Positions**

Test	Switch
t <sub>PLZ</sub> , t <sub>PZL</sub>	6.0V
t <sub>PHZ</sub> , t <sub>PZH</sub> .	GND
Prop Delay	Open

# **Test Circuit for Dynamic Electrical Characteristics**

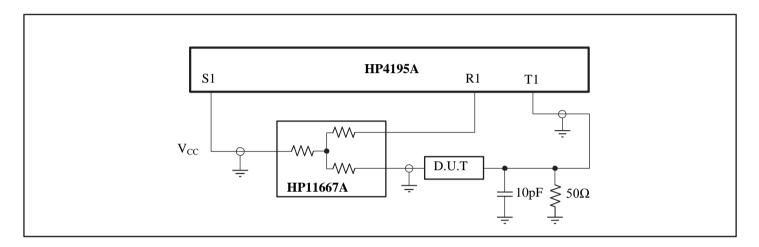

# **Switching Waveforms**

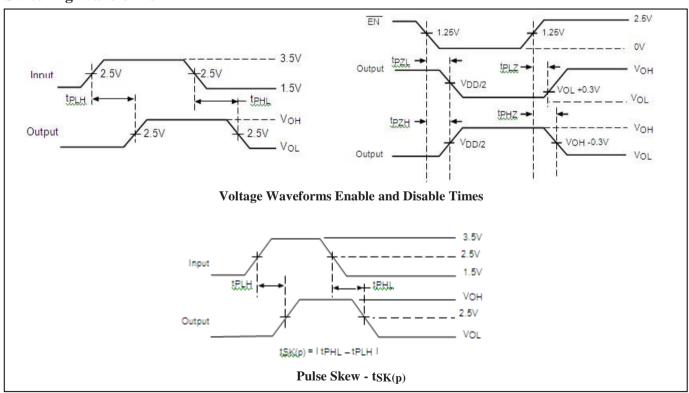





# 3-Channel 2:1 Mux/DeMux, Enable Low 18V/25V/33V, High-Bandwidth, Hot Plug

# **Applications Information**

## **Logic Inputs**

The logic control inputs can be driven up to 3.6V regardless of the supply voltage. For example, given a +3.3V supply,  $\overline{EN}$  may be driven LOW to 0V and HIGH to 3.6V. Driving  $\overline{EN}$  Rail-to-Rail<sup>®</sup> minimizes power consumption.

#### **Hot Insertion**


For Datacom and Telecom applications that have ten or more volts passing through the backplane, a high voltage from the power supply may be seen at the device input pins during hot insertion. The PI3CH360 devices have maximum limits of 6V and 120mA for 20ns. If the power is higher or applied for a longer time or repeatedly reaches the maximum limits, the devices can be damaged.

 ${\it Rail-to-Rail is \ a \ registered \ trademark \ of \ Nippon \ Motorola, \ Ltd.}$ 



# **Mechanical Information**

16-Pin TSSOP(L)

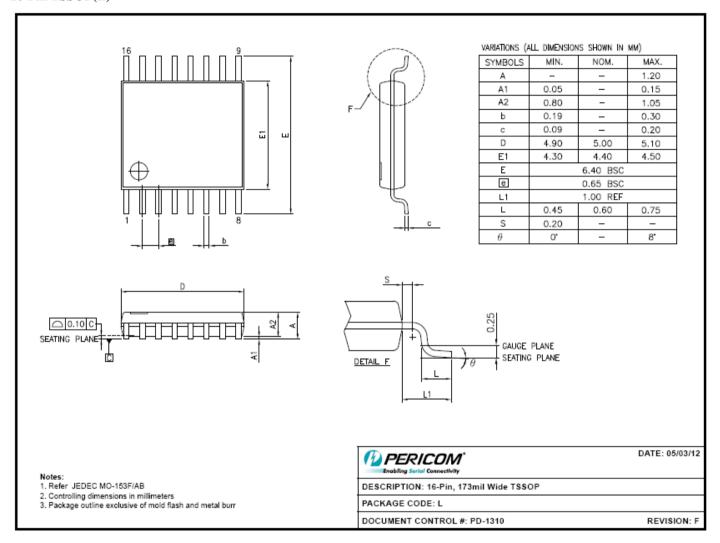

# **Ordering Information**

Part No.	Package Cede	Package
PI3CH360LE	L	Lead free and Green 16-Pin TSSOP
PI3CH360LEX	L	Lead free and Green 16-Pin TSSOP, Tape &Reel

#### Note:

- E = Pb-free & Green
- Adding X Suffix= Tape/Reel

### Pericom Semiconductor Corporation • 1-800-435-2336 • www.pericom.com

Pericom reserves the right to make changes to its products or specifications at any time, without notice, in order to improve design or performance and to supply the best possible product. Pericom does not assume any responsibility for use of any circuitry described other than the circuitry embodied in Pericom product. The company makes no representations that circuitry described herein is free from patent infringement or other rights, of Pericom.

# **ПОСТАВКА** ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

# Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

# http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

# Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru\_6 moschip.ru\_4 moschip.ru\_9