
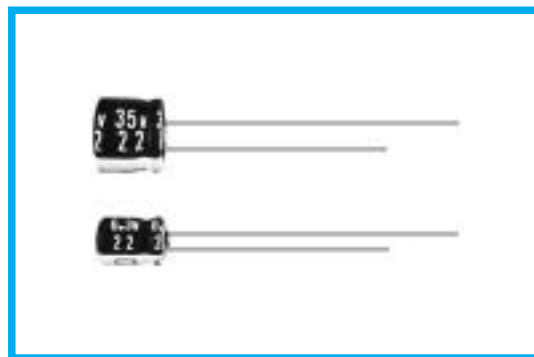


MH5 SERIES

105°C 5mm Height.

◆FEATURES

- RoHS compliance.



◆SPECIFICATIONS

Items	Characteristics																											
Category Temperature Range	-40~+105℃																											
Rated Voltage Range	6.3~50V.DC																											
Capacitance Tolerance	±20% (20℃, 120Hz)																											
Leakage Current(MAX)	I=0.01CV or 3 μ A whichever is greater. (After 2 minutes application of rated voltage) I=Leakage Current(μ A) C=Rated Capacitance(μ F) V=Rated Voltage(V)																											
Dissipation Factor(MAX) (tan δ)	<table><tr><td>Rated Voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td></tr><tr><td>tan δ</td><td>0.28</td><td>0.24</td><td>0.20</td><td>0.16</td><td>0.13</td><td>0.12</td></tr></table> (20℃, 120Hz)							Rated Voltage (V)	6.3	10	16	25	35	50	tan δ	0.28	0.24	0.20	0.16	0.13	0.12							
Rated Voltage (V)	6.3	10	16	25	35	50																						
tan δ	0.28	0.24	0.20	0.16	0.13	0.12																						
Endurance	After applying rated voltage with rated ripple current for 1000 hrs at 105℃, the capacitors shall meet the following requirements. <table><tr><td>Capacitance Change</td><td colspan="6">Within ±25% of the initial value.</td></tr><tr><td>Dissipation Factor</td><td colspan="6">Not more than 200% of the specified value.</td></tr><tr><td>Leakage Current</td><td colspan="6">Not more than the specified value.</td></tr></table>							Capacitance Change	Within ±25% of the initial value.						Dissipation Factor	Not more than 200% of the specified value.						Leakage Current	Not more than the specified value.					
Capacitance Change	Within ±25% of the initial value.																											
Dissipation Factor	Not more than 200% of the specified value.																											
Leakage Current	Not more than the specified value.																											
Low Temperature Stability Impedance Ratio(MAX)	<table><tr><td>Rated Voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td></tr><tr><td>Z(-25℃)/Z(20℃)</td><td>3</td><td>3</td><td>2</td><td>2</td><td>2</td><td>2</td></tr><tr><td>Z(-40℃)/Z(20℃)</td><td>8</td><td>5</td><td>4</td><td>3</td><td>3</td><td>3</td></tr></table> (120Hz)							Rated Voltage (V)	6.3	10	16	25	35	50	Z(-25℃)/Z(20℃)	3	3	2	2	2	2	Z(-40℃)/Z(20℃)	8	5	4	3	3	3
Rated Voltage (V)	6.3	10	16	25	35	50																						
Z(-25℃)/Z(20℃)	3	3	2	2	2	2																						
Z(-40℃)/Z(20℃)	8	5	4	3	3	3																						

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency coefficient


Frequency (Hz)		60 (50)	120	500	1k	10k≤
Coefficient	0.1~1 μF	0.50	1.0	1.20	1.30	1.50
	2.2~4.7 μF	0.65	1.0	1.20	1.30	1.50
	10~47 μF	0.8	1.0	1.20	1.30	1.50
	100 μF	0.8	1.0	1.10	1.15	1.20

◆PART NUMBER

 MH5 D×L
 Rated Voltage Series Rated Capacitance Capacitance Tolerance Option Lead Forming Case Size

◆DIMENSIONS

(mm)

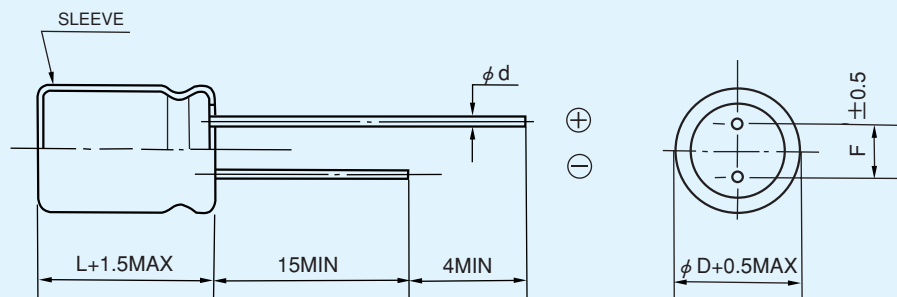

ϕD	4	5	6.3
ϕd	0.45		
F	1.5	2.0	2.5

◆STANDARD SIZE, RATED RIPPLE CURRENT

 Size $\phi D \times L$ (mm), Ripple Current (mA r.m.s./105°C, 120Hz)

Cap (μF) \ WV (V.DC)	6.3 (0J)		10 (1A)		16 (1C)		25 (1E)		35 (1V)		50 (1H)	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.1											4×5	1
0.22											4×5	2
0.33											4×5	3
0.47											4×5	4
1											4×5	8
2.2											4×5	13
3.3											4×5	14
4.7									4×5	17	5×5	18
10					4×5	20	5×5	22	5×5	24	6.3×5	28
22	4×5	23	5×5	28	5×5	31	6.3×5	44	6.3×5	48		
33	5×5	30	5×5	34	6.3×5	48	6.3×5	48				
47	5×5	37	6.3×5	52	6.3×5	56	6.3×5	56				
100	6.3×5	57	6.3×5	62	6.3×5	62						

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9