
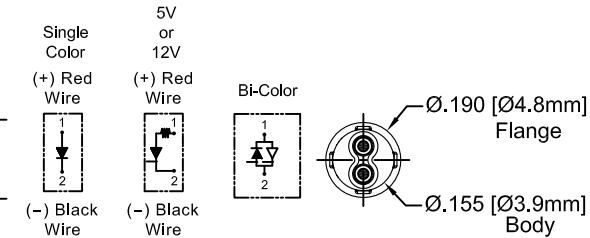



| ITEM | Q'TY | PART NUMBER   | PART DESCRIPTION                                                                                      |
|------|------|---------------|-------------------------------------------------------------------------------------------------------|
| 1    | 1    | PM3-XXX       | LED Holder, Panel Mount, Press Fit, (3mm)<br>PM3 (Standard LED), PM3-5V (5V LED), & PM3-12V (12V LED) |
| 2    | 1    | 3XXX-S        | T-1 (3mm) Non-Flange Low Current LED, See Page 2.                                                     |
| 3    | 1    | BWS24-1061-RD | 24AWG Wire Lead U.L. 1061, Red                                                                        |
| 4    | 1    | BWS24-1061-BK | 24AWG Wire Lead U.L. 1061, Black                                                                      |
| 5    | 2    | 2665S020000   | Leoco 2665 Series 2.54mm (100") Crimp Type Socket, 1X                                                 |
| 6    | 1    | 2653TPB0001   | Leoco Terminal# 2653TPB0001 (Reel) 2653TPB00A1(Bulk)                                                  |

| REV. | DESCRIPTION                                  | DATE     | APPROVED |
|------|----------------------------------------------|----------|----------|
| A    | Engineering Release                          | 04/09/07 | M. C.    |
| B    | Updated Notes                                | 09/07/07 | M. C.    |
| C    | Connector Shipped Separate Note Update.      | 11/08/07 | M. C.    |
| D    | Added 3YCL LED to Page 3                     | 02/06/08 | M. C.    |
| E    | Updated BOM item #1 and Updated LED Offering | 11/12/12 | T. Y.    |
| F    | Updated LED P/N to 3XXX-S in BOM             | 12/19/12 | T. Y.    |

Note: Connector Shipped Non-Assembled in Separate Bag

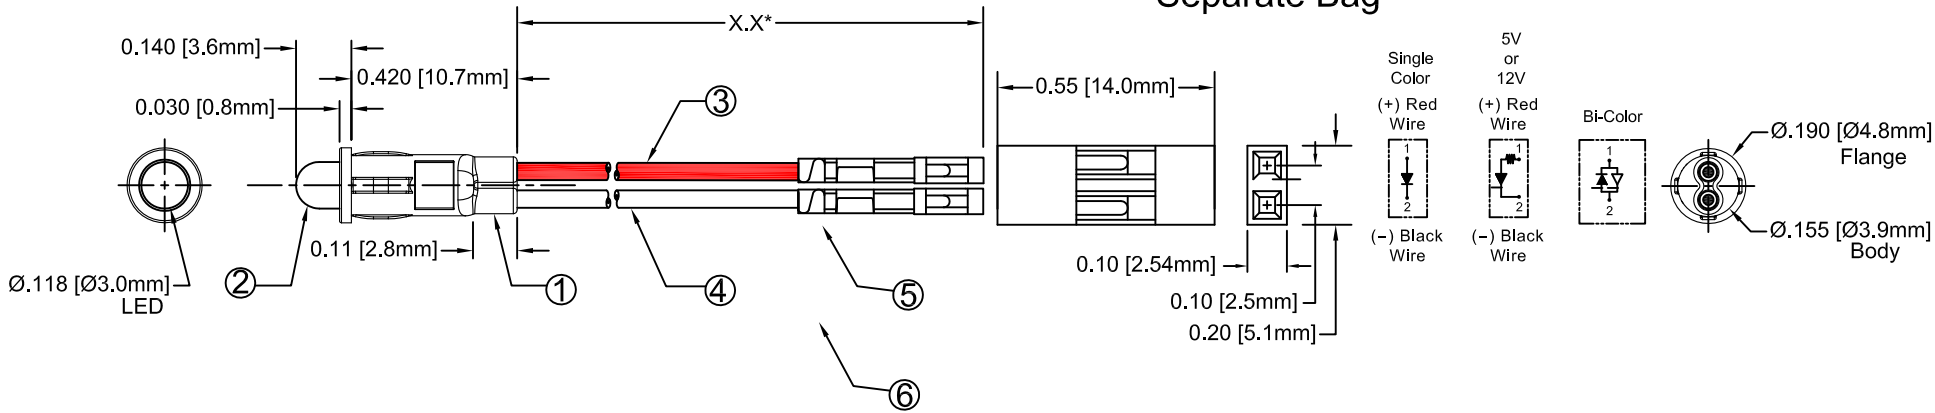

| BI-COLOR POLARITY |             |             |
|-------------------|-------------|-------------|
| LED P/N           | (1) Cathode | (2) Cathode |
| 3BC               | Green       | Red         |
| 3BC-Y/G           | Green       | Yellow      |
| 3BC-R/Y           | Yellow      | Red         |
| 3BC-A/G           | Green       | Amber       |



EXAMPLE:  
**PM3RDW6.5\*-CC**  
 Connector  
 Wire Length "X"  
 LED Color & Lens Appearance.  
 Series

\* X.X = Wire Length "X"

## ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

|                                              |                     |
|----------------------------------------------|---------------------|
| REVERSE VOLTAGE                              | 5V                  |
| REVERSE CURRENT ( VR=5V)                     | 100µA               |
| OPERATING TEMPERATURE RANGE                  | -25°C ~ 85°C        |
| STORAGE TEMPERATURE                          | -30°C ~ 100°C       |
| LEAD SOLDERING TEMPERATURE (1/16" FROM BODY) | 260°C for 5 Seconds |

|                                                      |                          |                                                                                                                  |  |
|------------------------------------------------------|--------------------------|------------------------------------------------------------------------------------------------------------------|--|
| STANDARD TOLERANCE<br>( UNLESS OTHERWISE SPECIFIED ) |                          | <br><b>BIVAR</b> ®<br>4 THOMAS, IRVINE, CA. 92618<br>TEL: (949) 951-8808 FAX: (949) 951-3974                     |  |
| DECIMALS                                             | ANGULAR                  |                                                                                                                  |  |
| .X ± .1                                              | X° ± 1°                  | <br><b>TITLE:</b><br>T-1 (3mm) PANEL MOUNT ASSEMBLY<br><b>PART NO:</b><br>PM3XXXWX.X-CC<br><b>REVISION:</b><br>F |  |
| .XX ± .02                                            |                          |                                                                                                                  |  |
| .XXX ± .010                                          |                          |                                                                                                                  |  |
| DESIGNED:<br><b>Dan Beckman</b>                      | DATE:<br><b>04/09/07</b> | <b>CAGE CODE : 32559</b> <b>SHEET # 1 OF 4</b><br>CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING.                |  |
| CHECKED:<br><b>T. Yin</b>                            | DATE:<br><b>04/09/07</b> |                                                                                                                  |  |

| REV. | DESCRIPTION  | DATE | APPROVED |
|------|--------------|------|----------|
|      | SEE SHEET#1. |      |          |
|      |              |      |          |

| LED Assy.No.     | Chip      |                  |               | Lens Appearance | Electro-Optical Data @20mA |        |     |          | Viewing Angle<br>2 θ 1/2<br>(Deg) | LED P/N |
|------------------|-----------|------------------|---------------|-----------------|----------------------------|--------|-----|----------|-----------------------------------|---------|
|                  | Material  | Peak Wave Length | Emitted Color |                 | If (mA)                    | Vf (V) |     | Iv (mcd) |                                   |         |
|                  |           |                  |               |                 | MAX                        | TYP    | MAX | TYP      |                                   |         |
| PM3BWCWX.X-CC    | GaN/SiC   | 430              | BLUE          | WATER CLEAR     | 25                         | 4      | 4.5 | 25       | 30                                | 3BWC0S  |
| PM3BWDWX.X-CC    | GaN/SiC   | 430              | BLUE          | DIFFUSED        | 25                         | 4      | 4.5 | 10       | 40                                | 3BWD0S  |
| PM3BWTWX.X-CC    | GaN/SiC   | 430              | BLUE          | TINTED          | 25                         | 4      | 4.5 | 25       | 30                                | 3BWT-S  |
| PM3GCWX.X-CC     | GaP/GaP   | 568              | GREEN         | WATER CLEAR     | 30                         | 2.1    | 2.8 | 40       | 30                                | 3GC-S   |
| PM3GDWX.X-CC     | GaP/GaP   | 568              | GREEN         | DIFFUSED        | 30                         | 2.1    | 2.8 | 25       | 40                                | 3GD-S   |
| PM3GTWX.X-CC     | GaP/GaP   | 568              | GREEN         | TINTED          | 30                         | 2.1    | 2.8 | 40       | 30                                | 3GT-S   |
| PM3PGCWX.X-CC    | GaP/GaP   | 555              | PURE GREEN    | WATER CLEAR     | 30                         | 2.2    | 2.8 | 10       | 30                                | 3PGC-S  |
| PM3PGDWX.X-CC    | GaP/GaP   | 555              | PURE GREEN    | DIFFUSED        | 30                         | 2.2    | 2.8 | 5        | 40                                | 3PGD-S  |
| PM3PGTWX.X-CC    | GaP/GaP   | 555              | PURE GREEN    | TINTED          | 30                         | 2.2    | 2.8 | 10       | 30                                | 3PGT-S  |
| PM3YCWX.X-CC     | GaAsp/GaP | 590              | YELLOW        | WATER CLEAR     | 30                         | 2      | 2.8 | 40       | 30                                | 3YC-S   |
| PM3YDWX.X-CC     | GaAsp/GaP | 590              | YELLOW        | DIFFUSED        | 30                         | 2      | 2.8 | 20       | 40                                | 3YD-S   |
| PM3YTWX.X-CC     | GaAsp/GaP | 590              | YELLOW        | TINTED          | 30                         | 2      | 2.8 | 40       | 30                                | 3YT-S   |
| PM3ACWX.X-CC     | GaAsp/GaP | 605              | AMBER         | WATER CLEAR     | 30                         | 2      | 2.8 | 40       | 30                                | 3AC-S   |
| PM3ADWX.X-CC     | GaAsp/GaP | 605              | AMBER         | DIFFUSED        | 30                         | 2      | 2.8 | 25       | 40                                | 3AD-S   |
| PM3ATWX.X-CC     | GaAsp/GaP | 605              | AMBER         | TINTED          | 30                         | 2      | 2.8 | 40       | 30                                | 3AT-S   |
| PM3HCWX.X-CC     | GaAsp/GaP | 625              | HE RED        | WATER CLEAR     | 30                         | 2      | 2.8 | 50       | 30                                | 3HC-S   |
| PM3HDWX.X-CC     | GaAsp/GaP | 625              | HE RED        | DIFFUSED        | 30                         | 2      | 2.8 | 30       | 40                                | 3HD-S   |
| PM3HTWX.X-CC     | GaAsp/GaP | 625              | HE RED        | TINTED          | 30                         | 2      | 2.8 | 50       | 30                                | 3HT-S   |
| PM3RCWX.X-CC     | GaP/GaP   | 700              | RED           | WATER CLEAR     | 20                         | 2      | 2.8 | 2.5      | 30                                | 3RC-S   |
| PM3RDWX.X-CC     | GaP/GaP   | 700              | RED           | DIFFUSED        | 20                         | 2.1    | 2.8 | 2        | 40                                | 3RD-S   |
| PM3RTWX.X-CC     | GaP/GaP   | 700              | RED           | TINTED          | 20                         | 2.1    | 2.8 | 2.5      | 30                                | 3RT-S   |
| PM3BCWX.X-CC-A/G | GaAsp/GaP | 605              | AMBER         | DIFFUSED        | 30                         | 2      | 2.8 | 6        | 45                                | 3BC-A/G |
|                  | GaP/GaP   | 568              | GREEN         |                 | 30                         | 2.1    | 2.8 | 6        |                                   |         |
| PM3BCWX.X-CC     | GaAsp/GaP | 625              | RED           | DIFFUSED        | 30                         | 2      | 2.8 | 6        | 45                                | 3BC     |
|                  | GaP/GaP   | 568              | GREEN         |                 | 30                         | 2.1    | 2.8 | 6        |                                   |         |
| PM3BCWX.X-CC-R/Y | GaAsp/GaP | 625              | RED           | DIFFUSED        | 30                         | 2      | 2.8 | 6        | 45                                | 3BC-R/Y |
|                  | GaAsp/GaP | 590              | YELLOW        |                 | 30                         | 2      | 2.8 | 4        |                                   |         |
| PM3BCWX.X-CC-Y/G | GaAsp/GaP | 590              | YELLOW        | DIFFUSED        | 30                         | 2      | 2.8 | 4        | 45                                | 3BC-Y/G |
|                  | GaP/GaP   | 568              | GREEN         |                 | 30                         | 2.1    | 2.8 | 6        |                                   |         |

|                                                                                                             |                          |                                                                                                                                                                 |                       |
|-------------------------------------------------------------------------------------------------------------|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| STANDARD TOLERANCE<br>( UNLESS OTHERWISE SPECIFIED )<br><u>±10% ALL VALUES</u><br><u>ANGULAR</u><br>X° ± 5° |                          | <br>4 THOMAS, IRVINE, CA. 92618<br>TEL: (949) 951-8808 FAX: (949) 951-3974 |                       |
|                        |                          | TITLE:<br>T-1 (3mm) PANEL MOUNT ASSEMBLY                                                                                                                        |                       |
| DESIGNED:<br><b>Dan Beckman</b>                                                                             | DATE:<br><b>04/09/07</b> | PART NO:<br>PM3XXXWX.X-CC                                                                                                                                       |                       |
| CHECKED:<br><b>T. Yin</b>                                                                                   | DATE:<br><b>04/09/07</b> | CAGE CODE : 32559                                                                                                                                               | REVISION:<br><b>F</b> |
|                                                                                                             |                          | SHEET # 2 OF 4                                                                                                                                                  |                       |
| CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING.                                                             |                          |                                                                                                                                                                 |                       |

| REV. | DESCRIPTION  | DATE | APPROVED |
|------|--------------|------|----------|
|      | SEE SHEET#1. |      |          |
|      |              |      |          |

| LED Assy.No.   | Chip          |                  |               | Lens Appearance | Electro-Optical Data @20mA |        |     |          | Viewing Angle<br>2 θ 1/2<br>(Deg) | LED P/N    |
|----------------|---------------|------------------|---------------|-----------------|----------------------------|--------|-----|----------|-----------------------------------|------------|
|                | Material      | Peak Wave Length | Emitted Color |                 | If (mA)                    | Vf (V) |     | Iv (mcd) |                                   |            |
|                |               |                  |               |                 |                            | MAX    | TYP |          |                                   |            |
| PM3UBWCWX.X-CC | GaN/SiC       | 470              | BLUE          | WATER CLEAR     | 30                         | 4      | 4.5 | 400      | 30                                | 3UBWC-0.6K |
| PM3SGCWX.X-CC  | GaP/GaP       | 568              | GREEN         | WATER CLEAR     | 30                         | 2.1    | 2.8 | 50       | 30                                | 3SGC-S     |
| PM3SGDWX.X-CC  | GaP/GaP       | 568              | GREEN         | DIFFUSED        | 30                         | 2.1    | 2.8 | 30       | 40                                | 3SGD-S     |
| PM3SGTWX.X-CC  | GaP/GaP       | 568              | GREEN         | TINTED          | 30                         | 2.1    | 2.8 | 50       | 30                                | 3SGT-S     |
| PM3SYCWX.X-CC  | GaAsp/GaP     | 590              | YELLOW        | WATER CLEAR     | 30                         | 2      | 2.8 | 50       | 30                                | 3SYC-S     |
| PM3SYDWX.X-CC  | GaAsp/GaP     | 590              | YELLOW        | DIFFUSED        | 30                         | 2      | 2.8 | 30       | 40                                | 3YD-S      |
| PM3SYTWX.X-CC  | GaAsp/GaP     | 590              | YELLOW        | TINTED          | 30                         | 2      | 2.8 | 50       | 30                                | 3SYT-S     |
| PM3SACWX.X-CC  | AlGaInP       | 605              | AMBER         | WATER CLEAR     | 30                         | 1.8    | 2.4 | 300      | 30                                | 3SAC-S     |
| PM3SADWX.X-CC  | AlGaInP       | 605              | AMBER         | DIFFUSED        | 30                         | 1.8    | 2.4 | 100      | 40                                | 3SAD-S     |
| PM3SATWX.X-CC  | AlGaInP       | 605              | AMBER         | TINTED          | 30                         | 1.8    | 2.4 | 300      | 30                                | 3SAT-S     |
| PM3SRCWX.X-CC  | GaAls/GaAs    | 645              | SUPER RED     | WATER CLEAR     | 30                         | 1.7    | 2.4 | 60       | 30                                | 3SRC-S     |
| PM3SRDWX.X-CC  | GaAls/GaAs    | 645              | SUPER RED     | DIFFUSED        | 30                         | 1.7    | 2.4 | 40       | 40                                | 3SRD-S     |
| PM3SRTWX.X-CC  | GaAls/GaAs    | 645              | SUPER RED     | TINTED          | 30                         | 1.7    | 2.4 | 60       | 30                                | 3SRT-S     |
| PM3UGCWX.X-CC  | AlGaInP       | 570              | GREEN         | WATER CLEAR     | 30                         | 2.1    | 2.4 | 200      | 30                                | 3UGC-S     |
| PM3SUGCWX.X-CC | AlGaInP       | 570              | GREEN         | WATER CLEAR     | 30                         | 2.1    | 2.4 | 300      | 30                                | 3SUGC-S    |
| PM3UYCWX.X-CC  | AlGaInP       | 590              | YELLOW        | WATER CLEAR     | 30                         | 2      | 2.4 | 300      | 30                                | 3UYC-S     |
| PM3SUYCWX.X-CC | AlGaInP       | 590              | YELLOW        | WATER CLEAR     | 30                         | 2      | 2.4 | 400      | 30                                | 3SUYC-S    |
| PM3UUYCWX.X-CC | AlGaInP       | 590              | YELLOW        | WATER CLEAR     | 30                         | 2      | 2.4 | 600      | 30                                | 3UUYC-S    |
| PM3UOCWX.X-CC  | AlGaInP       | 625              | ORANGE        | WATER CLEAR     | 30                         | 1.8    | 2.4 | 300      | 30                                | 3UOC-S     |
| PM3SUOCWX.X-CC | AlGaInP       | 625              | ORANGE        | WATER CLEAR     | 30                         | 1.8    | 2.4 | 400      | 30                                | 3SUOC-S    |
| PM3URCWX.X-CC  | GaAlAs/GaAs   | 645              | RED           | WATER CLEAR     | 30                         | 1.7    | 2.4 | 200      | 30                                | 3URC-S     |
| PM3SURCWX.X-CC | AlGaInP       | 640              | RED           | WATER CLEAR     | 30                         | 1.8    | 2.4 | 200      | 30                                | 3SURC-S    |
| PM3UWCWX.X-CC  | InGaN/Sappire | 6500K            | WHITE         | WATER CLEAR     | 30                         | 3.4    | 3   | 1000     | 30                                | 3UWC1.030C |

|                                                                                |                          |                                                                                       |  |                                                                                                                                                                 |  |
|--------------------------------------------------------------------------------|--------------------------|---------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| STANDARD TOLERANCE<br>( UNLESS OTHERWISE SPECIFIED )<br><u>±10% ALL VALUES</u> |                          | ANGULAR<br>X° ± 5°                                                                    |  | <br>4 THOMAS, IRVINE, CA. 92618<br>TEL: (949) 951-8808 FAX: (949) 951-3974 |  |
|                                                                                |                          |  |  | TITLE:<br>T-1 (3mm) PANEL MOUNT ASSEMBLY                                                                                                                        |  |
| DESIGNED:<br><b>Dan Beckman</b>                                                | DATE:<br><b>04/09/07</b> | PART NO:<br><b>PM3XXXWX.X-CC</b>                                                      |  | REVISION<br><b>F</b>                                                                                                                                            |  |
| CHECKED:<br><b>T. Yln</b>                                                      | DATE:<br><b>04/09/07</b> | CAGE CODE : <b>32559</b>                                                              |  | SHEET # 3 OF 4                                                                                                                                                  |  |
| CAD GENERATED DOCUMENT. DO NOT MEASURE DRAWING.                                |                          |                                                                                       |  |                                                                                                                                                                 |  |

| REV. | DESCRIPTION  | DATE | APPROVED |
|------|--------------|------|----------|
|      | SEE SHEET#1. |      |          |
|      |              |      |          |

| LED Assy.No.   | Chip        |                         |               | Lens Appearance | Absolute Max. Ratings |         |             | Electro-Optical Data @2mA |     |          | Viewing Angle 2 θ 1/2 (Deg) | LED P/N |
|----------------|-------------|-------------------------|---------------|-----------------|-----------------------|---------|-------------|---------------------------|-----|----------|-----------------------------|---------|
|                | Material    | Peak Wave Length λp(nm) | Emitted Color |                 | Pd (mW)               | If (mA) | Peak If(mA) | Vf (V)                    |     | Iv (mcd) |                             |         |
| PM3BWDLWX.X-CC | GaN/siC     | 430                     | BLUE          | DIFFUSED        | 20                    | 7       | -           | 3.8                       | 4.2 | 2.5      | 40                          | 3BWDL-S |
| PM3GDLWX.X-CC  | GaP/GaP     | 568                     | GREEN         | DIFFUSED        | 10                    | 7       | -           | 2.1                       | 2.6 | 2        | 40                          | 3GDL-S  |
| PM3PGDLWX.X-CC | GaP/GaP     | 555                     | PURE GREEN    | DIFFUSED        | 10                    | 7       | -           | 2.1                       | 2.6 | 0.2      | 40                          | 3PGDL-S |
| PM3YDLWX.X-CC  | GaP/GaP     | 590                     | YELLOW        | DIFFUSED        | 10                    | 7       | -           | 2                         | 2.6 | 2        | 40                          | 3YDL-S  |
| PM3ADLWX.X-CC  | GaP/GaP     | 605                     | AMBER         | DIFFUSED        | 10                    | 7       | -           | 2                         | 2.6 | 4        | 40                          | 3ADL-S  |
| PM3HDLWX.X-CC  | GaP/GaP     | 625                     | HE RED        | DIFFUSED        | 10                    | 7       | -           | 2                         | 2.6 | 2.5      | 40                          | 3HDL-S  |
| PM3RDLWX.X-CC  | GaP/GaP     | 700                     | RED           | DIFFUSED        | 10                    | 7       | -           | 2.1                       | 2.6 | 0.5      | 40                          | 3RDL-S  |
| PM3SRDLWX.X-CC | GaAlAs/GaAs | 645                     | RED           | DIFFUSED        | 10                    | 7       | -           | 2                         | -   | 8        | 40                          | 3SRDL-S |

| Assembly P/N    | Peak Wave Length<br>λp(nm) | Emitted Color | Lens Appearance | Electro-Optical Data |           |     |             | Viewing Angle<br>2 θ 1/2<br>(Deg) | LED P/N  |
|-----------------|----------------------------|---------------|-----------------|----------------------|-----------|-----|-------------|-----------------------------------|----------|
|                 |                            |               |                 | If<br>(mA)           | Vf<br>(V) |     | Iv<br>(mcd) |                                   |          |
|                 |                            |               |                 |                      | MAX       | TYP |             |                                   |          |
| 5 Volt          |                            |               |                 | Data @ 5V            |           |     |             |                                   |          |
| PM3BWD5VWX.X-CC | 430                        | BLUE          | DIFFUSED        | -                    | -         | 5   | 10          | 35                                | 3BWD5V-S |
| PM3GC5VWX.X-CC  | 568                        | GREEN         | WATER CLEAR     | -                    | -         | 5   | 40          | 20                                | 3GC5V-S  |
| PM3GD5VWX.X-CC  | 568                        | GREEN         | DIFFUSED        | -                    | -         | 5   | 25          | 35                                | 3GD5V-S  |
| PM3GT5VWX.X-CC  | 568                        | GREEN         | TINTED          | -                    | -         | 5   | 40          | 20                                | 3GT5V-S  |
| PM3AD5VWX.X-CC  | 605                        | AMBER         | DIFFUSED        | -                    | -         | 5   | 25          | 35                                | 3AD5V-S  |
| PM3HD5VWX.X-CC  | 625                        | HE RED        | DIFFUSED        | -                    | -         | 5   | 30          | 35                                | 3HD5V-S  |
| PM3RD5VWX.X-CC  | 700                        | RED           | DIFFUSED        | -                    | -         | 5   | 2           | 35                                | 3RD5V-S  |
| PM3YD5VWX.X-CC  | 590                        | YELLOW        | DIFFUSED        | -                    | -         | 5   | 20          | 35                                | 3YD5V-S  |
| 12 Volt         |                            |               |                 | Data @ 12V           |           |     |             |                                   |          |
| PM3GC12VWX.X-CC | 568                        | GREEN         | WATER CLEAR     | -                    | -         | 12  | 40          | 20                                | 3GC12V-S |
| PM3GD12VWX.X-CC | 568                        | GREEN         | DIFFUSED        | -                    | -         | 12  | 25          | 35                                | 2GD12V-S |
| PM3HC12VWX.X-CC | 625                        | HE RED        | WATER CLEAR     | -                    | -         | 12  | 50          | 20                                | 3HC12V-S |
| PM3HD12VWX.X-CC | 625                        | HE RED        | DIFFUSED        | -                    | -         | 12  | 30          | 35                                | 3HD12V-S |
| PM3RC12VWX.X-CC | 700                        | RED           | WATER CLEAR     | -                    | -         | 12  | 6           | 20                                | 3RC12V-S |
| PM3RD12VWX.X-CC | 700                        | RED           | DIFFUSED        | -                    | -         | 12  | 2           | 35                                | 3RD12V-S |
| PM3YC12VWX.X-CC | 590                        | YELLOW        | WATER CLEAR     | -                    | -         | 12  | 40          | 20                                | 3YC12V-S |
| PM3YD12VWX.X-CC | 590                        | YELLOW        | DIFFUSED        | -                    | -         | 12  | 25          | 35                                | 3YD12V-S |

|                                                                                |  |                                                                                       |  |                                                                                                                                                                 |  |
|--------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| STANDARD TOLERANCE<br>( UNLESS OTHERWISE SPECIFIED )<br><u>±10% ALL VALUES</u> |  | ANGULAR<br>X° ± 5°                                                                    |  | <br>4 THOMAS, IRVINE, CA. 92618<br>TEL: (949) 951-8808 FAX: (949) 951-3974 |  |
|                                                                                |  |  |  | TITLE:<br>T-1 (3mm) PANEL MOUNT ASSEMBLY                                                                                                                        |  |
| DESIGNED:<br><b>Dan Beckman</b>                                                |  | DATE:<br><b>04/09/07</b>                                                              |  | PART NO:<br>PM3XXXWX.X-CC                                                                                                                                       |  |
| CHECKED:<br><b>T. Yin</b>                                                      |  | DATE:<br><b>04/09/07</b>                                                              |  | REVISION:<br><b>F</b>                                                                                                                                           |  |
|                                                                                |  |                                                                                       |  | CAGE CODE : 32559 SHEET # 4 OF 4                                                                                                                                |  |
|                                                                                |  |                                                                                       |  | CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING.                                                                                                                 |  |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9