
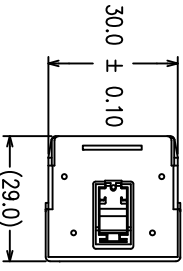


3M™ HIGH ROUTABILITY INTERNAL MINISAS CABLE ASSEMBLY, 8F68 SERIES


REVISION RECORD		
REV.	ECR/ECN/ECO NUMBER	DATE
A	ECO-0037298	04/11/11
B	ECO-0037543	18/11/11

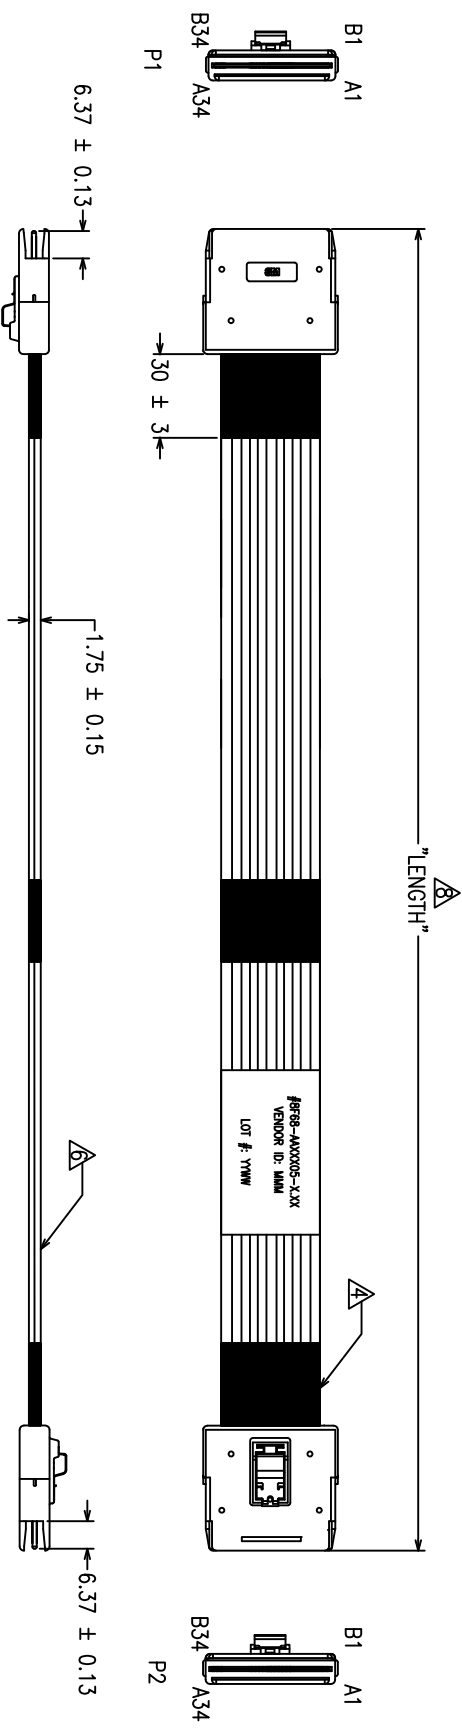

8 F 68 - AA X X 05 - X.XX

CABLE USED
 PINOUT (SEE PINOUTS ON SHEET 2)
 LENGTH IN METERS

G : 4-LANE WITH SIDEBANDS, SN-PLATED SIGNAL, CABLE P/N SL8801/12-21DA5-00
 J : 4-LANE WITH SIDEBANDS, AG-PLATED SIGNAL, CABLE P/N SL8801/12-20DA5-00
 * FOR CABLES WITHOUT SIDEBANDS OR OTHER CONFIGURATIONS, PLEASE CONTACT A 3M REPRESENTATIVE.

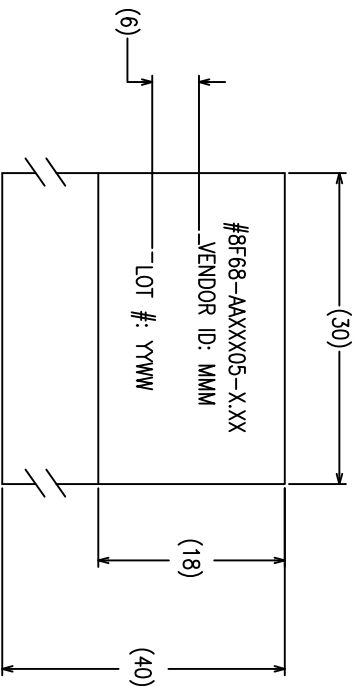

Visit <http://www.3Mconnector.com>

UNIT: MM	DFG	KOK HOE LEE	DATE	18/11/11	 APAC INNOVATION CENTRE	DIVISION	ESD	STATUS	RELEASED
GEN. TOLERANCES	CHKD	YUNIONG QIAO	DATE	18/11/11		MODEL			
LINEAR 0 = ±0.25 .00 = ±0.15 .000 = ±0.05	APPL	SAJUT BANDHU	DATE	18/11/11	TITLE CABLE ASSEMBLY INTERNAL 68P MINISAS RIBBON TWINAX				
ANGLE ±1°	THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO 3M AND IS UNCLASSIFIED OR IN PART SHALL BE MADE WITHOUT AUTHORIZATION FROM 3M.				SIZE	DRAWING NO.	78-5100-2450-4	REV	B
PROJECTION	INTERPRET PER ASME Y14.5M-1994				SCALE	NTS	DET LST	<input type="checkbox"/> YES <input type="checkbox"/> NO	SHT 1 of 2
CRITICAL DIMENSION: ▲									

3M™ HIGH ROUTABILITY INTERNAL MINISAS CABLE ASSEMBLY, 8F68 SERIES

REVISION RECORD	
REV.	ECR/EGN/ECO NUMBER DATE
	REFER TO SH1 1 OF 2

BACKPLANE-TO-CONTROLLER
PINOUT 1

P1	P2	P1	P2
A1 GND	B1 GND	B1 GND	A1 GND
A2 R _x 0+	B2 I _x 0+	B2 I _x 0+	A2 R _x 0+
A3 R _x 0-	B3 I _x 0-	B3 I _x 0-	A3 R _x 0-
A4 GND	B4 GND	B4 GND	A4 GND
A5 R _x 1+	B5 I _x 1+	B5 I _x 1+	A5 R _x 1+
A6 R _x 1-	B6 I _x 1-	B6 I _x 1-	A6 R _x 1-
A7 GND	B7 GND	B7 GND	A7 GND
A8 R _x 2+	B8 I _x 2+	B8 I _x 2+	A8 R _x 2+
A9 R _x 2-	B9 I _x 2-	B9 I _x 2-	A9 R _x 2-
A10 GND	B10 GND	B10 GND	A10 GND
A11 R _x 3+	B11 I _x 3+	B11 I _x 3+	A11 R _x 3+
A12 R _x 3-	B12 I _x 3-	B12 I _x 3-	A12 R _x 3-
A13 GND	B13 GND	B13 GND	A13 GND
A14 SIDEBAND	B14 SIDEBAND	B14 SIDEBAND	A14 SIDEBAND
A15 SIDEBAND	B15 SIDEBAND	B15 SIDEBAND	A15 SIDEBAND
A16 SIDEBAND	B16 SIDEBAND	B16 SIDEBAND	A16 SIDEBAND
A17 SIDEBAND	B17 SIDEBAND	B17 SIDEBAND	A17 SIDEBAND
A18 SIDEBAND	B18 SIDEBAND	B18 SIDEBAND	A18 SIDEBAND
A19 SIDEBAND	B19 SIDEBAND	B19 SIDEBAND	A19 SIDEBAND
A20 SIDEBAND	B20 SIDEBAND	B20 SIDEBAND	A20 SIDEBAND
A21 SIDEBAND	B21 SIDEBAND	B21 SIDEBAND	A21 SIDEBAND
A22 GND	B22 GND	B22 GND	A22 GND
A23 R _x 4+	B23 I _x 4+	B23 I _x 4+	A23 R _x 4+
A24 R _x 4-	B24 I _x 4-	B24 I _x 4-	A24 R _x 4-
A25 GND	B25 GND	B25 GND	A25 GND
A26 R _x 5+	B26 I _x 5+	B26 I _x 5+	A26 R _x 5+
A27 R _x 5-	B27 I _x 5-	B27 I _x 5-	A27 R _x 5-
A28 GND	B28 GND	B28 GND	A28 GND
A29 R _x 6+	B29 I _x 6+	B29 I _x 6+	A29 R _x 6+
A30 R _x 6-	B30 I _x 6-	B30 I _x 6-	A30 R _x 6-
A31 GND	B31 GND	B31 GND	A31 GND
A32 R _x 7+	B32 I _x 7+	B32 I _x 7+	A32 R _x 7+
A33 R _x 7-	B33 I _x 7-	B33 I _x 7-	A33 R _x 7-
A34 GND	B34 GND	B34 GND	A34 GND

BACKPLANE-TO-CONTROLLER (NO SIDEBANDS)
PINOUT 3

P1	P2	P1	P2
A1 GND	B1 GND	B1 GND	A1 GND
A2 R _x 0+	B2 I _x 0+	B2 I _x 0+	A2 R _x 0+
A3 R _x 0-	B3 I _x 0-	B3 I _x 0-	A3 R _x 0-
A4 GND	B4 GND	B4 GND	A4 GND
A5 R _x 1+	B5 I _x 1+	B5 I _x 1+	A5 R _x 1+
A6 R _x 1-	B6 I _x 1-	B6 I _x 1-	A6 R _x 1-
A7 GND	B7 GND	B7 GND	A7 GND
A8 R _x 2+	B8 I _x 2+	B8 I _x 2+	A8 R _x 2+
A9 R _x 2-	B9 I _x 2-	B9 I _x 2-	A9 R _x 2-
A10 GND	B10 GND	B10 GND	A10 GND
A11 R _x 3+	B11 I _x 3+	B11 I _x 3+	A11 R _x 3+
A12 R _x 3-	B12 I _x 3-	B12 I _x 3-	A12 R _x 3-
A13 GND	B13 GND	B13 GND	A13 GND
A14 SIDEBAND	B14 SIDEBAND	B14 SIDEBAND	A14 SIDEBAND
A15 SIDEBAND	B15 SIDEBAND	B15 SIDEBAND	A15 SIDEBAND
A16 SIDEBAND	B16 SIDEBAND	B16 SIDEBAND	A16 SIDEBAND
A17 SIDEBAND	B17 SIDEBAND	B17 SIDEBAND	A17 SIDEBAND
A18 SIDEBAND	B18 SIDEBAND	B18 SIDEBAND	A18 SIDEBAND
A19 SIDEBAND	B19 SIDEBAND	B19 SIDEBAND	A19 SIDEBAND
A20 SIDEBAND	B20 SIDEBAND	B20 SIDEBAND	A20 SIDEBAND
A21 SIDEBAND	B21 SIDEBAND	B21 SIDEBAND	A21 SIDEBAND
A22 GND	B22 GND	B22 GND	A22 GND
A23 R _x 4+	B23 I _x 4+	B23 I _x 4+	A23 R _x 4+
A24 R _x 4-	B24 I _x 4-	B24 I _x 4-	A24 R _x 4-
A25 GND	B25 GND	B25 GND	A25 GND
A26 R _x 5+	B26 I _x 5+	B26 I _x 5+	A26 R _x 5+
A27 R _x 5-	B27 I _x 5-	B27 I _x 5-	A27 R _x 5-
A28 GND	B28 GND	B28 GND	A28 GND
A29 R _x 6+	B29 I _x 6+	B29 I _x 6+	A29 R _x 6+
A30 R _x 6-	B30 I _x 6-	B30 I _x 6-	A30 R _x 6-
A31 GND	B31 GND	B31 GND	A31 GND
A32 R _x 7+	B32 I _x 7+	B32 I _x 7+	A32 R _x 7+
A33 R _x 7-	B33 I _x 7-	B33 I _x 7-	A33 R _x 7-
A34 GND	B34 GND	B34 GND	A34 GND

- NOTES:
- A1, A4, A7, A10, A13, A22, A25, A28, A29, A31, A34, B1, B4, B7, B10, B13, B22, B25, B28, B31 AND B34 ARE ALL REFERENCE GROUNDS AND ARE SHORTED TOGETHER THROUGH THE PADDELCARD GROUND PLANES.
 - A14-A21 AND B14-B21 HAVE NO CONNECTIONS TO CABLE.

- NOTE:
- A1, A4, A7, A10, A13, A22, A25, A28, A31, A34, B1, B4, B7, B10, B13, B22, B25, B28, B31 AND B34 ARE ALL REFERENCE GROUNDS AND ARE SHORTED TOGETHER THROUGH THE PADDELCARD GROUND PLANES.

- NOTES:
- ROHS COMPLIANT. SEE REGULATORY INFORMATION APPENDIX IN "ROHS COMPLIANCE" SECTION AT WWW.3M.COM/INTERCONNECT (E1 & C1 APPLY)
 - PADDELCARD PLATING: 30U" MIN. GOLD PLATING
50U" MIN. NICKEL UNDERPLATING
 - MINISAS CABLE PLUG DIMENSIONS SHALL CONFORM WITH SFF-8086 AND SFF-8087 STANDARDS.
MEETS SFF-8086 STANDARD, ELECTRICAL VOLTAGE: 30V /CONTACT
- △ CLOTH TAPE WRAPPED AROUND CABLE RIBBONS AT BACK OF EACH CONNECTOR. ALSO, UP TO 2 ADDITIONAL TAPE PIECES WILL BE WRAPPED AROUND THE TWO CABLE RIBBONS SPACED EQUIDISTANT FROM THE CONNECTOR ENDS, AND EACH OTHER, DEPENDING ON ASSY LENGTH A:
- A <= 200MM NO ADDITIONAL TAPE
200MM < A <= 600MM 1 TAPE WRAP
600MM < A <= 1000MM 2 TAPE WRAPS
- ▽ 5. PRODUCT DATA SHEET: 78-5102-0113-6
- △ FOUR RIBBONS OF 3M RIBBON TWIN AXIAL CABLE
7. THIS UNIQUE CABLE CONSTRUCTION HAS A THIN ALUMINUM INNER LAYER EXPOSED AT EACH EDGE. USERS SHOULD ASSESS WHETHER THE EXPOSED EDGE PRESENTS A SHORTING RISK IN THEIR SPECIFIC APPLICATION. INSULATING TAPE MAY BE APPLIED AT THE CABLE ASSEMBLY LEVEL, AS NEEDED, TO COVER THIS EXPOSED EDGE IN RISK AREAS.
- △ LENGTH TOLERANCE:
± 10MM FOR LENGTH <=0.5 METER
± 15MM FOR LENGTH >0.5 METER

Visit <http://www.3Mconnector.com>

UNIT: MM	DFLG	KOK HOE LEE	DATE	18/11/11
GEN. TOLERANCES	CHKD	YUNLONG QIAO	DATE	18/11/11
LINER 0 = ±0.25 .00 = ±0.15 .000 = ±0.05	APPL	SAJIT BANDHU	DATE	18/11/11
ANGLE ±1°	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND IS UNCLASSIFIED AND RELEASED UNDER THE NATIONAL ARCHIVES OR IN PART, SHALL BE MADE WITHOUT AUTHORIZATION FROM 3M.			
PROJECTION	INTERPRET PER ASME Y14.5M-1994			
CRITICAL DIMENSION: ▲				
SCALE: NTS	TITLE		DIVISION	
	CABLE ASSEMBLY		ESD	
	INTERNAL 68P MINISAS RIBBON TWINAX		MODEL	
	78-5100-2450-4		RELEASED	
	DET LST	YES	NO	REV
				B
				SH1 2 OF 2

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9