

SURFACE-MOUNT FUSES

Pulse Tolerant Chip Fuses

Pulse Tolerant Chip Fuses have high inrush current withstand capability and provide overcurrent protection for DC power systems. These devices combine a silver fusing element and monolithic, multilayer design to provide strong arc suppression characteristics.

These RoHS-compliant surface-mount devices can help facilitate the development of more reliable, high-performance consumer electronics such as laptops, multimedia devices, cell phones and other portable electronics.



BENEFITS

- High inrush current withstanding capability
- Ceramic monolithic structure
- Silver fusing element and silver termination with nickel and tin plating
- Temperature stability
- Strong arc suppression characteristics

FEATURES

- Lead free materials and RoHS compliant
- Halogen free
(refers to: Br≤900ppm, Cl≤900ppm, Br+Cl≤1500ppm)
- Monolithic, multilayer design
- High-temperature performance
- -55°C to +125°C operating temperature range

APPLICATIONS

- Laptops
- Digital cameras
- Cell phones
- Printers
- DVD players
- Portable electronics
- Game systems
- LCD monitors
- Scanners

Surface Mount Fuses

Pulse Tolerant Chip Fuses


Table FP1 – ClearTime Characteristics

| % of Rated Current | | Clear Time at 25°C | |
|--------------------|--|--------------------|--------------|
| 100% | | 4 hrs (min) | — |
| 200% | | 1 s (min) | 60 s (max) |
| 1000% | | 0.0002 s (min) | 0.02 s (max) |

Table FP2 – Typical Electrical Characteristics and Dimensions

0603 (1608 mm) Pulse Tolerant Chip Fuses

Shape and Dimensions
mm (in)




| | A | | B | | C | | D | |
|----|---------|---------|---------|---------|---------|---------|---------|---------|
| | Min | Max | Min | Max | Min | Max | Min | Max |
| mm | 1.45 | 1.75 | 0.65 | 0.95 | 0.21 | 0.51 | 0.65 | 0.95 |
| in | (0.057) | (0.069) | (0.026) | (0.037) | (0.008) | (0.020) | (0.026) | (0.037) |

| Part Number | Typical Electrical Characteristics | | | Max Interrupt Ratings | |
|------------------|------------------------------------|-----------------------|--|----------------------------|-------------|
| | Rated Current (A) | Nominal Cold DCR (Ω)* | Nominal I ² t (A ² sec) [†] | Voltage (V _{DC}) | Current (A) |
| 0603SFP100F/32-2 | 1.0 | 0.210 | 0.08 | 32 | 50 |
| 0603SFP150F/32-2 | 1.5 | 0.101 | 0.11 | 32 | 50 |
| 0603SFP200F/32-2 | 2.0 | 0.057 | 0.24 | 32 | 50 |
| 0603SFP250F/32-2 | 2.5 | 0.042 | 0.56 | 32 | 50 |
| 0603SFP300F/32-2 | 3.0 | 0.030 | 0.72 | 32 | 50 |
| 0603SFP350F/32-2 | 3.5 | 0.022 | 1.10 | 32 | 50 |
| 0603SFP400F/32-2 | 4.0 | 0.018 | 2.08 | 32 | 50 |
| 0603SFP450F/32-2 | 4.5 | 0.014 | 2.63 | 32 | 50 |
| 0603SFP500F/32-2 | 5.0 | 0.013 | 3.25 | 32 | 50 |
| 0603SFP600F/32-2 | 6.0 | 0.010 | 4.00 | 32 | 70 |

1206 (3216 mm) Pulse Tolerant Chip Fuses

Shape and Dimensions
mm (in)

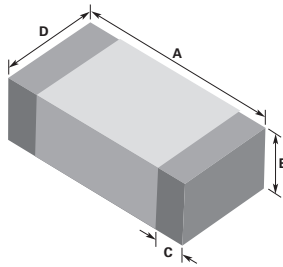

| | A | | B | | C | | D | |
|----|---------|---------|---------|---------|---------|---------|---------|---------|
| | Min | Max | Min | Max | Min | Max | Min | Max |
| mm | 3.00 | 3.40 | 0.77 | 1.17 | 0.26 | 0.76 | 1.40 | 1.80 |
| in | (0.118) | (0.134) | (0.030) | (0.046) | (0.010) | (0.030) | (0.055) | (0.071) |

| Part Number | Typical Electrical Characteristics | | | Max Interrupt Ratings | |
|------------------|------------------------------------|-----------------------|--|----------------------------|-------------|
| | Rated Current (A) | Nominal Cold DCR (Ω)* | Nominal I ² t (A ² sec) [†] | Voltage (V _{DC}) | Current (A) |
| 1206SFP100F/63-2 | 1.0 | 0.340 | 0.11 | 63 | 50 |
| 1206SFP150F/63-2 | 1.5 | 0.150 | 0.33 | 63 | 50 |
| 1206SFP200F/63-2 | 2.0 | 0.090 | 0.80 | 63 | 50 |
| 1206SFP250F/32-2 | 2.5 | 0.070 | 1.19 | 32 | 50 |
| 1206SFP300F/32-2 | 3.0 | 0.035 | 1.35 | 32 | 50 |
| 1206SFP350F/32-2 | 3.5 | 0.029 | 1.84 | 32 | 50 |
| 1206SFP400F/32-2 | 4.0 | 0.023 | 2.74 | 32 | 50 |
| 1206SFP450F/32-2 | 4.5 | 0.021 | 3.20 | 32 | 50 |
| 1206SFP500F/32-2 | 5.0 | 0.017 | 5.50 | 32 | 50 |
| 1206SFP600F/24-2 | 6.0 | 0.013 | 12.50 | 24 | 80 |
| 1206SFP700F/24-2 | 7.0 | 0.010 | 30.00 | 24 | 80 |
| 1206SFP800F/24-2 | 8.0 | 0.009 | 60.00 | 24 | 80 |

* Measured at ≤10% of rated current and 25°C ambient temperature.
[†] Melting I²t at 0.001 sec clear time.

Surface Mount Fuses

Pulse Tolerant Chip Fuses

Figures FP1-FP4 – Family Performance Curves

Figure FP1


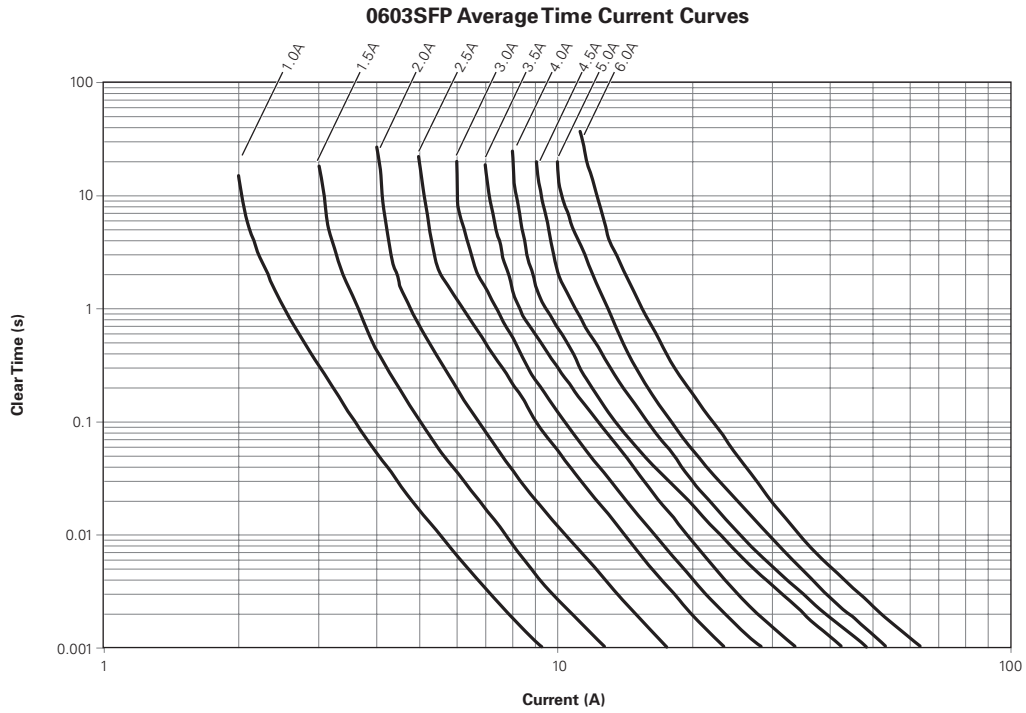


Figure FP2

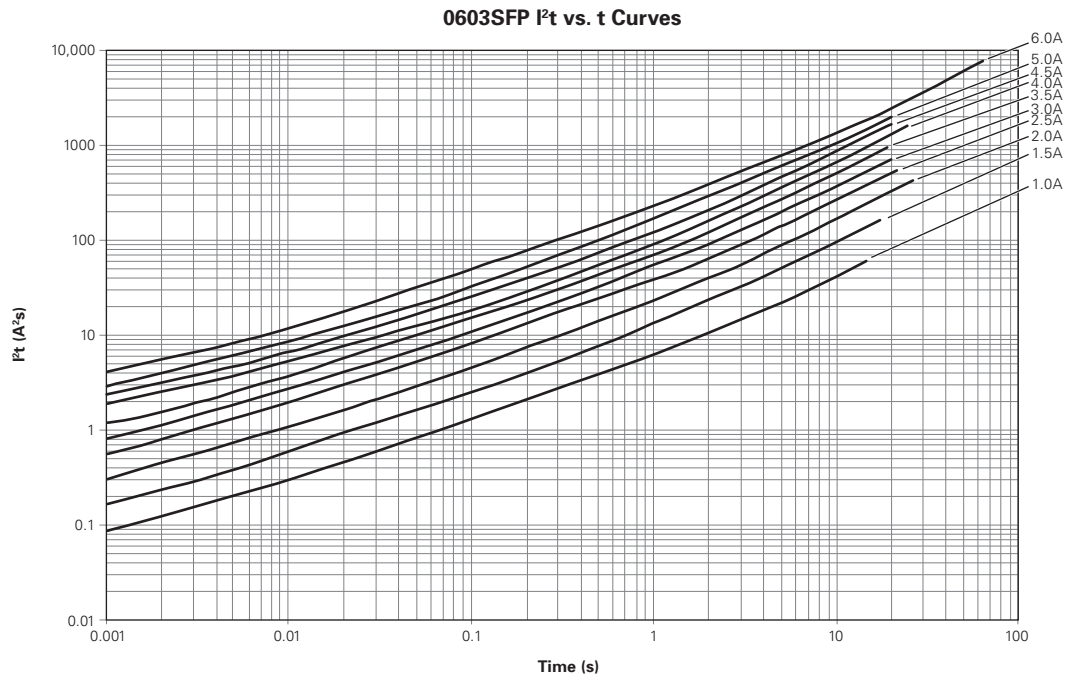

Surface Mount Fuses

Pulse Tolerant Chip Fuses

Figures FP1-FP4 — Family Performance Curves

(Cont'd)

Figure FP3


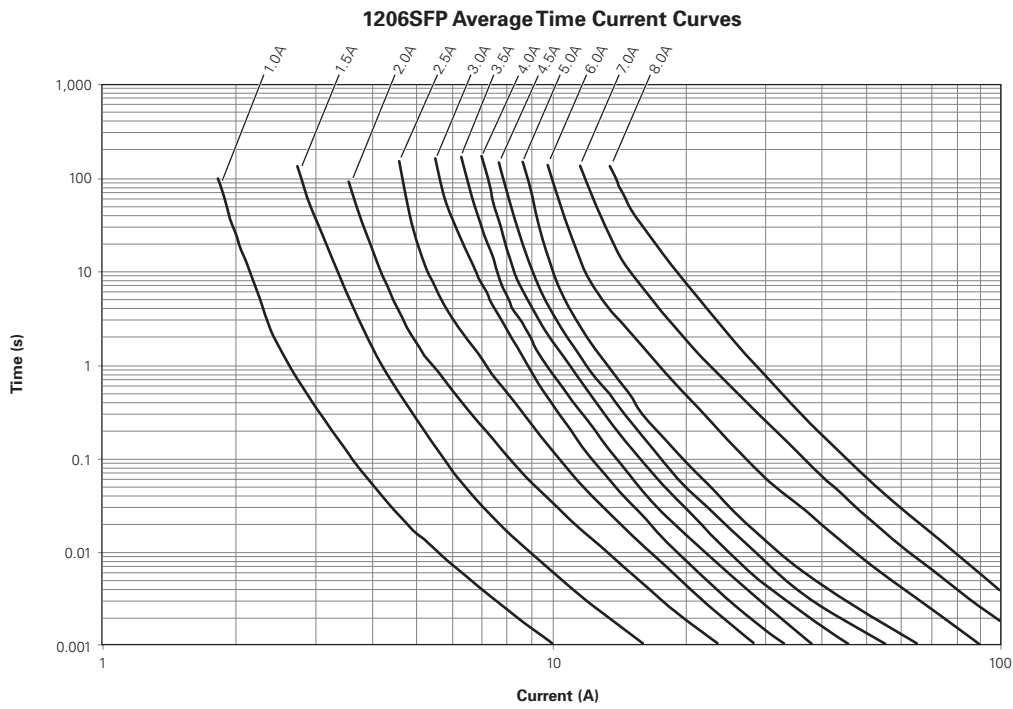


Figure FP4

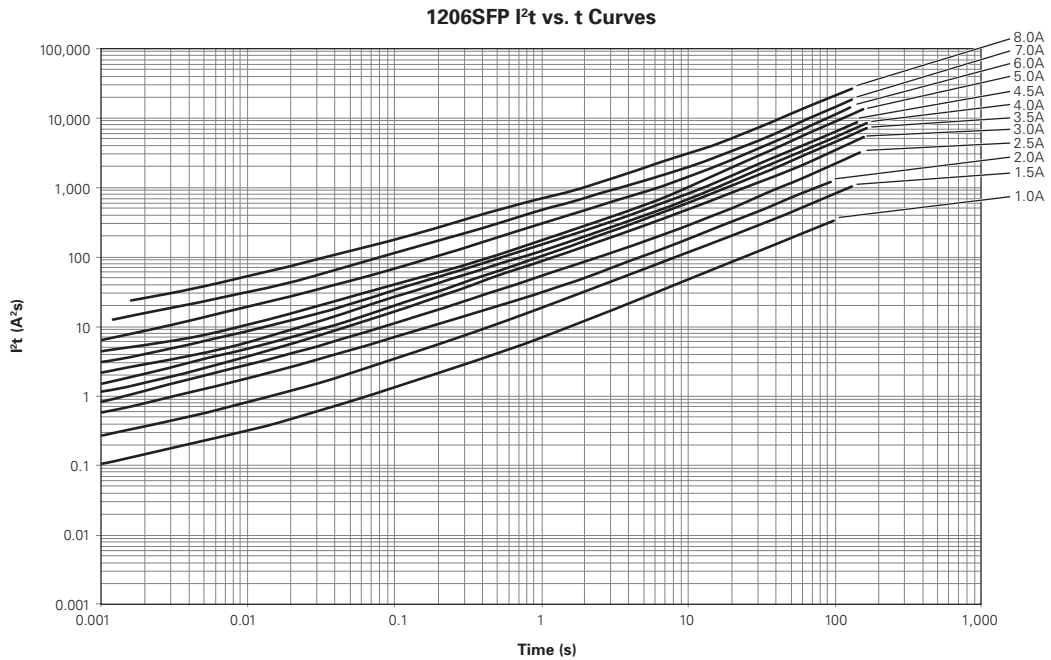

Note: Curves are nominal.

Surface Mount Fuses

Pulse Tolerant Chip Fuses

Notice:

Littelfuse products are not designed for, and shall not be used for, any purpose (including, without limitation, automotive, military, aerospace, medical, life-saving, life-sustaining or nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable Littelfuse product documentation. Warranties granted by Littelfuse shall be deemed void for products used for any purpose not expressly set forth in applicable Littelfuse documentation. Littelfuse shall not be liable for any claims or damages arising out of products used in applications not expressly intended by Littelfuse as set forth in applicable Littelfuse documentation. The sale and use of Littelfuse products is subject to Littelfuse Terms and Conditions of Sale, unless otherwise agreed by Littelfuse.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9