



ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

AC/DC SWITCHING DESKTOP ADAPTER
POWER SUPPLY WITH PFC
SINGLE OUTPUT / UNIVERSAL RANGE INPUT
80 WATTS

DTC80-SX-W6 Series



Dimension: L132.0×W69.0×H40.0mm



General Description

Features

1. High Reliability
2. Meets CEC, CoC, EISA, RoHS, and DoE requirements
3. Over voltage protection
4. Short circuit protection
5. Over load protection
6. Meets UL, CSA, TUV, IEC60950-1 standards
7. 100% burn-in test at max load under 35~45 centigrade
8. Meets Energy Star level 6 requirements

Input	
Input Voltage Range:	90-264VAC
Frequency:	47-63Hz
Input Current (rms) :	2.0A @ 90Vac max
Inrush current:	150A at 230VAC max at cold start
Power Factor:	>0.9 (115VAC100%Load)
Efficiency :	>88% @ full load, 115VAC

Output Characteristic	Unit	DTC80-12SX-W6	DTC80-15SX-W6	DTC80-18SX-W6	DTC80-24SX-W6	DTC80-28SX-W6	DTC80-48SX-W6
		12	15	18	24	28	48
Output Voltage	Vdc	12	15	18	24	28	48
Output Current	A	6.67	5.34	4.45	3.34	2.86	1.67
Output Power	W	80					
O/P Regulation	%	±5%					
Ripple & Noise (Vp-p) *	mVp-p	<240mVpp					
Hold-up time	mS	>20ms typical at full load @ 115VAC					

* Peak-to-peak with 20MHz bandwidth with a tantalum 10uF in parallel with a 0.1uF ceramic capacitor.



ETA USA



ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

Dielectric withstand	
Primary-Secondary	4242VDC for 4 sec
Primary-Frame Ground	2121VDC for 4 sec
Insulation Resistance	
Primary-Secondary	20MOhm min 500VDC
Primary-Frame Ground	20MOhm min 500VDC
Environmental Specification	
Operating Temperature	0 to +60°C (derate linearly by 2.5% / °C from 41°C to 60°C)
Storage Temperature	-10 to +85°C
Storage Humidity	10~90% RH non-condensing
MTBF demonstrated	>120,000 hours at full load and 25 °C ambient temperature
Temperature Coefficient	0.05%/°C max
Environmental Agencies	
Safety Standards	UL 60950 -1 CSA 22.2-No.60950-1 TUV EN60950-1 CB IEC 60950-1
EMC Standards	EN55022 Class B, EN55024 Class B, FCC Class B
Protection	
Short circuit protection	Auto Recover
Over Load Protection	Auto Recover
Over Voltage Protection	LATCH AC Recycle after 110~130% of rated output
Overshoot at turn on/turn off	Any overshoots should be less than 5% of voltage regulation tolerance. No voltage of opposite polarity shall be present on any output during turn-on or turn-off.
Mechanical	
Dimension [mm]: L132.0×W69.0×H40.0mm	
AC Input : IEC 320-C14	
Output connector: As specified by customer	






ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

DIMENSION DIAGRAM (mm)

Note :


1. AC INLET : IEC320-C14 STANDARD
2. BOX COLOR : BLACK
3. TOLERANCE : $\pm 0.5\text{mm}$
4. UNIT : mm

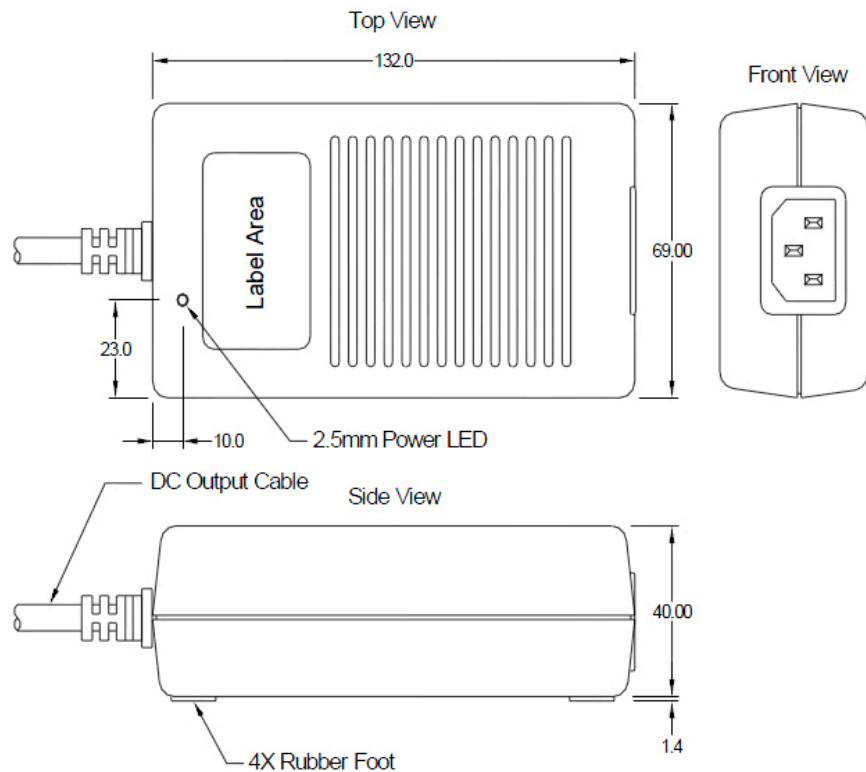







ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

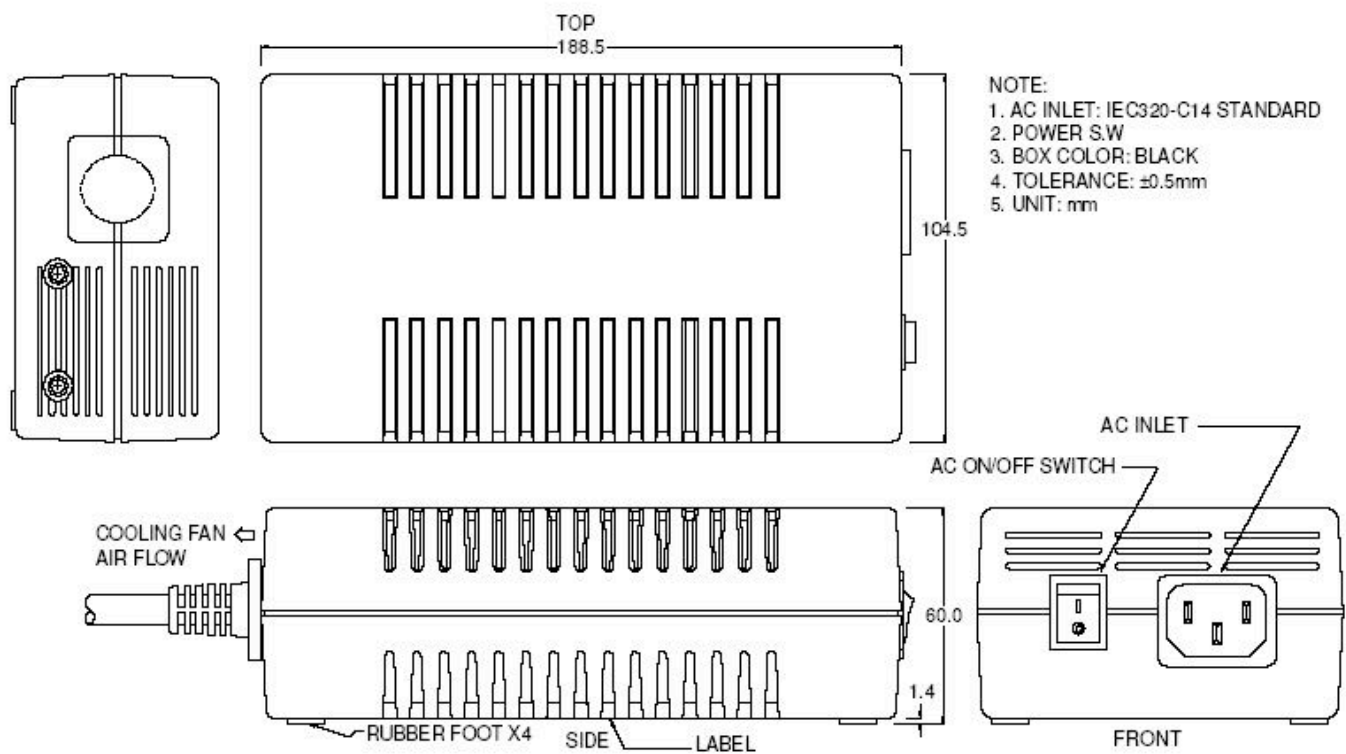

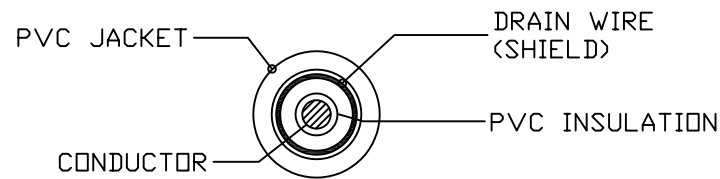

[1571#14AWG 1C+1]
SECTIONAL DRAWING

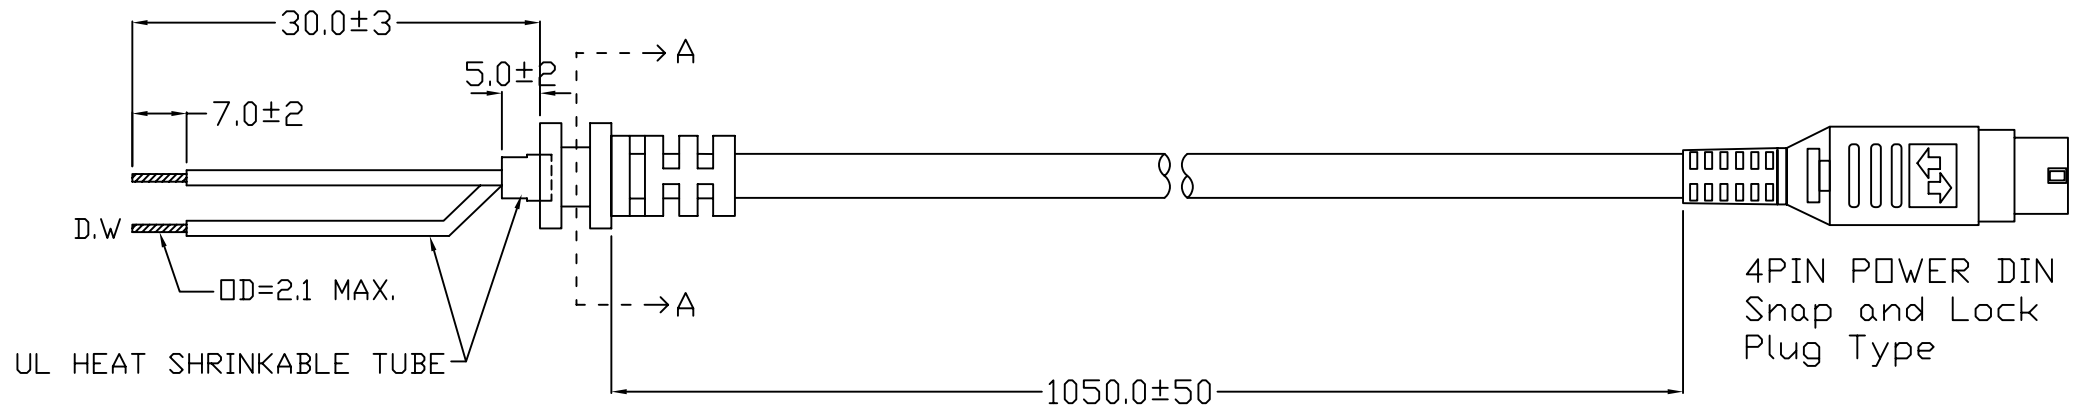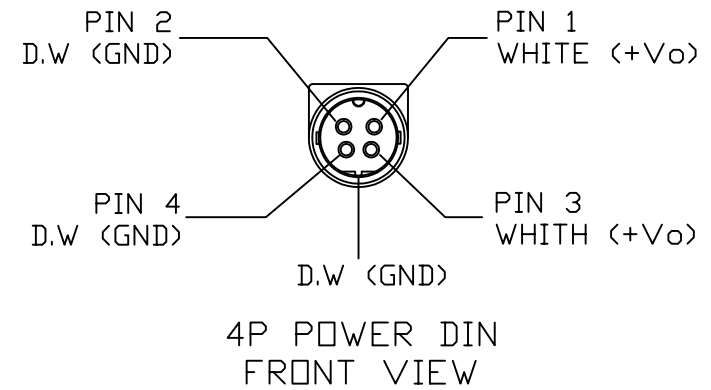

S.R: AD-A1 SERIES

SECTION A-A

[包裝方式]






ETA-USA


16170 Vineyard Blvd. Suite 180
Morgan Hill, CA 95037

COMPONENT LIST

- 1.CABLE : COLOR BLACK UL/CSA 1571 80/90°C 30V
14AWGX1C + DRAIN WIRE
- 2.PVC WIRES : COLOR : BLACK / WHITE
- DTC80-12SX-W6
- DTC80-15SX-W6
- DTC80-18SX-W6
- D0972A

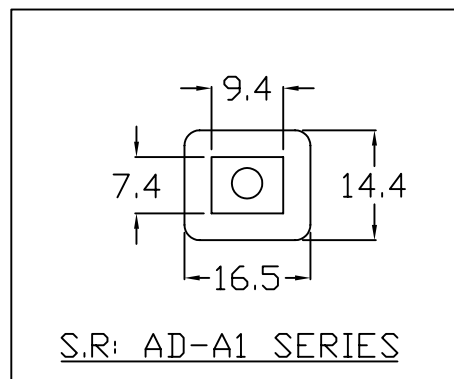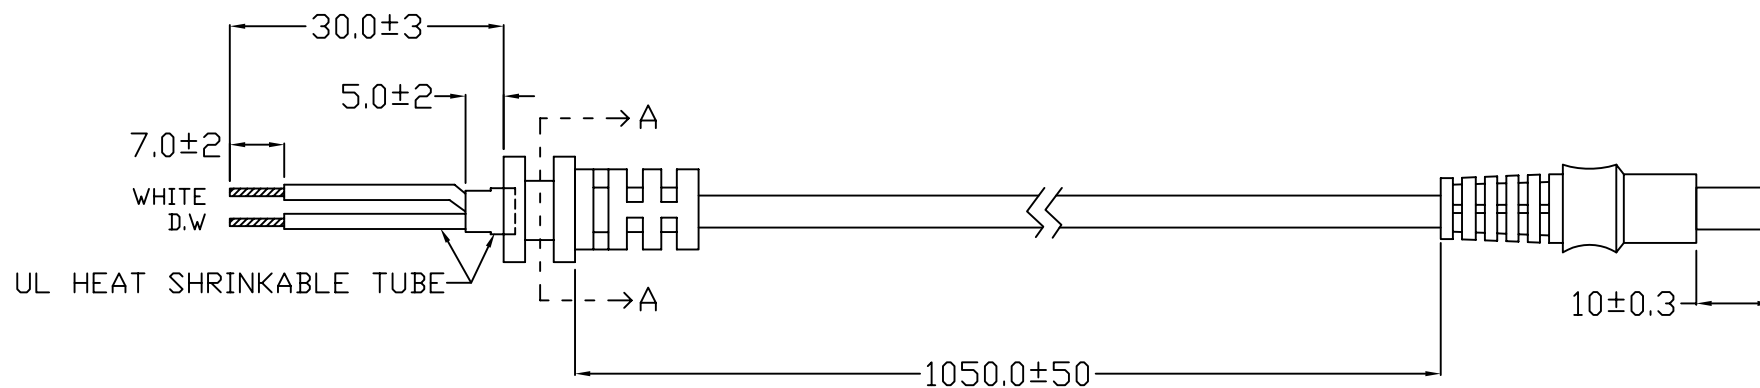

SECTION A-A

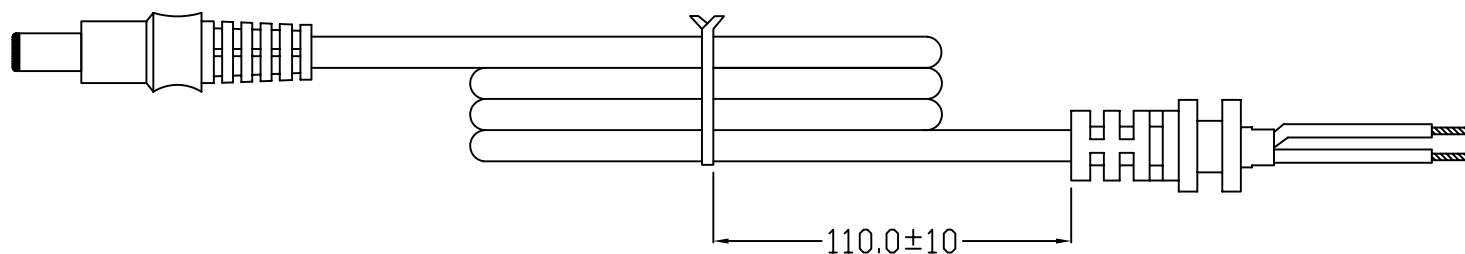

[包裝方式]



COMPONENT LIST

1.CABLE:COLOR BLACK UL/CSA 1185 80/90°C 300V
16AWGX1C+SHIELD

DTC80-24SX-W6
DTC80-48SX-W6
DO973A

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9