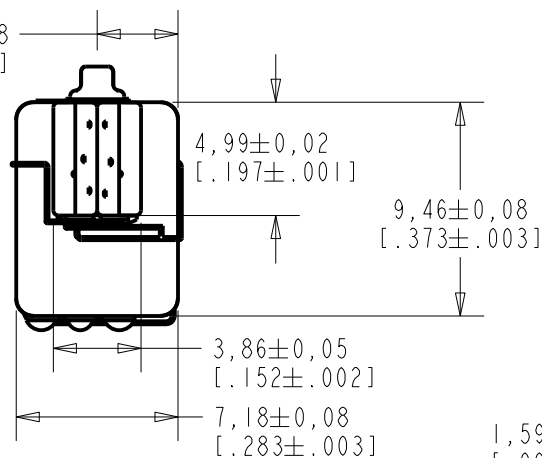


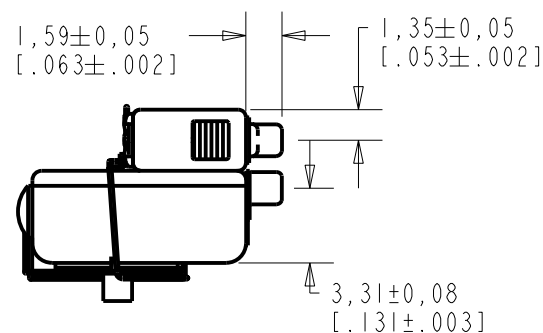
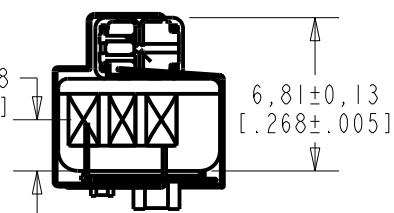


GK-31732-000

SHT 1.1

 $3,61 \pm 0,08$
 $[.142 \pm .003]$


NOTES:

A POSITIVE GOING VOLTAGE AT THE POSITIVE TERMINAL RELATIVE TO THE NEGATIVE TERMINAL CAUSES A DECREASE IN PRESSURE AT THE SOUND OUTLETS.

 $2,25 \pm 0,08$
 $[.089 \pm .003]$

 $\varnothing 1,41 \pm 0,05$
 $[.056 \pm .002]$
TERMINAL
POSITIVE
 $1,02 \pm 0,10$
 $[.040 \pm .004]$
TERMINAL
NEGATIVE
 $1,36 \pm 0,10$
 $[.054 \pm .004]$


SCALE 2:1

NOMINAL WEIGHT
1.26 GRAM

DIMENSIONS IN MILLIMETERS [INCHES]

KNOWLES ELECTRONICS
 ITASCA, ILLINOIS U.S.A.

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
			Active	A
A	C40101062	8-2-12		
SCALE: 3:1			DR. BY	
DO NOT SCALE DRAWING			LW	8-2-12
TITLE: RECEIVER OUTLINE DRAWING			CK. BY	DATE
			GJP	8-23-12
			APP. BY	DATE
			GJP	8-23-12
GK-31732-000				
SHT 1.1				

KE111ASIZE.FRM

Rev: B

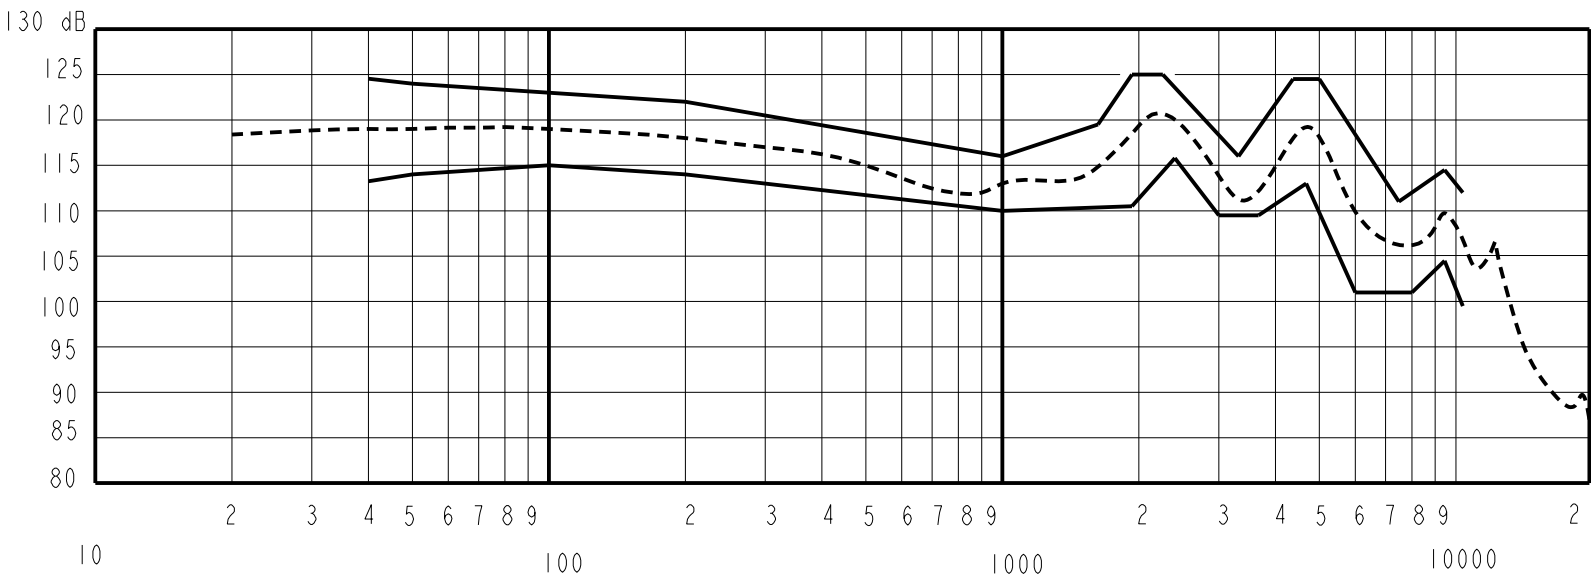
UNDAMPED MAGNETIC BALANCED RECEIVERS INTENDED FOR USE AS THE HIGH AND LOW FREQUENCY DRIVERS IN A HI-FI SYSTEM. THE GK RECEIVER COMBINES A TWFK AND CI RECEIVERS, COUPLED THROUGH A CIRCUIT TO PROVIDE THE RESPONSE SHAPE.

NO DAMPING

CK-31732-000
SHEET 2.1

SENSITIVITY IN dB RELATIVE TO 20μPa FOR
CONDITIONS SHOWN BLEW

CONSTANT VOLTAGE DRIVE CONDITIONS (WITH VENT BLOCKED).



ACOUSTICAL

FREQUENCY IN HERTZ

SENSITIVITY
DEVICE WILL PRODUCE THE SPL LISTED BELOW UNDER TEST CONDITION IN TABLE 3.
NOMINAL SENSITIVITY AT 1kHz IS dB RELATIVE TO 20 μPa. ALL OTHER VALUES
IN dB RELATIVE TO THE SENSITIVITY AT 1kHz.

FREQUENCY (Hz)	MINIMUM	NOMINAL	MAXIMUM
50	+1.0	+6.0	+11.0
100	+2.0	+6.0	+10.0
200	+1.0	+5.0	+9.0
1000	-3.0	113.0	+3.0
1700	---	---	+6.5
1950	-2.5	+5.5	+12.0
2300	+2.8	---	---
2450	---	---	+12.0
3000	-5.5	---	---
3350	---	---	+3.0
3700	-5.5	---	---
4400	---	---	+11.5
4700	+0.0	---	---
5000	---	---	+11.5
6000	-12.0	---	---
7500	---	---	-2.0
8000	-12.0	---	---
9750	-8.5	---	+1.5
10500	-13.5	---	-1.0

TABLE 1

TOTAL HARMONIC DISTORTION
DEVICE WILL NOT EXCEED TOTAL HARMONIC DISTORTION LEVELS LISTED BELOW.

FREQUENCY (Hz)	AC DRIVE (V rms)	DC BIAS (mA)	LIMIT (%)
20-8000	0.13	0	4

TABLE 2

TEST CONDITIONS

NOMINAL SOURCE VOLTAGE	0.13 V rms, 0mA DC BIAS
SOURCE IMPEDANCE	<1 Ohm
TUBING	TUBELESS
COUPLER CAVITY	IEC 60318-4

TABLE 3

ELECTRICAL

DC RESISTANCE	24.1 Ohms ± 10%
IMPEDANCE @ 500 Hz	23.0 Ohms ± 20%
IMPEDANCE @ 1kHz	12.0 Ohms ± 20%

TABLE 4

ISOLATION: CASE WILL BE ELECTRICALLY ISOLATED FROM THE COIL CIRCUIT.

MECHANICAL

PORT LOCATION: 12S
SOLDER TYPE: SAC305 (LEAD FREE)

TEMPERATURE:
OPERATING: SENSITIVITY AT 1kHz WILL NOT VARY
BY MORE THAN +1/-3 dB FROM
0°C TO 63°C
STORAGE: -40°C TO 63°C

KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.

Revision	C.O. #	Implementation Date	RELEASE LEVEL		REVISION
			Active		A
A	C40101062	8-2-12			
WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION			DR. BY	DATE	
			LW	8-2-12	
			CK. BY	DATE	
			GJP	8-23-12	
			APP. BY	DATE	
			GJP	8-23-12	

TITLE: RECEIVER
PERFORMANCE SPECIFICATION

CK-31732-000
SHT 2.1

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9