



Electronically Programmable Voltage Reference

DS4303

General Description

The DS4303 is a nonvolatile (NV) electronically programmable voltage reference. The reference voltage is programmed in-circuit during factory calibration/programming. Programming the reference voltage, V_{OUT}, is as simple as applying the desired voltage on V_{IN} and toggling the adjust pin (ADJ) to lock the V_{OUT} voltage level indefinitely, even if the device is power cycled. The DS4303 replaces current cumbersome factory adjustment arrangements with a low-cost solution that can be adjusted using automated techniques. In addition, the DS4303 has the ability to be readjusted after the unit has been fully assembled and tested. This results in a much more flexible manufacturing arrangement, lower inventory costs, and a quicker time-to-market.

Applications

- Power-Supply Calibration
- Threshold Setting
- Offset Nulling
- Bias Adjusting
- Power Amps
- Pressure Bridges
- Factory-Calibrated Equipment

Features


- ◆ Precise Electronically Adjustable Voltage Reference
- ◆ Enables Automated Factory Trimming of Devices Needing Voltage Adjustment
- ◆ Can be Adjusted to Within $\pm 1\text{mV}$
- ◆ Wide Adjustable Output Voltage Range Within 300mV of the Supply Rails
- ◆ Low Temperature Coefficient
- ◆ $\pm 1\text{mA}$ of Output-Current Drive
- ◆ NV Memory Stores the Voltage Indefinitely
- ◆ Output Short-Circuit Protection
- ◆ Low Cost
- ◆ Low Power Consumption
- ◆ 2.4V to 3.6V Single-Supply Operation
- ◆ Small 5-Lead SOT23 Package

Ordering Information


PART	TEMP RANGE	PIN-PACKAGE	SOT MARK
DS4303R/T&R	-40°C to +85°C	SOT23-5	4303
DS4303R+T&R	-40°C to +85°C	SOT23-5	4303+

+Denotes lead-free package.

Typical Operating Circuit

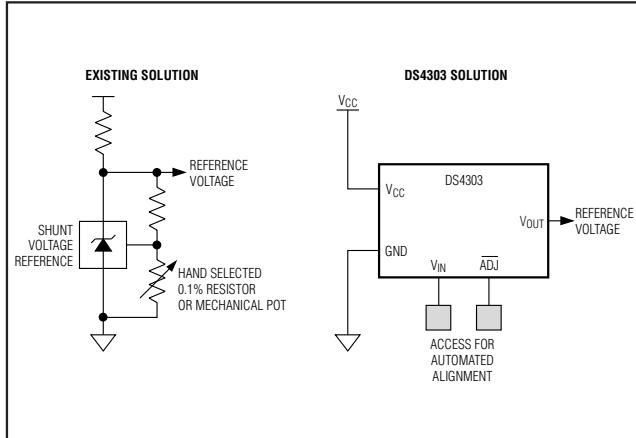

Pin Configuration

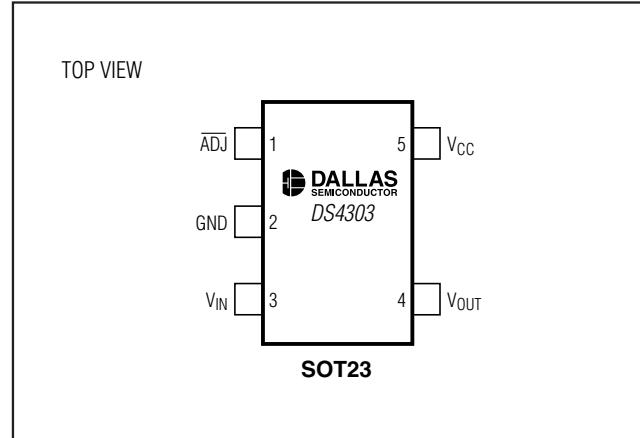

Electronically Programmable Voltage Reference

ABSOLUTE MAXIMUM RATINGS

Voltage on V_{CC} Relative to GND -0.5V to +6.0V
 Voltage on V_{IN}, $\overline{\text{ADJ}}$, and V_{OUT} Relative to GND ... -0.5V to (V_{CC} + 0.5V), not to exceed +6.0V
 Operating Temperature Range -40°C to +85°C

EEPROM Programming Adjust Temperature 0°C to +70°C
 V_{OUT} to GND Short-Circuit Duration Continuous
 Storage Temperature Range -55°C to +125°C
 Soldering Temperature ... See IPC/JEDEC J-STD-020 Specification

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

RECOMMENDED OPERATING CONDITIONS

(T_A = -40°C to +85°C)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Supply Voltage	V _{CC}	(Note 1)	2.4	3.6		V
V _{IN} Voltage Range	V _{IN}		0.3	V _{CC} - 0.3		V
ADJ Logic 0	V _{IIL}		-0.3	0.3 x V _{CC}		V
V _{OUT} Current	V _{OUTI}		-1	+1		mA
V _{OUT} Load	V _{OUTL}			100		pF

ELECTRICAL CHARACTERISTICS

(V_{CC} = +2.4 to +3.6V, T_A = -40°C to +85°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Supply Current	I _{CC}	V _{IN} , $\overline{\text{ADJ}}$ and V _{OUT} = open circuit	1.1	1.6		mA
V _{IN} Resistance	R _{PD}		95			kΩ
ADJ Pullup Resistance	R _{PU}		18			kΩ
V _{OUT} Voltage Range	V _{OUTR}	(Note 1)	0.3	V _{CC} - 0.3		V
V _{OUT} Tracking Accuracy	V _{OUTTA}	(Note 2)		±20		mV
V _{OUT} Quantization	V _{OUTQ}	(Note 3)		±1		mV
V _{OUT} Temperature Coefficient	V _{OUTTC}	-40°C to +85°C, V _{OUT} = 0.4V		±104		µV/°C
		-40°C to +25°C, V _{OUT} = 3.0V	-5	+28	+62	ppm/°C
		+25°C to +85°C, V _{OUT} = 3.0V	-31	-13	+6	
V _{OUT} Line Regulation	V _{OUTLN}		-4.0	+1.0		mV/V
V _{OUT} Load Regulation	V _{OUTLD}	-1mA ≤ V _{OUTI} ≤ +1mA		5.5		mV/mA
Long-Term Stability	V _{OUTLTS}	1000 hours at +25°C		TBD		ppm
V _{OUT} Noise	e _{h1}	0.1Hz ≤ f ≤ 10Hz		200		µV _{P-P}
	e _{h2}	10Hz ≤ f ≤ 1kHz		26		µVRMS
V _{OUT} PSRR	V _{OUTPSRR}	f = 200kHz		21		dB
V _{OUT} Self-Adjust Settling Time	t _{ST}	(Note 4)		11	15	ms/V
EEPROM Programming Time	t _W	(Note 5)		9	12	ms
Turn-On Time	t _{ON}	V _{IN} and $\overline{\text{ADJ}}$ = open circuit (Note 6)		10		µs
ADJ Toggle Low Time	t _{ADJ}		100			ns
V _{OUT} Factory Trimmed Value	V _{OUT FT}	+25°C, V _{CC} = 3.3V (Note 7)		1200		mV

Electronically Programmable Voltage Reference

NONVOLATILE MEMORY CHARACTERISTICS

(V_{CC} = +2.4V to 3.6V, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Programming Cycles		+70°C (Note 8)	50,000			Cycles

Note 1: All voltages referenced to ground.

Note 2: Tracking accuracy is defined as V_{OUT} - V_{IN} after the DS4303 has completed self-adjustment.

Note 3: Quantization refers to the size of the voltage steps used to track the input signal.

Note 4: Settling time is the maximum amount of time V_{OUT} requires to self-adjust. The settling time is determined by the following formula: $\Delta V_{OUT} \times t_{ST}$.

Note 5: EEPROM programming time is the hold time required after the DS4303 has completed self-adjustment before V_{IN} or V_{CC} can be removed or before ADJ can be toggled low once again.

Note 6: Turn-on time is defined as the time required for V_{OUT} to reach its specified accuracy after the required supply voltage is applied.




Note 7: V_{OUT} not loaded.

Note 8: Guaranteed by design.

DS4303

Typical Operating Characteristics

(V_{CC} = 3.3V, T_A = +25°C, unless otherwise noted.)

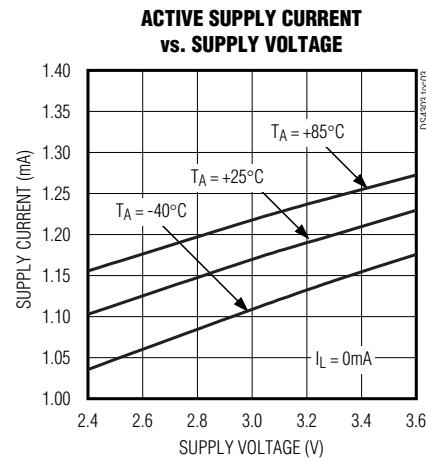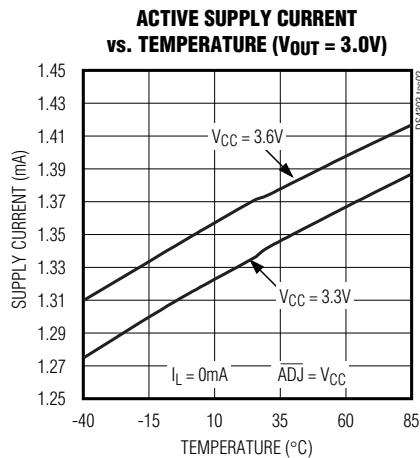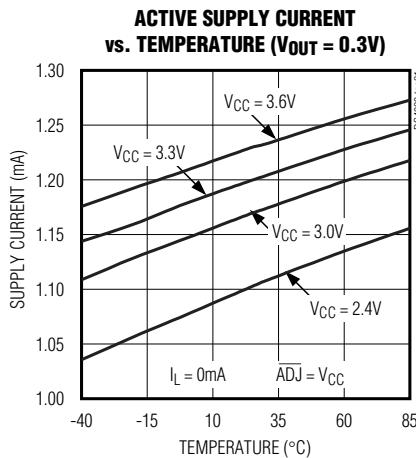


Electronically Programmable Voltage Reference


DS4303

($V_{CC} = 3.3V$, $T_A = +25^\circ C$, unless otherwise noted.)


LOAD REGULATION
($V_{OUT} = 0.3V$)

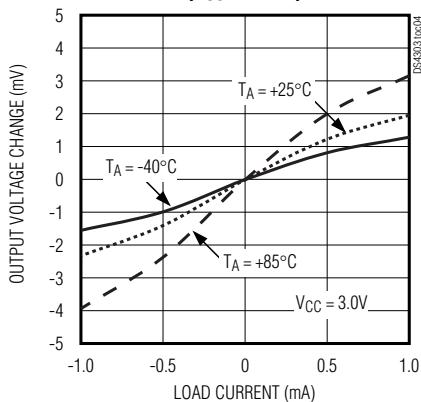


LOAD REGULATION
($V_{OUT} = 3.0V$)

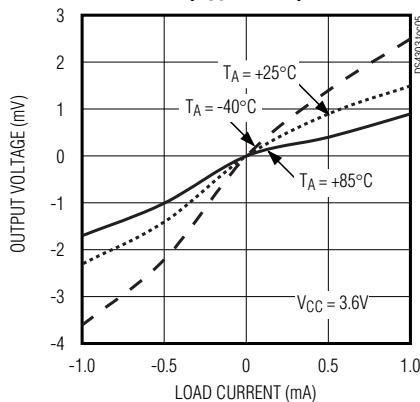


LINE REGULATION
($V_{OUT} = 0.3V$)

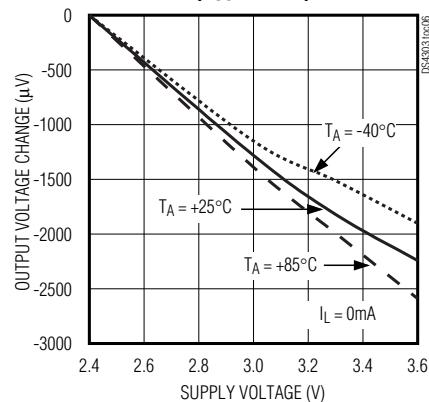


LINE REGULATION
($V_{OUT} = 3.0V$)

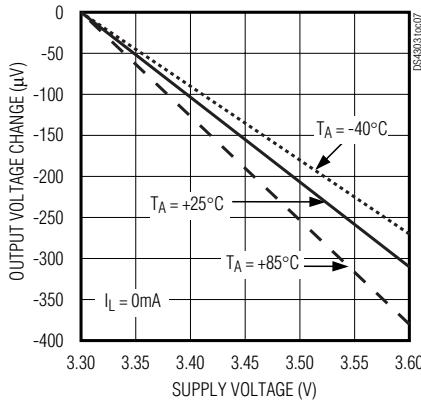


POWER-SUPPLY REJECTION RATIO
vs. FREQUENCY ($V_{CC} = 3.6V$)

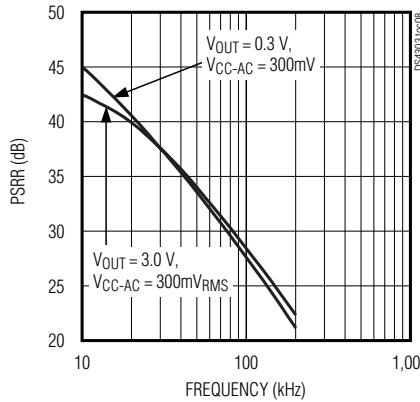


DS4303 OUTPUT NOISE
(0.1Hz to 10Hz)

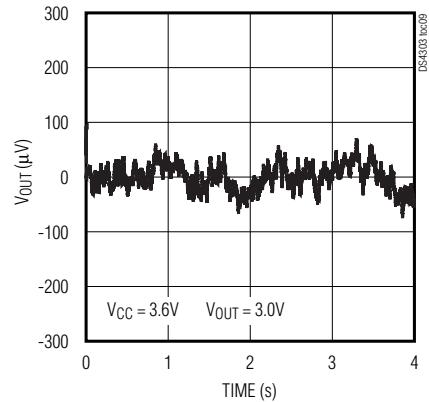


DS4303 OUTPUT NOISE
(10Hz to 1kHz)

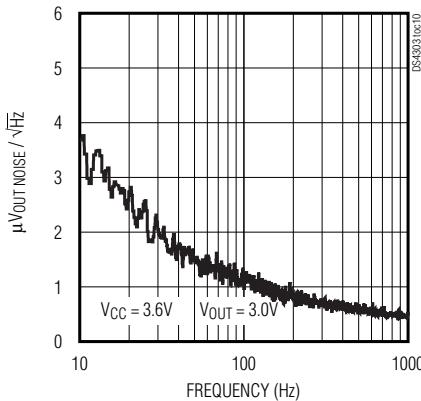

DS4303 TURN-ON
TRANSIENT

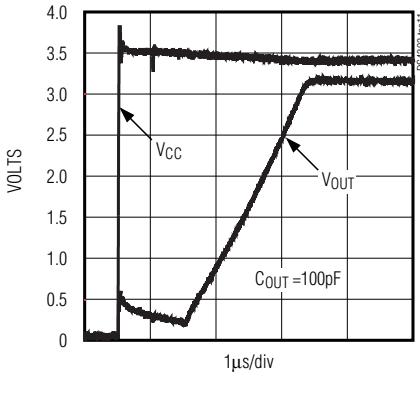

DS4303 LOAD TRANSIENT
($V_{OUT} = 3.3V$, $V_{CC} = 3.6V$)





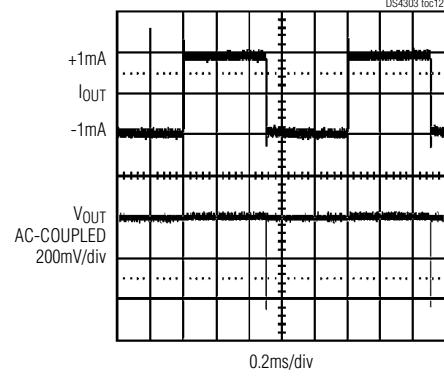


Electronically Programmable Voltage Reference

DS4303

Typical Operating Characteristics (continued)

($V_{CC} = 3.3V$, $T_A = +25^\circ C$, unless otherwise noted.)

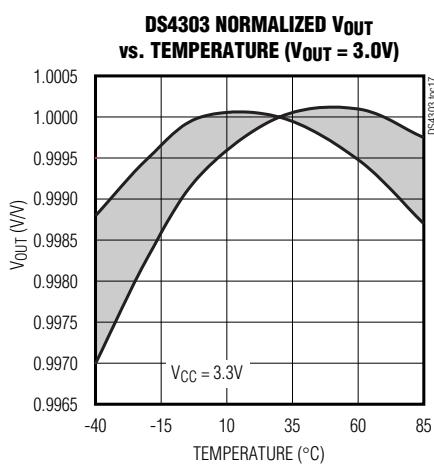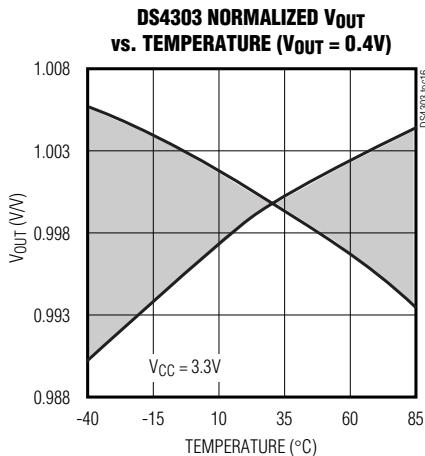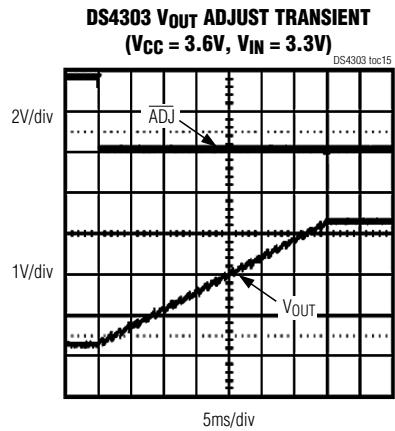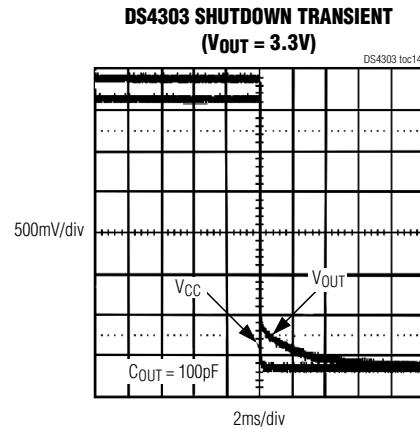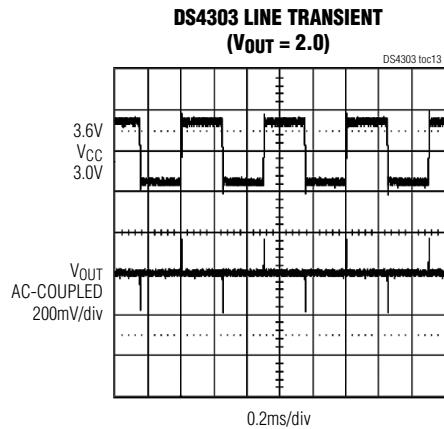


Electronically Programmable Voltage Reference

Pin Description

PIN	NAME	FUNCTION
1	ADJ	Adjust Control Input
2	GND	Ground
3	V _{IN}	Sample Voltage Input
4	V _{OUT}	Voltage Output
5	V _{CC}	Power-Supply Voltage

Block Diagram

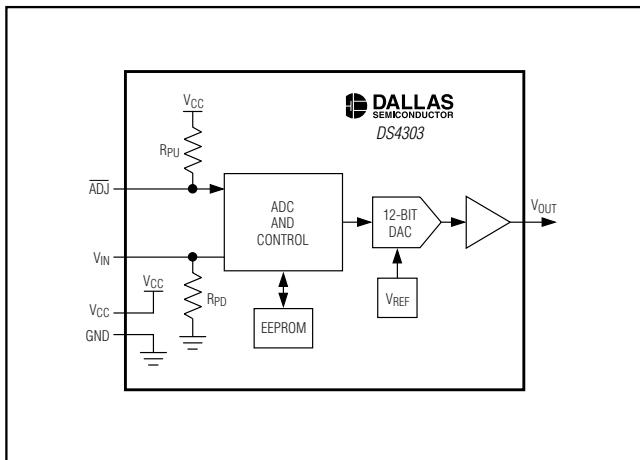

Detailed Description

The DS4303 provides a precise, NV output voltage, V_{OUT}, making it an ideal solution for factory calibration of embedded systems. The DS4303 output voltage can be adjusted over almost the entire operating supply range of the device, and it can be precisely set to within $\pm 1\text{mV}$. A graphical description of the DS4303 is provided in the block diagram.

During factory calibration, a simple adjustment procedure must be followed. This entire procedure includes setting V_{IN}, toggling ADJ, waiting as V_{OUT} self-adjusts, and waiting for the completion of the EEPROM storage cycle (See the timing diagram in Figure 1). At the start of calibration, a voltage must be placed on V_{IN}. This voltage needs to be completely stable before the adjustment procedure begins, and it must remain stable throughout the entire adjustment procedure. The DS4303 will start its self-adjust procedure when the ADJ pin is pulled low and held low for at least t_{ADJ}, after which it can be released at any time. Once ADJ has been released, it should not be toggled again for the remainder of the adjustment procedure. After the falling edge on ADJ and the wait time, t_{ADJ}, the V_{OUT} self-adjust period begins. The length of the V_{OUT} self-adjust period can be determined using the formula $\Delta V \times t_{ST}$, where ΔV is |V_{OUT OLD} - V_{OUT NEW}|.

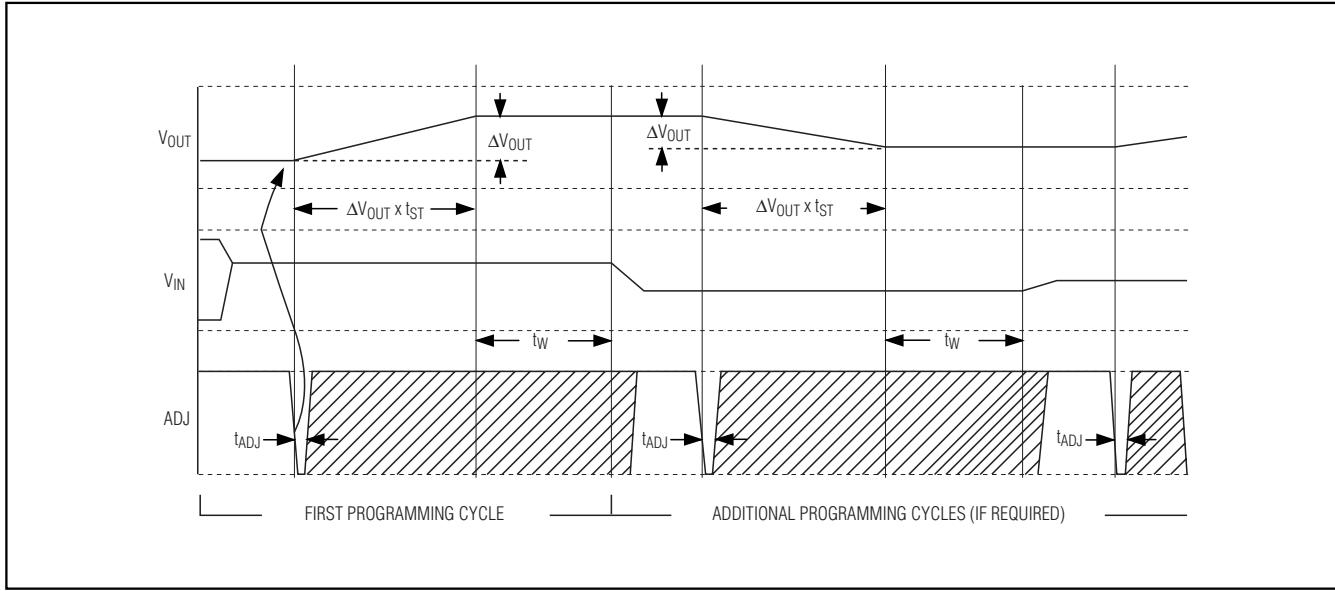


Figure 1. Timing Diagram

Electronically Programmable Voltage Reference

DS4303

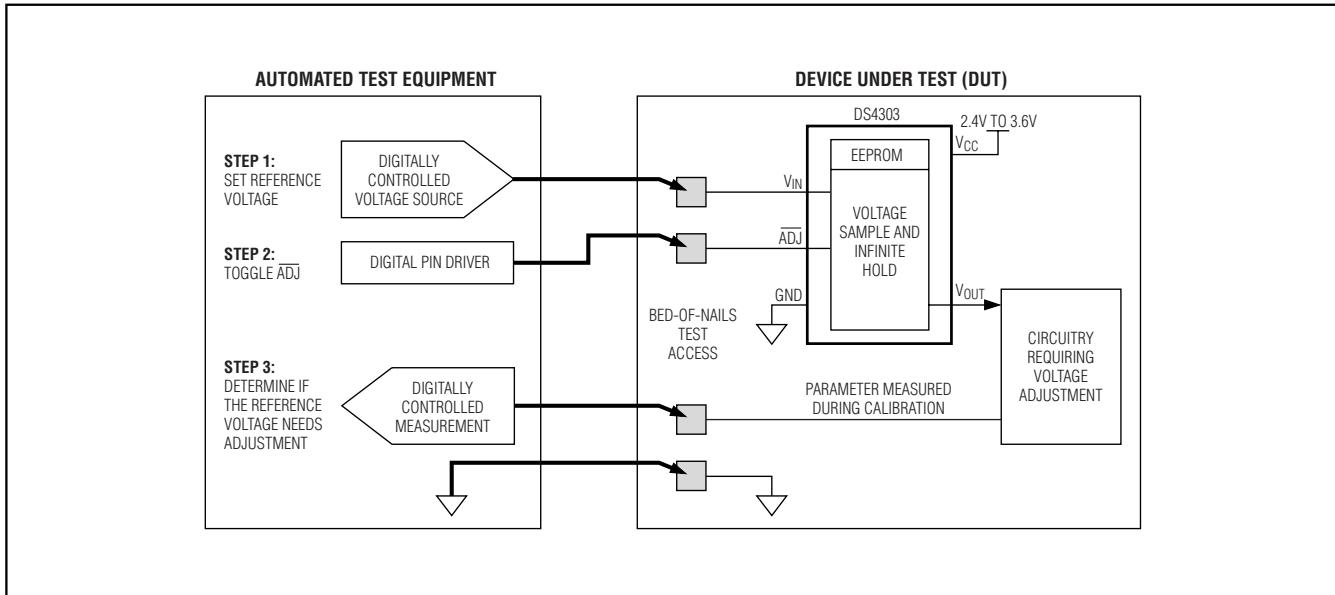


Figure 2. Application Circuit

During the V_{OUT} self-adjust period, the DS4303 internally adjusts the onboard DAC until V_{OUT} matches V_{IN} . After V_{OUT} has stabilized to within the tracking accuracy, V_{OUTTA} , of V_{IN} , it will be automatically stored in EEPROM. The storage period lasts for the duration of the EEPROM write time, t_W . After the first adjustment procedure has completed, V_{OUT} can be measured, and if necessary V_{IN} can be readjusted and the entire adjustment procedure can be repeated to fine-tune V_{OUT} within the V_{OUTQ} range.

Following each self-adjust procedure, V_{OUT} is saved indefinitely, even if the DS4303 is power cycled.

Automated Programming Procedure

Figure 2 details an example of how the DS4303 can be adjusted in an application. During factory alignment, a three/four-node bed-of-nails is used to: (1) provide the adjustment voltage through the V_{IN} pin, (2) control the \overline{ADJ} input, and (3) sense the needed feedback parameter. During manufacture, an automated test procedure adjusts V_{OUT} by changing V_{IN} , until the feedback parameter is optimized. After the bed-of-nails operation is complete, both the V_{IN} and \overline{ADJ} inputs are left open

circuit. V_{OUT} can be readjusted at any time by following the same procedure. The closed-loop nature of the adjustment process removes all the system inaccuracies such as resistor tolerances, amplifier offsets, gain mismatches, and even the inaccuracies in the automated equipment that provides the reference voltage.

Typical Operating Circuit

The typical operating circuit shows an example of how the DS4303 can replace most existing calibration solutions. Many power supplies use a shunt voltage reference to provide the internal reference voltage, and fine-tune adjustments are often made with hand-selected discrete resistors. The DS4303 replaces this cumbersome arrangement with a solution that is capable of being adjusted by automated techniques. An additional benefit of the DS4303 is the ability to provide a much lower voltage (down to 300mV) than is possible with shunt voltage references. Another benefit of the DS4303 is the ability to be adjusted after the unit has been fully assembled and tested, resulting in a much more flexible manufacturing arrangement, lower inventory costs, and a quicker time-to-market.

Electronically Programmable Voltage Reference

Layout Considerations

To prevent an inadvertent programming cycle from occurring during power-up, minimize capacitive loading on the ADJ pin. A large capacitance on this pin could potentially hold ADJ in a low state long enough that a programming cycle is initiated.

Power-Supply Decoupling

To achieve best results, it is highly recommended that a decoupling capacitor is used on the IC power-supply pin. Typical values of decoupling capacitors are $0.01\mu\text{F}$ or $0.1\mu\text{F}$. Use a high-quality, ceramic, surface-mount capacitor, and mount it as close as possible to the VCC and GND pins of the IC to minimize lead inductance.

Chip Topology

TRANSISTOR COUNT: 6001

SUBSTRATE CONNECTED TO GROUND

Package Information

For the latest package outline information, go to
www.maxim-ic.com/DallasPackInfo.

Revision History

Pages changed at Rev1: 1

Title changes—all pages

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

8 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**

© 2005 Maxim Integrated Products

MAXIM is a registered trademark of Maxim Integrated Products, Inc.

 **DALLAS SEMICONDUCTOR** is a registered trademark of Dallas Semiconductor Corporation.

Данный компонент на территории Российской Федерации**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9