


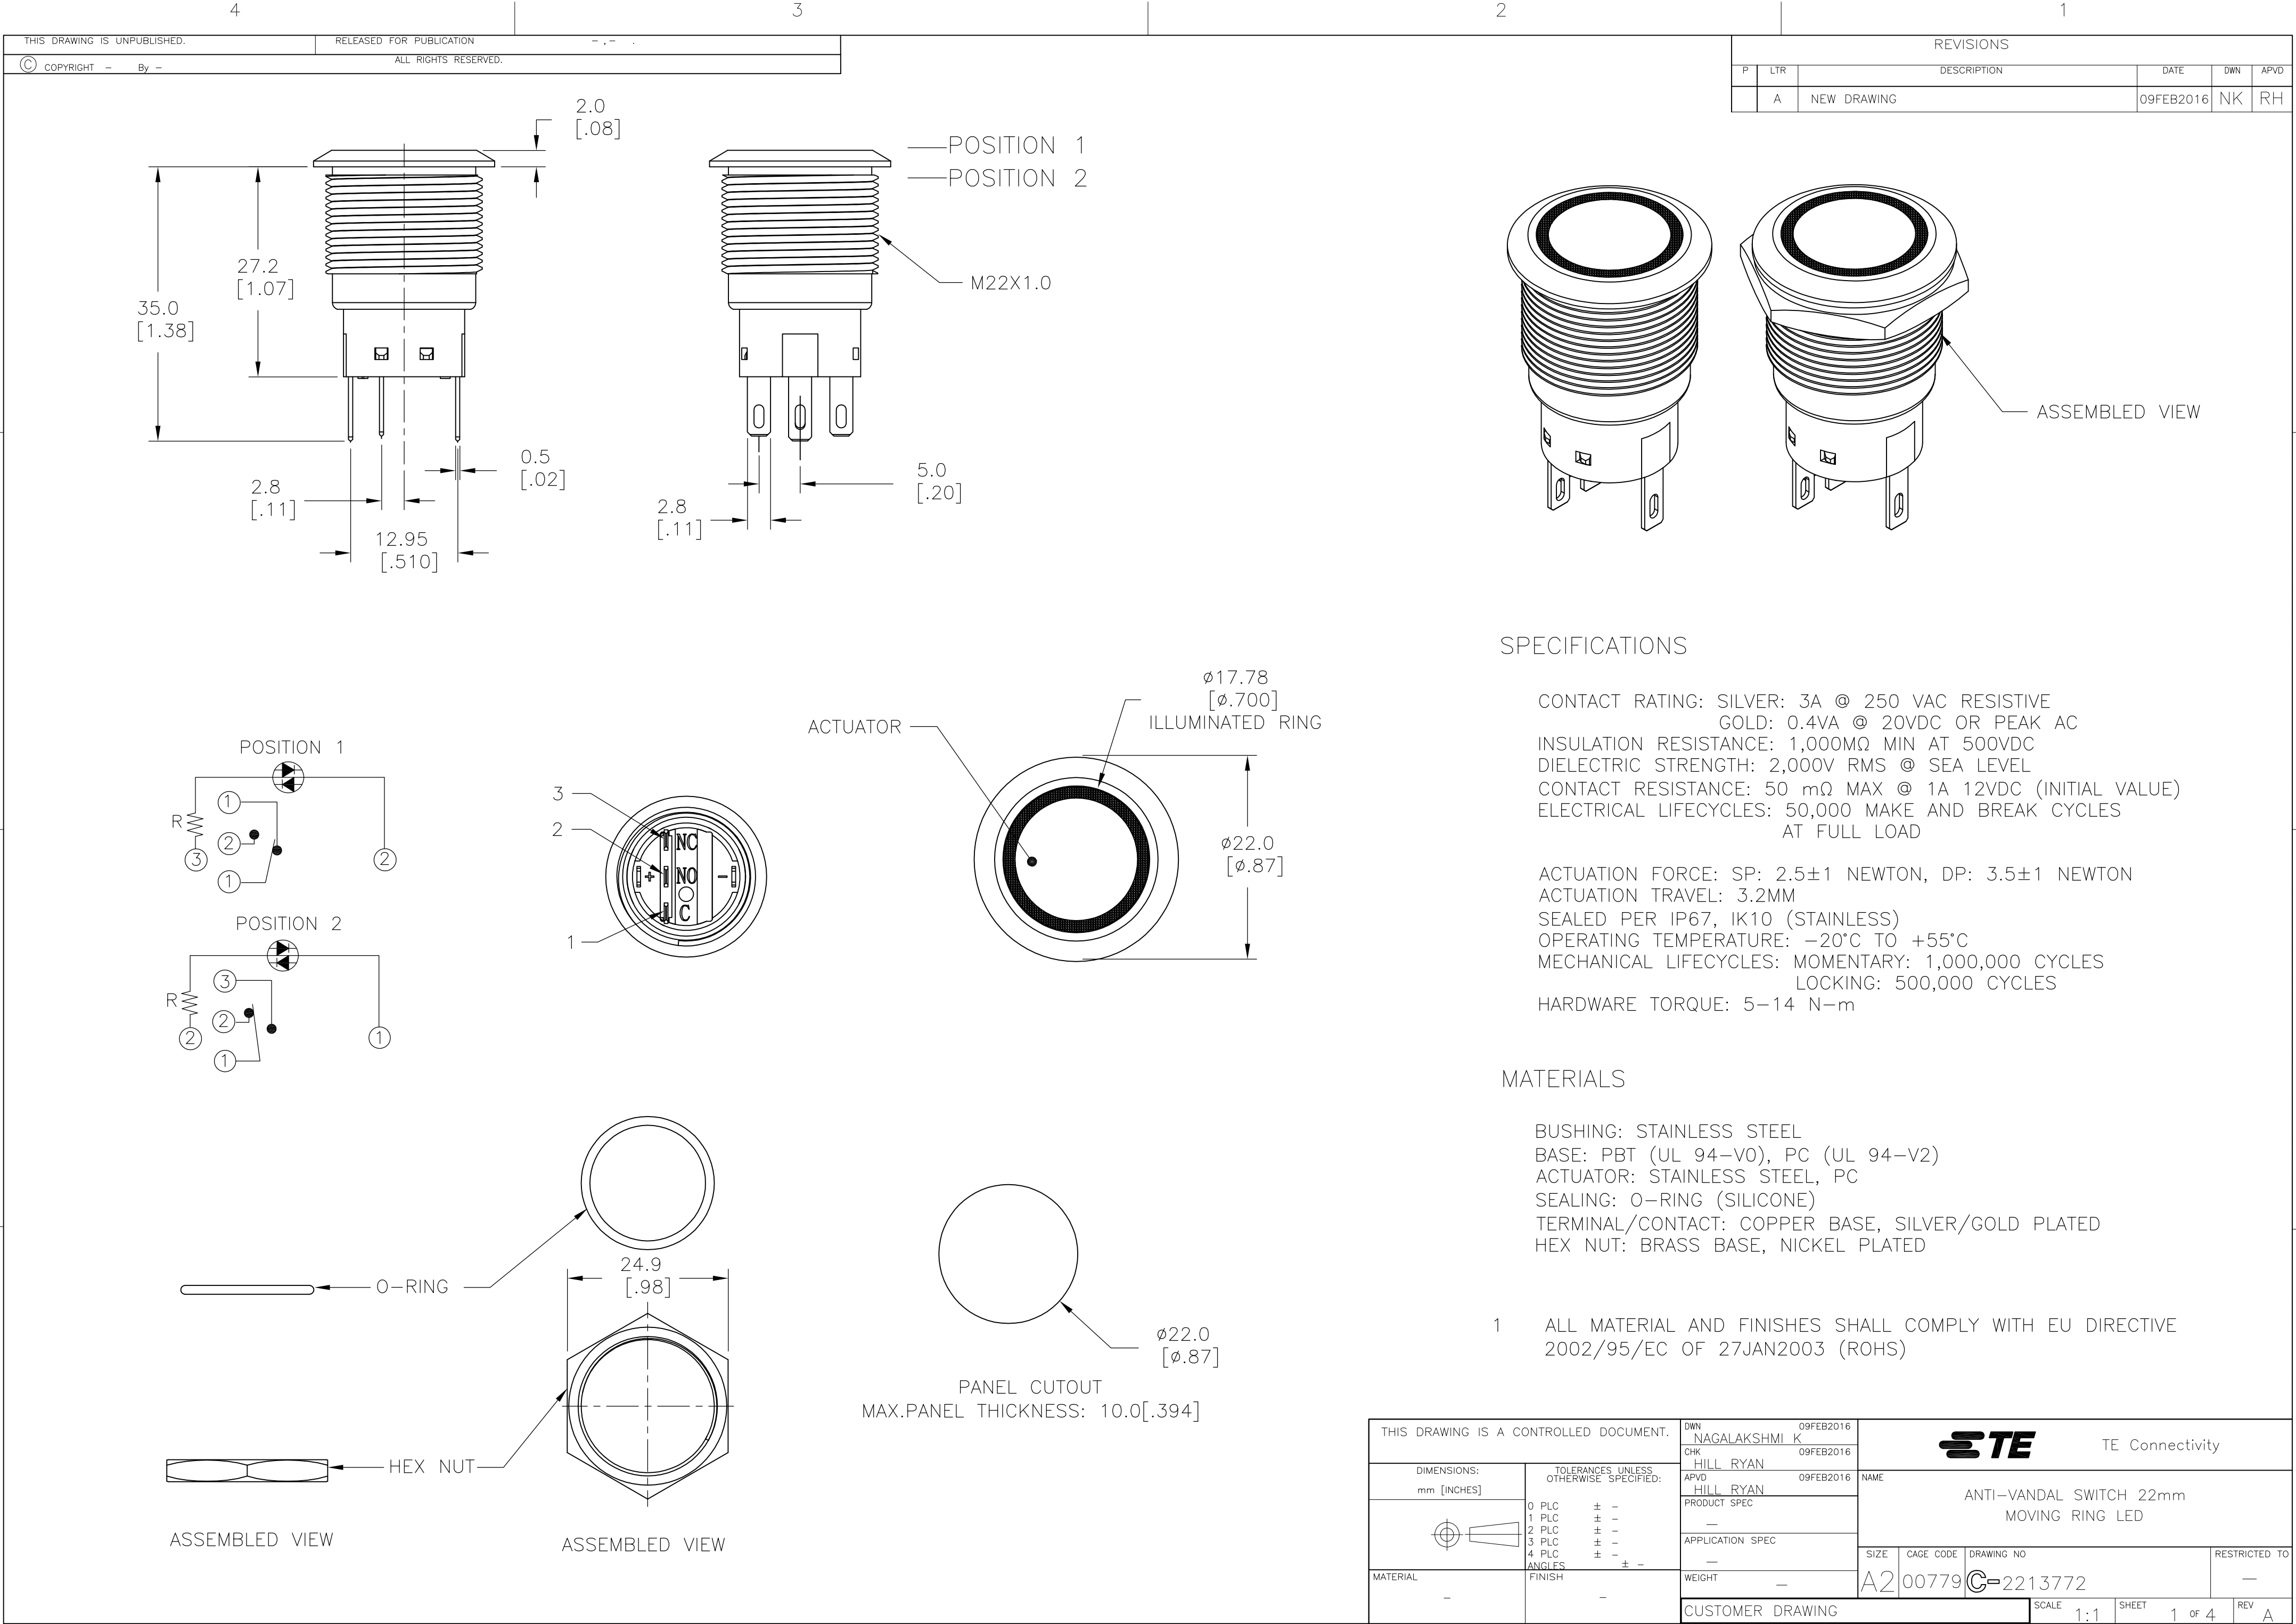

SPECIFICATIONS

CONTACT RATING: SILVER: 3A @ 250 VAC RESISTIVE
GOLD: 0.4VA @ 20VDC OR PEAK AC
INSULATION RESISTANCE: 1,000MΩ MIN AT 500VDC
DIELECTRIC STRENGTH: 2,000V RMS @ SEA LEVEL
CONTACT RESISTANCE: 50 mΩ MAX @ 1A 12VDC (INITIAL VALUE)
ELECTRICAL LIFECYCLES: 50,000 MAKE AND BREAK CYCLES AT FULL LOAD

ACTUATION FORCE: SP: 2.5±1 NEWTON, DP: 3.5±1 NEWTON
ACTUATION TRAVEL: 3.2MM
SEALED PER IP67, IK10 (STAINLESS)
OPERATING TEMPERATURE: -20°C TO +55°C
MECHANICAL LIFECYCLES: MOMENTARY: 1,000,000 CYCLES
LOCKING: 500,000 CYCLES
HARDWARE TORQUE: 5-14 N-m





MATERIALS

BUSHING: STAINLESS STEEL
BASE: PBT (UL 94-V0), PC (UL 94-V2)
ACTUATOR: STAINLESS STEEL, PC
SEALING: O-RING (SILICONE)
TERMINAL/CONTACT: COPPER BASE, SILVER/GOLD PLATED
HEX NUT: BRASS BASE, NICKEL PLATED



1 ALL MATERIAL AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K	09FEB2016	TE Connectivity			
		CHK HILL RYAN	09FEB2016				
		APVD HILL RYAN	09FEB2016	NAME			
		PRODUCT SPEC		ANTI-VANDAL SWITCH 22mm MOVING RING LED			
		APPLICATION SPEC		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
				A2	00779	C=2213772	-
		WEIGHT					
		CUSTOMER DRAWING		SCALE	1:1	SHEET	1 OF 4
				REV			
				A			

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

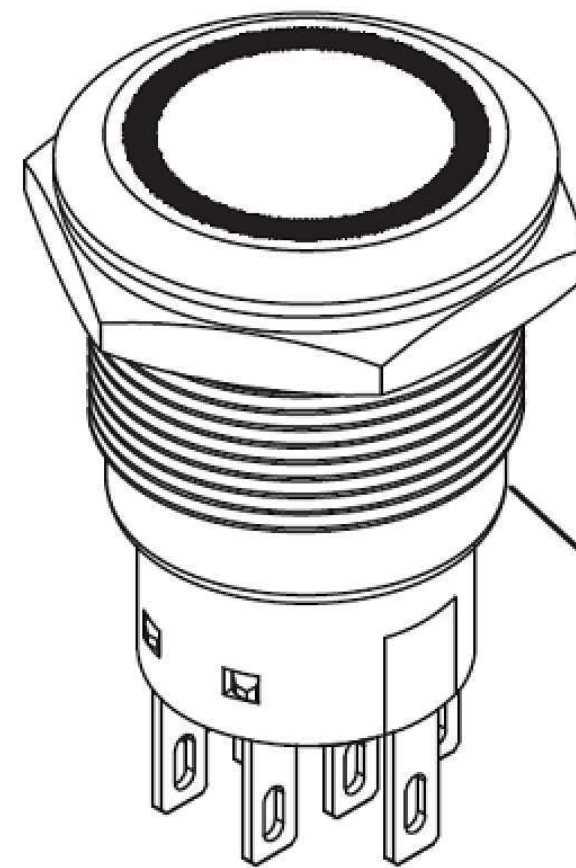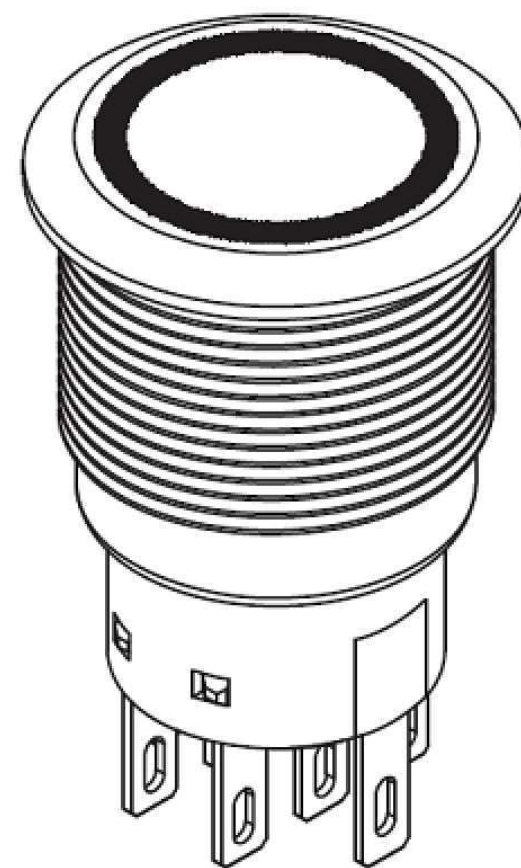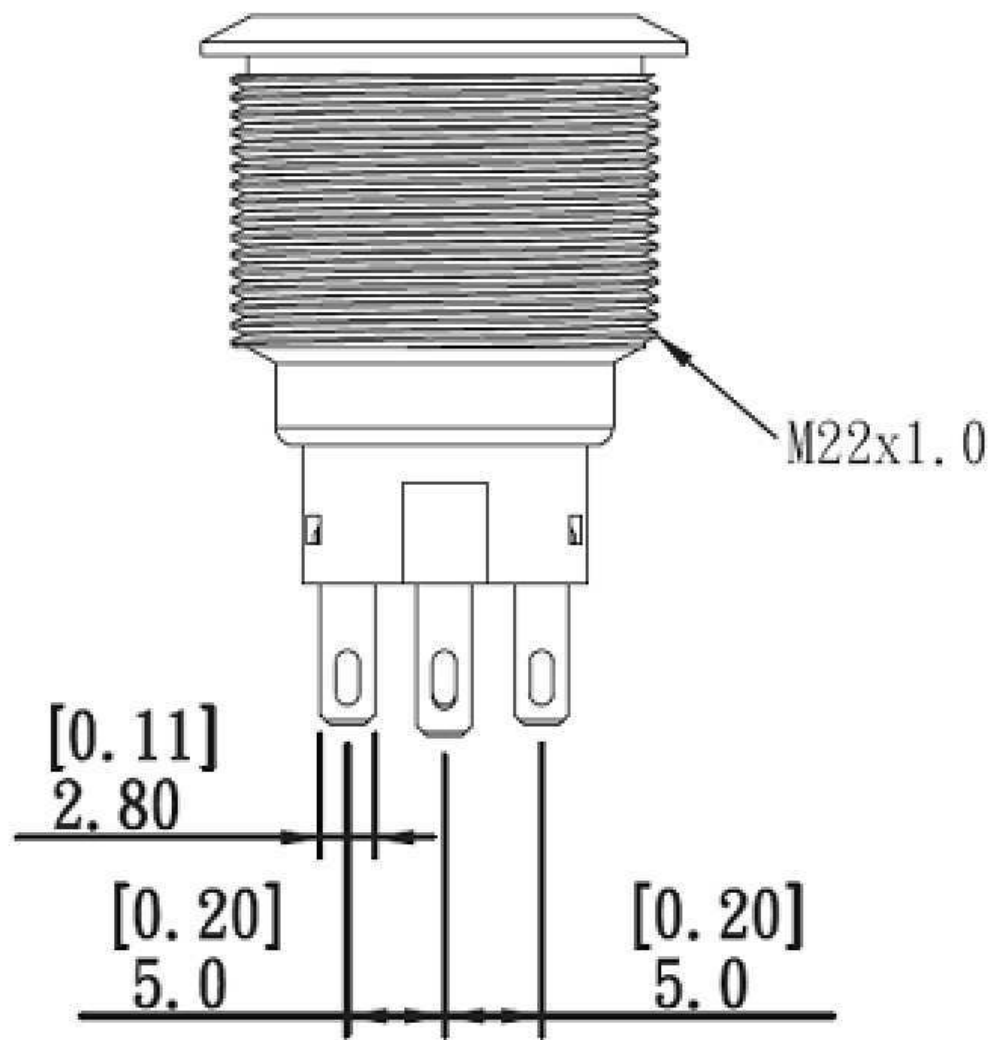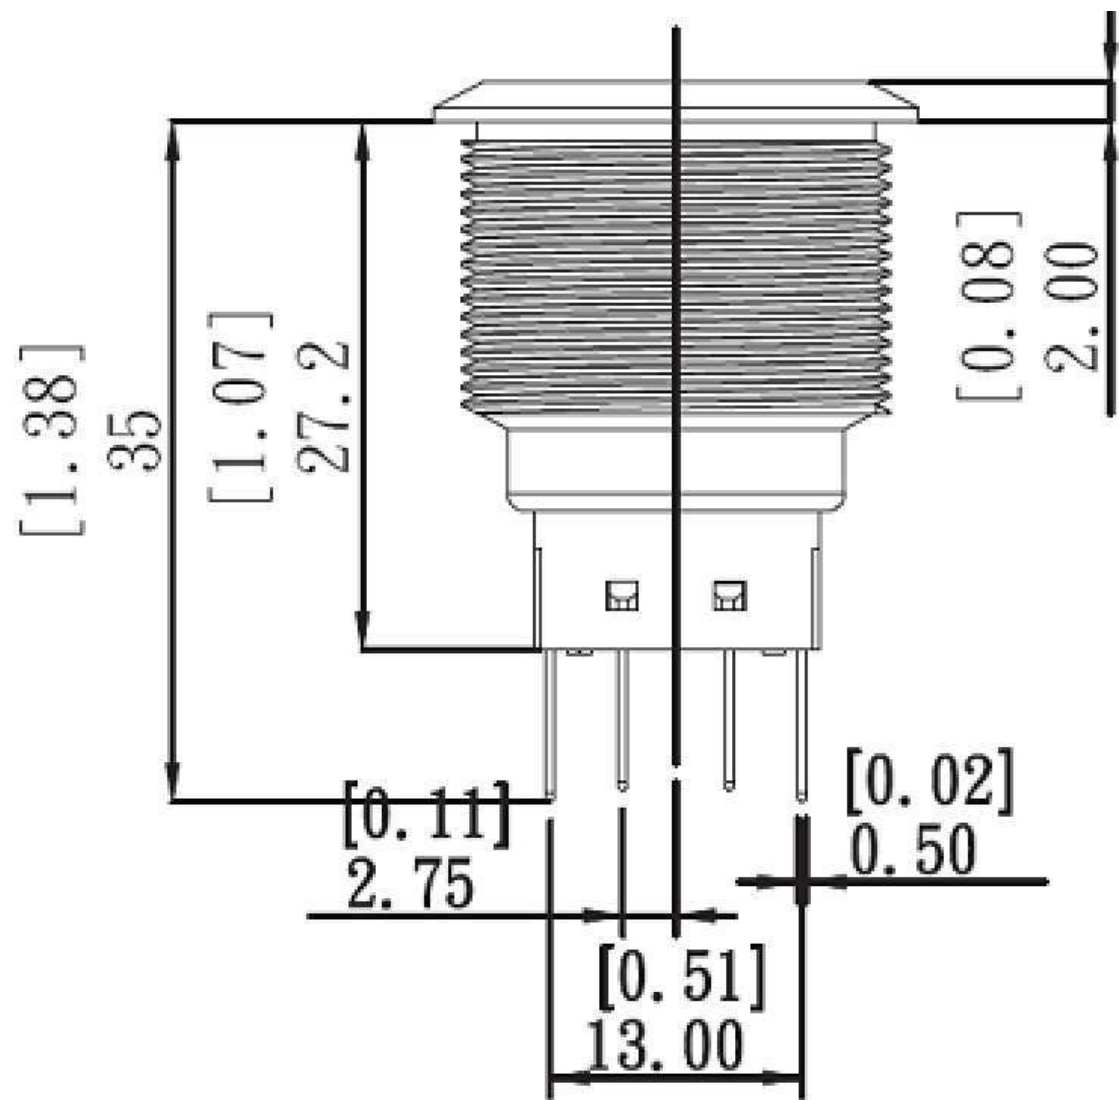


ASSEMBLED VIEW

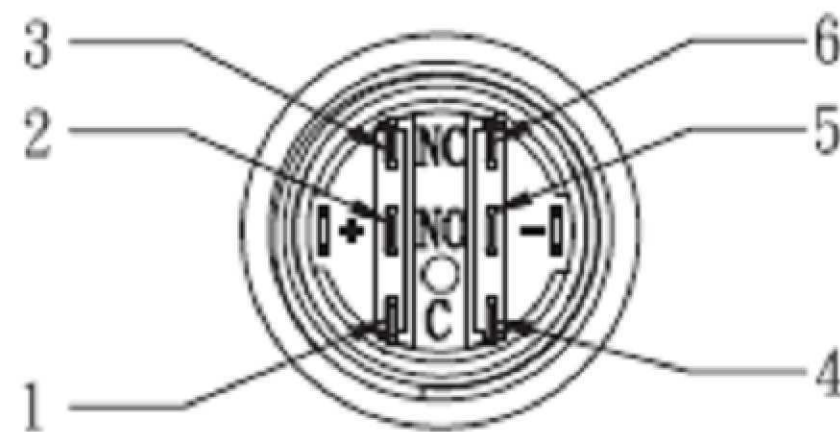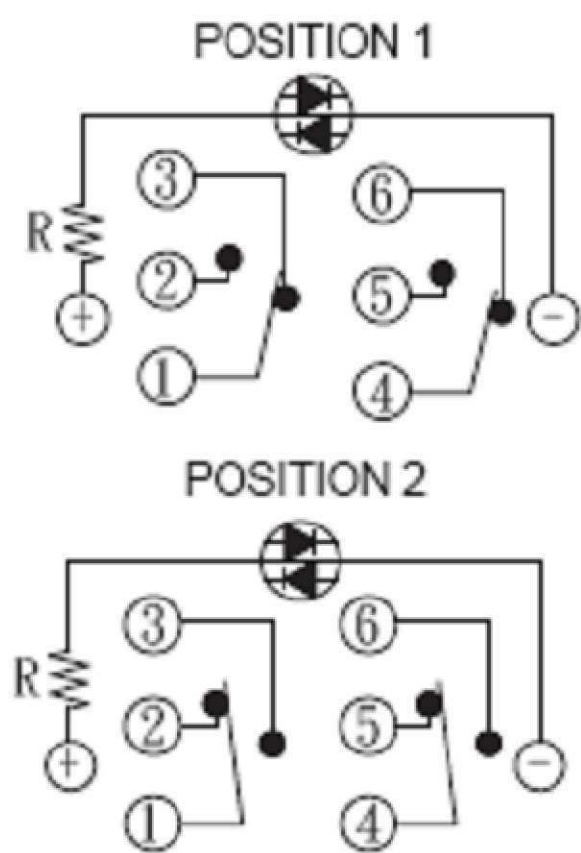

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K 09FEB2016	 TE Connectivity							
		CHK HILL RYAN 09FEB2016								
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD HILL RYAN 09FEB2016	NAME							
	0 PLC ± —	PRODUCT SPEC	ANTI-VANDAL SWITCH 22mm MOVING RING LED							
	1 PLC ± —	—								
	2 PLC ± —	—								
	3 PLC ± —	APPLICATION SPEC								
	4 PLC ± —	—								
ANGLES ± —			SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO				
MATERIAL	FINISH	WEIGHT	A2 00779		G=2213772		—			
—		CUSTOMER DRAWING			SCALE	1:1	SHEET	2 OF 4	REV	A

4		3		2		1	
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		-		-	
© COPYRIGHT - By -		ALL RIGHTS RESERVED.					
						REVISIONS	
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	-	SEE SHEET 1		-	-	-	
DOUBLE POLE- LOCKING	GOLD	BLUE	24V	AV2221E724R04	8-2213772-0		
	SILVER	BLUE	24V	AV2221E724Q04	7-2213772-9		
	GOLD	BLUE	12V	AV2221E712R04	7-2213772-8		
	SILVER	BLUE	12V	AV2221E712Q04	7-2213772-7		
	GOLD	GREEN	24V	AV2221E624R04	7-2213772-6		
	SILVER	GREEN	24V	AV2221E624Q04	7-2213772-5		
	GOLD	GREEN	12V	AV2221E612R04	7-2213772-4		
	SILVER	GREEN	12V	AV2221E612Q04	7-2213772-3		
	GOLD	YELLOW	24V	AV2221E524R04	7-2213772-2		
	SILVER	YELLOW	24V	AV2221E524Q04	7-2213772-1		
	GOLD	YELLOW	12V	AV2221E512R04	7-2213772-0		
	SILVER	YELLOW	12V	AV2221E512Q04	6-2213772-9		
	GOLD	RED	24V	AV2221E324R04	6-2213772-8		
	SILVER	RED	24V	AV2221E324Q04	6-2213772-7		
	GOLD	RED	12V	AV2221E312R04	6-2213772-6		
	SILVER	RED	12V	AV2221E312Q04	6-2213772-5		
	GOLD	WHITE	24V	AV2221E124R04	6-2213772-4		
	SILVER	WHITE	24V	AV2221E124Q04	6-2213772-3		
	GOLD	WHITE	12V	AV2221E112R04	6-2213772-2		
	SILVER	WHITE	12V	AV2221E112Q04	6-2213772-1		
DOUBLE POLE- MOMENTARY	GOLD	BLUE	24V	AV2220E724R04	6-2213772-0		
	SILVER	BLUE	24V	AV2220E724Q04	5-2213772-9		
	GOLD	BLUE	12V	AV2220E712R04	5-2213772-8		
	SILVER	BLUE	12V	AV2220E712Q04	5-2213772-7		
	GOLD	GREEN	24V	AV2220E624R04	5-2213772-6		
	SILVER	GREEN	24V	AV2220E624Q04	5-2213772-5		
	GOLD	GREEN	12V	AV2220E612R04	5-2213772-4		
	SILVER	GREEN	12V	AV2220E612Q04	5-2213772-3		
	GOLD	YELLOW	24V	AV2220E524R04	5-2213772-2		
	SILVER	YELLOW	24V	AV2220E524Q04	5-2213772-1		
	GOLD	YELLOW	12V	AV2220E512R04	5-2213772-0		
	SILVER	YELLOW	12V	AV2220E512Q04	4-2213772-9		
	GOLD	RED	24V	AV2220E324R04	4-2213772-8		
	SILVER	RED	24V	AV2220E324Q04	4-2213772-7		
	GOLD	RED	12V	AV2220E312R04	4-2213772-6		
	SILVER	RED	12V	AV2220E312Q04	4-2213772-5		
	GOLD	WHITE	24V	AV2220E124R04	4-2213772-4		
	SILVER	WHITE	24V	AV2220E124Q04	4-2213772-3		
	GOLD	WHITE	12V	AV2220E112R04	4-2213772-2		
	SILVER	WHITE	12V	AV2220E112Q04	4-2213772-1		
POLE/THROW	CONTACT	LED COLOR	LED VOLTAGE	TE DESCRIPTIVE PN		TE PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K	09FEB2016	 TE Connectivity			
		CHK HILL RYAN	09FEB2016				
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
		0 PLC ± -		APVD HILL RYAN			
		1 PLC ± -		PRODUCT SPEC			
		2 PLC ± -		APPLICATION SPEC			
3 PLC ± -		3 PLC ± -		SIZE			
4 PLC ± -		4 PLC ± -		CAGE CODE			
ANGLES ± -		FINISH		DRAWING NO			
MATERIAL		-		RESTRICTED TO			
				A200779C=2213772			
				CUSTOMER DRAWING			
				SCALE 1:1			
				SHEET 4 of 4			
				REV A			

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9