

# Thermomagnetic device circuit breaker - CB TM1 5A SFB

## P - 2800840

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic SFB, 1 PDT contact, plug for base element.

The figure shows the CB TM1  
0.5A SFB P version

### Why buy this product

- ✓ Compact design with precise nominal current levels
- ✓ Modular expansion possible thanks to the uniform, plug-in housing concept
- ✓ Sophisticated remote signaling concept enables monitoring from any location
- ✓ Maximum overcurrent protection across long cable paths via SFB trigger characteristic
- ✓ Supply/remote signaling can be bridged with CLIPLINE complete accessories



### Key commercial data

|                        |                                                                                                         |
|------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit           | 0                                                                                                       |
| Minimum order quantity | 1                                                                                                       |
| GTIN                   | <br>4 046356 689915 |
| Custom tariff number   | 85363010                                                                                                |
| Country of origin      | GERMANY                                                                                                 |

### Technical data

#### General

|                                 |                                                                                                                     |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------|
| Installation instructions       | When mounted in rows, the nominal device current can be limited to just 80% or must be overdimensioned accordingly. |
| Height                          | 45 mm                                                                                                               |
| Width                           | 12.3 mm                                                                                                             |
| Depth                           | 52 mm                                                                                                               |
| Höhe Kompletต์modul             | 90 mm                                                                                                               |
| Breite Kompletтьmodul           | 12.3 mm                                                                                                             |
| Tiefe Kompletтьmodul            | 77.3 mm                                                                                                             |
| Ambient temperature (operation) | -30 °C ... 60 °C                                                                                                    |

# Thermomagnetic device circuit breaker - CB TM1 5A SFB

## P - 2800840

### Technical data

#### General

|                                         |                       |
|-----------------------------------------|-----------------------|
| Ambient temperature (storage/transport) | -40 °C ... 80 °C      |
| Inflammability class according to UL 94 | V0                    |
| Degree of protection                    | IP30 (Actuation area) |
| Mounting type                           | On base element       |
| Color                                   | gray                  |
| Number of positions                     | 1                     |
| Insulating material group               | II                    |
| Pollution degree                        | 2                     |
| Design                                  | Male                  |

#### Technical data

|                                                 |                                                                     |
|-------------------------------------------------|---------------------------------------------------------------------|
| Fuse type                                       | SFB                                                                 |
| Rated surge voltage                             | 2.5 kV (Increased insulation in actuation area)                     |
| Rated voltage                                   | 240 V AC (Ue according to IEC 60934)                                |
| Rated voltage                                   | 277 V AC (UL 1077)                                                  |
| Rated voltage                                   | 277 V AC (UL 508 - with plug-in base)                               |
| Rated voltage                                   | 50 V DC (IEC 60934)                                                 |
| Rated voltage                                   | 50 V DC (UL 1077)                                                   |
| Rated voltage                                   | 50 V DC (UL 508 - with plug-in base)                                |
| Rated current $I_n$                             | 5 A (IEC 60934)                                                     |
| Rated current $I_n$                             | 5 A AC (inductive load according to UL 1077)                        |
| Rated current $I_n$                             | 5 A DC (low-induction load according to UL 1077)                    |
| Rated current $I_n$                             | 5 A AC (inductive load according to UL 508 - with plug-in base)     |
| Rated current $I_n$                             | 5 A DC (low-induction load according to UL 508 - with plug-in base) |
| Rated insulation voltage $U_i$                  | 277 V AC (UL 1077)                                                  |
| Rated insulation voltage $U_i$                  | 250 V AC (IEC 60934)                                                |
| Insulation resistance $R_{iso}$                 | > 100 MΩ (500 V DC)                                                 |
| Auxiliary circuit                               | 277 V AC / 0.5 A (Low-induction)                                    |
| Auxiliary circuit                               | 277 V AC / 1 A (Low-induction, maximum of 2000 cycles)              |
| Auxiliary circuit                               | 50 V DC / 1 A (Low-induction)                                       |
| Type of actuation                               | S type                                                              |
| Tripping method                                 | TM (thermomagnetic)                                                 |
| Tripping level                                  | Trip-free mechanism (positive)                                      |
| Required backup fuse                            | 20 A                                                                |
| Rated short-circuit switching capacity $I_{cn}$ | 300 A (240 V AC)                                                    |
| Rated short-circuit switching capacity $I_{cn}$ | 600 A (50 V DC)                                                     |
| Dielectric strength                             | 3000 V AC (Actuation area)                                          |
| Dielectric strength                             | 1500 V AC (Main to auxiliary circuit)                               |
| Dielectric strength                             | 1500 V AC (Open main circuit)                                       |
| Dielectric strength                             | 1000 V AC (Open auxiliary circuit)                                  |
| Voltage drop                                    | 0.31 V (at 1 x $I_n$ )                                              |

# Thermomagnetic device circuit breaker - CB TM1 5A SFB P - 2800840

## Technical data

### Technical data

|              |                               |
|--------------|-------------------------------|
| Cycles, max. | 6000 (at 1 x I <sub>n</sub> ) |
| Contact type | 1 PDT                         |

### Standards

|                              |                      |
|------------------------------|----------------------|
| Standard - Electrical safety | EN 60934             |
| Standard - Electrical safety | UL 1077              |
| Standard - Electrical safety | UL 508               |
| Standard - Electrical safety | CSA 22.2 No. 235-041 |

## Classifications

### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC000899 |
| ETIM 4.0 | EC000899 |
| ETIM 5.0 | EC000899 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 11     | 39121411 |
| UNSPSC 12.01  | 39121411 |
| UNSPSC 13.2   | 39121411 |
| UNSPSC 6.01   | 30211812 |
| UNSPSC 7.0901 | 39121411 |

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27141116 |
| eCl@ss 4.1 | 27141116 |
| eCl@ss 5.0 | 27141116 |
| eCl@ss 5.1 | 27141116 |
| eCl@ss 6.0 | 27141116 |
| eCl@ss 7.0 | 27141116 |

## Approvals

### Approvals

#### Approvals

VDE Zeichengenehmigung / UL Recognized / cUL Recognized / cULus Recognized

#### Ex Approvals

# Thermomagnetic device circuit breaker - CB TM1 5A SFB P - 2800840

## Approvals

Approvals submitted

---

### Approval details

VDE Zeichengenehmigung 

UL Recognized 

cUL Recognized 

cULus Recognized 

## Accessories

### Accessories

#### Bridges

Plug-in bridge - FBS 2-6 - 3030336



Plug-in bridge, Number of positions: 2, Color: red

---

Plug-in bridge - FBS 3-6 - 3030242



Plug-in bridge, Number of positions: 3, Color: red

# Thermomagnetic device circuit breaker - CB TM1 5A SFB P - 2800840

## Accessories

Plug-in bridge - FBS 4-6 - 3030255



Plug-in bridge, Number of positions: 4, Color: red

---

Plug-in bridge - FBS 5-6 - 3030349



Plug-in bridge, Number of positions: 5, Color: red

---

Plug-in bridge - FBS 10-6 - 3030271



Plug-in bridge, Number of positions: 10, Color: red

---

Plug-in bridge - FBS 20-6 - 3030365



Plug-in bridge, Number of positions: 20, Color: red

---

Plug-in bridge - FBS 50-6 - 3032224



Plug-in bridge, Number of positions: 50, Color: red

---

## Marking

# Thermomagnetic device circuit breaker - CB TM1 5A SFB P - 2800840

## Accessories

Zack Marker strip, flat - ZBF 12:UNBEDRUCKT - 0809735



Zack Marker strip, flat, Strip, white, Unlabeled, Can be labeled with: Plotter, Mounting type: Snap into flat marker groove, For terminal block width: 12 mm, Lettering field: 5.15 x 12.15 mm

Zack Marker strip, flat - ZBF 12 CUS - 0825018



Zack Marker strip, flat, Can be ordered: Strip, white, Labeled according to customer specifications, Mounting type: Snap into flat marker groove, For terminal block width: 12 mm, Lettering field: 5.15 x 12.15 mm

## Tools

Cable-cutting tool - CUTFOX-FBS - 1212124



Cutting tool, for separating individual jumper bars from FBS ... plug-in bridges and EB ... insertion bridges

Jumper - CB PT BRIDGE - 2801014



Bridge plugs for the CB 1/6-2/4 PT-BE base element

## Additional products

Base element - CB 1/6-2/4 PT-BE - 2800929




Base element with push-in connection technology for CB ... device circuit breakers

## Drawings

## Thermomagnetic device circuit breaker - CB TM1 5A SFB P - 2800840


Diagram

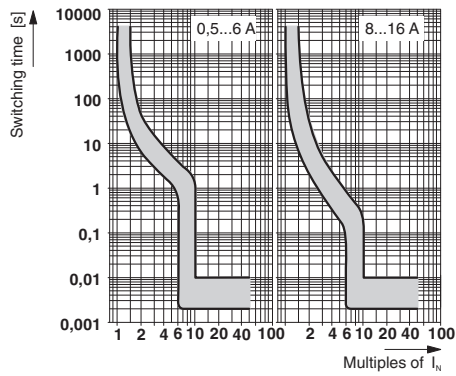

Trigger characteristic in the DC range

## Thermomagnetic device circuit breaker - CB TM1 5A SFB P - 2800840

Dimensioned drawing

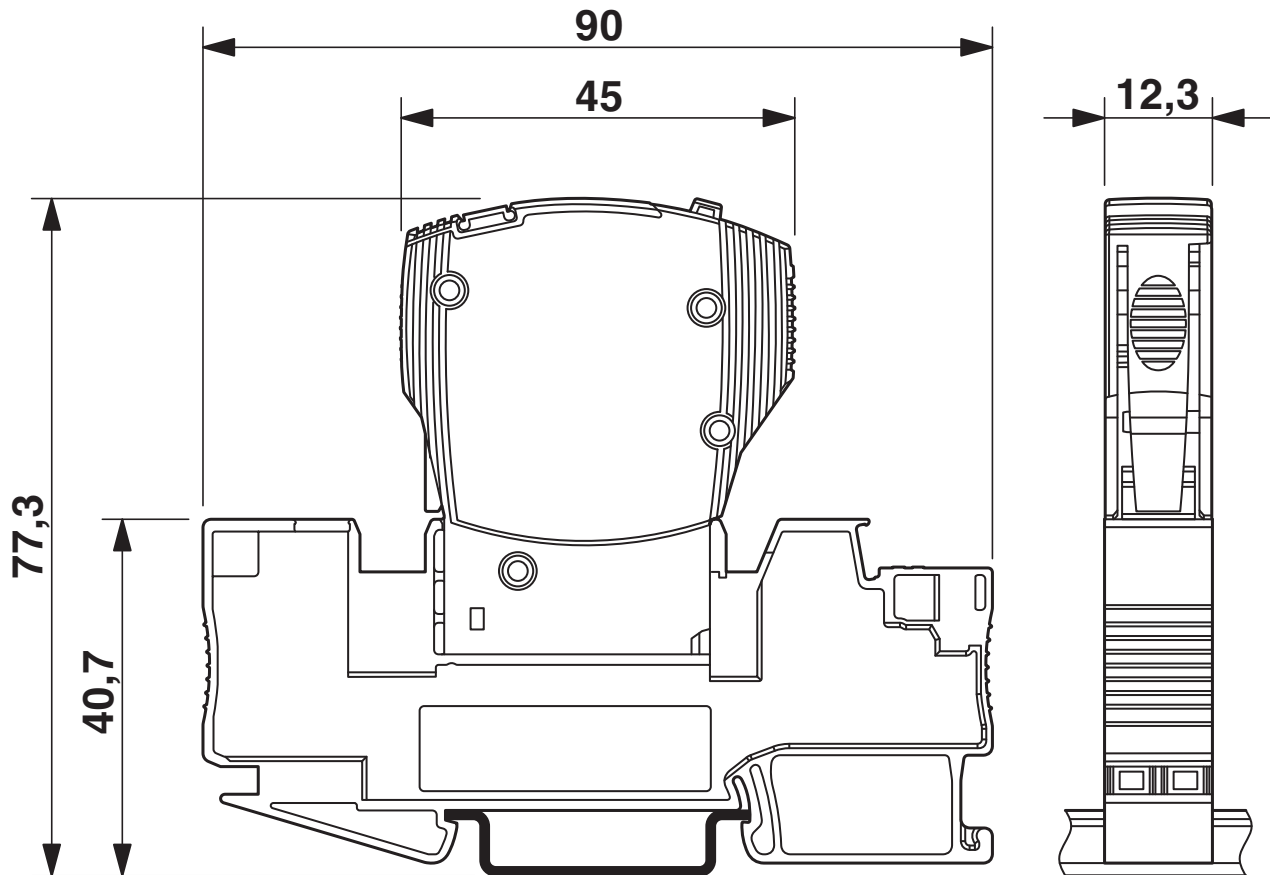

The figure shows the complete module consisting of a base element and connector



## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9