


**MODEL:** PJ-036BH-SMT-TR | **DESCRIPTION:** DC POWER JACK**FEATURES**

- 2.5mm center pin
- 5.0 A rating
- horizontal orientation
- surface mount (SMT)

**SPECIFICATIONS**

| parameter                       | conditions/description                                                   | min | typ   | max      | units    |
|---------------------------------|--------------------------------------------------------------------------|-----|-------|----------|----------|
| rated input voltage             |                                                                          |     | 24    |          | Vdc      |
| rated input current             |                                                                          |     |       | 5        | A        |
| contact resistance <sup>1</sup> | between terminal and mating plug<br>between terminal in a closed circuit |     |       | 50<br>30 | mΩ<br>mΩ |
| insulation resistance           | at 500 Vdc                                                               | 100 |       |          | MΩ       |
| voltage withstand               | for 1 minute                                                             |     |       | 500      | Vac      |
| insertion/withdrawal force      |                                                                          | 0.3 |       | 3        | kg       |
| operating temperature           |                                                                          | -25 |       | 85       | °C       |
| life                            | at a rate of 24 cycles/minute                                            |     | 5,000 |          | cycles   |
| flammability rating             | UL94V-0                                                                  |     |       |          |          |
| RoHS                            | yes                                                                      |     |       |          |          |

Note: 1. When measured at a current of less than 100 mA/1 kHz  
2. All specifications measured at 10~35°C, humidity at 45~85%, under standard atmospheric pressure, unless otherwise noted.

**SOLDERABILITY**

| parameter                      | conditions/description                                                                                   | min | typ | max | units |
|--------------------------------|----------------------------------------------------------------------------------------------------------|-----|-----|-----|-------|
| reel storage                   | at relative humidity <80%                                                                                |     |     | 40  | °C    |
| reflow soldering <sup>3</sup>  | see reflow profile                                                                                       | 255 | 260 | 265 | °C    |
| drying conditions <sup>4</sup> | parts in reel: bake at 40°C ±5°C for 72 hours<br>parts removed from reel: bake at 40°C ±5°C for 10 hours |     |     |     |       |


Note: 3. Must reflow solder within 72 hours from opening vacuum packaging at a temperature <30°C & relative humidity <60%.  
4. When exceeding floor life by >72 hours.



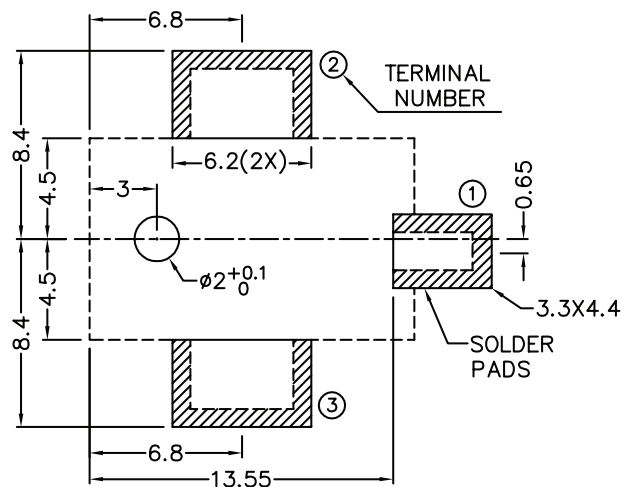
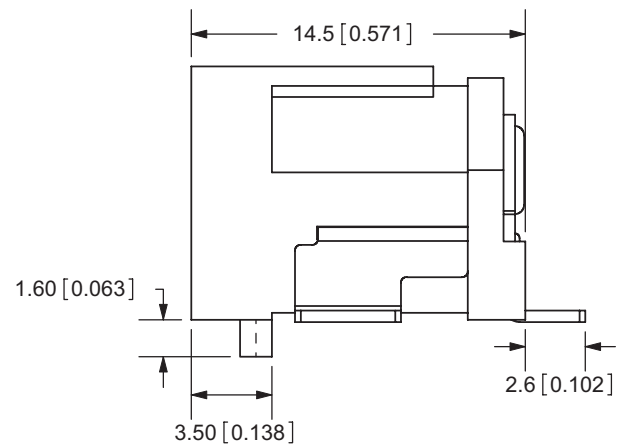
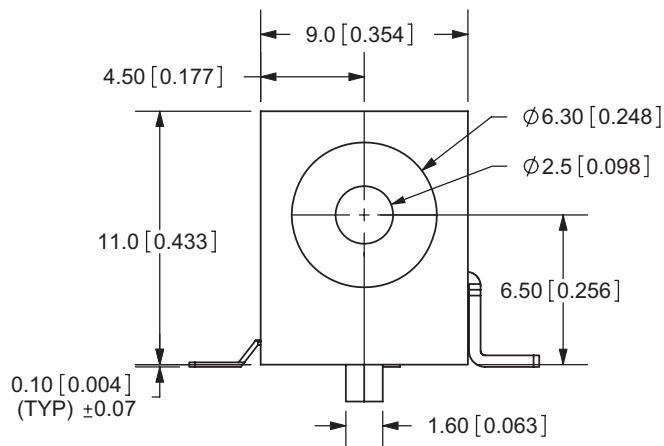

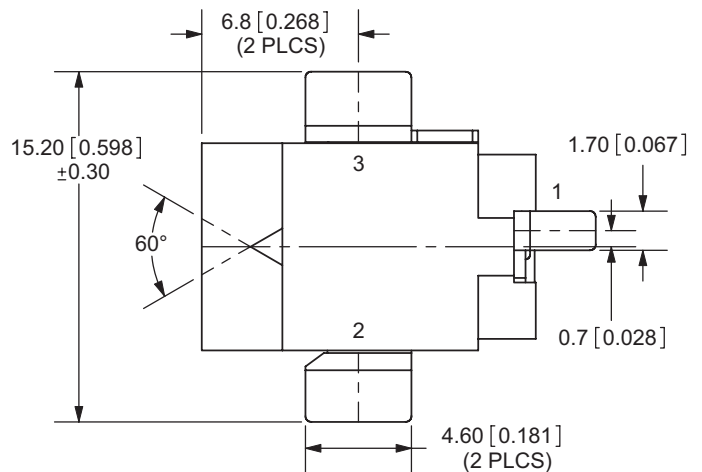
## MECHANICAL DRAWING

units: mm[inches]

tolerance:

X.X  $\pm 0.2$ mmX.XX  $\pm 0.1$ mmX.XXX  $\pm 0.05$ mmPCB:  $\pm 0.05$  mm

|            | MATERIAL           | PLATING |
|------------|--------------------|---------|
| center pin | copper             | nickel  |
| terminal 1 | brass              | silver  |
| terminal 2 | copper alloy       | silver  |
| terminal 3 | brass              | silver  |
| plastic    | PA6T or equivalent |         |

Recommended PCB Layout  
Top ViewMATING PLUG  
Jack Insertion Depth: 9.15 mm

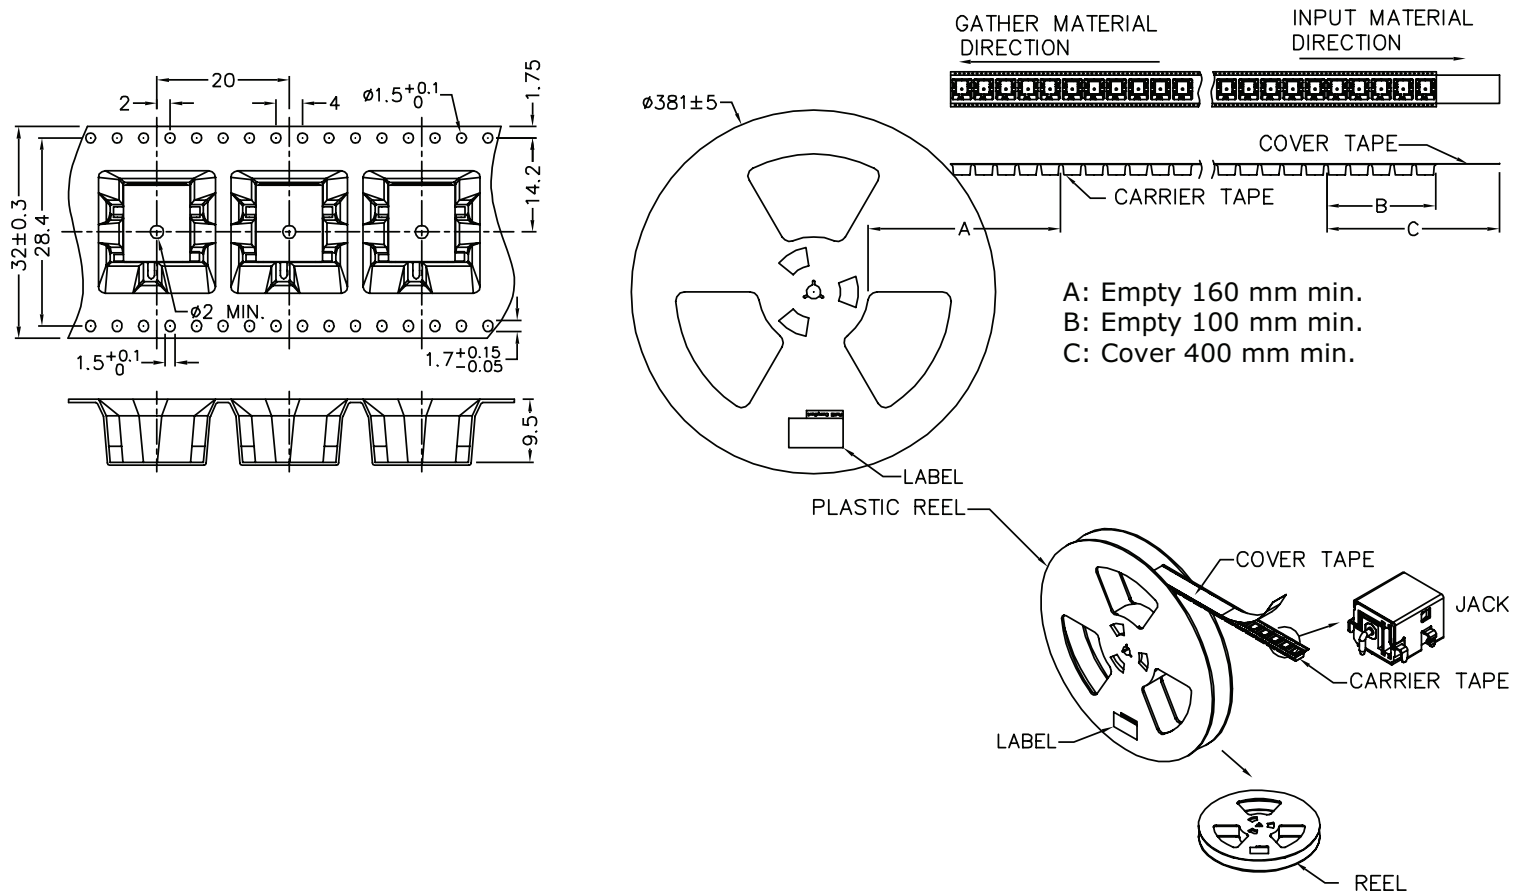
|            |              |
|------------|--------------|
| SCHEMATIC  |              |
| Model      | PJ-036BH-SMT |
| Center Pin | Ø2.5 mm      |

## PACKAGING

units: mm

Reel Size:  $\varnothing 381$  mm

Reel QTY: 200 pcs per reel



## REVISION HISTORY

| rev. | description                                                              | date       |
|------|--------------------------------------------------------------------------|------------|
| 1.0  | initial release                                                          | 02/02/2007 |
| 1.01 | added TR package option                                                  | 11/07/2012 |
| 1.02 | applied new spec template, updated center pin material                   | 08/21/2013 |
| 1.03 | increased voltage rating                                                 | 04/14/2016 |
| 1.04 | added storage and drying conditions, and tape and reel packaging details | 10/17/2017 |
| 1.05 | brand update                                                             | 11/06/2019 |

The revision history provided is for informational purposes only and is believed to be accurate.

---

# CUI DEVICES

CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9