

2N5954 2N5955 2N5956 PNP
2N6372 2N6373 2N6374 NPN

**COMPLEMENTARY SILICON
POWER TRANSISTORS**



TO-66 CASE



www.centralemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 2N5954 and 2N6372 series devices are complementary silicon power transistors manufactured by the epitaxial base process, mounted in a hermetically sealed metal case designed for general purpose amplifier and switching applications.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: ($T_C=25^\circ\text{C}$)

Collector-Base Voltage
Collector-Emitter Voltage
Collector-Emitter Voltage
Collector-Emitter Voltage
Emitter-Base Voltage
Continuous Collector Current
Continuous Base Current
Power Dissipation
Operating and Storage Junction Temperature
Thermal Resistance

SYMBOL	2N5954	2N5955	2N5956	UNITS
	2N6372	2N6373	2N6374	
V_{CBO}	90	70	50	V
V_{CEV}	90	70	50	V
V_{CER}	85	65	45	V
V_{CEO}	80	60	40	V
V_{EBO}		5.0		V
I_C		6.0		A
I_B		2.0		A
P_D		40		W
T_J, T_{stg}		-65 to +200		$^\circ\text{C}$
θ_{JC}		4.3		$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS: ($T_C=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	2N5954		2N5955		2N5956		UNITS
		2N6372	2N6373	2N6373	2N6374	2N6374	2N6374	
		MIN	MAX	MIN	MAX	MIN	MAX	
I_{CEV}	$V_{CE}=85\text{V}, V_{BE}=1.5\text{V}, R_{BE}=100\Omega$	-	100	-	-	-	-	μA
I_{CEV}	$V_{CE}=65\text{V}, V_{BE}=1.5\text{V}, R_{BE}=100\Omega$	-	-	-	100	-	-	μA
I_{CEV}	$V_{CE}=45\text{V}, V_{BE}=1.5\text{V}, R_{BE}=100\Omega$	-	-	-	-	-	100	μA
I_{CEV}	$V_{CE}=85\text{V}, V_{BE}=1.5\text{V}, R_{BE}=100\Omega, T_C=150^\circ\text{C}$	-	2.0	-	-	-	-	mA
I_{CEV}	$V_{CE}=65\text{V}, V_{BE}=1.5\text{V}, R_{BE}=100\Omega, T_C=150^\circ\text{C}$	-	-	-	2.0	-	-	mA
I_{CEV}	$V_{CE}=45\text{V}, V_{BE}=1.5\text{V}, R_{BE}=100\Omega, T_C=150^\circ\text{C}$	-	-	-	-	-	2.0	mA
I_{CER}	$V_{CE}=75\text{V}$	-	100	-	-	-	-	μA
I_{CER}	$V_{CE}=55\text{V}$	-	-	-	100	-	-	μA
I_{CER}	$V_{CE}=35\text{V}$	-	-	-	-	-	100	μA
I_{CEO}	$V_{CE}=65\text{V}$	-	1.0	-	-	-	-	mA
I_{CEO}	$V_{CE}=45\text{V}$	-	-	-	1.0	-	-	mA
I_{CEO}	$V_{CE}=25\text{V}$	-	-	-	-	-	1.0	mA
I_{EBO}	$V_{BE}=5.0\text{V}$	-	0.1	-	0.1	-	0.1	mA
BV_{CEV}	$I_C=100\text{mA}, V_{BE}=1.5\text{V}, R_{BE}=100\Omega$	90	-	70	-	50	-	V
BV_{CER}	$I_C=100\text{mA}, R_{BE}=100\Omega$	85	-	65	-	45	-	V
BV_{CEO}	$I_C=100\text{mA}$	80	-	60	-	40	-	V

R2 (2-September 2014)

2N5954 2N5955 2N5956 PNP
2N6372 2N6373 2N6374 NPN


**COMPLEMENTARY SILICON
POWER TRANSISTORS**



ELECTRICAL CHARACTERISTICS - Continued: ($T_C=25^{\circ}\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	2N5954 2N6372		2N5955 2N6373		2N5956 2N6374		UNITS
		MIN	MAX	MIN	MAX	MIN	MAX	
$V_{CE(SAT)}$	$I_C=2.0\text{A}$, $I_B=200\text{mA}$	-	1.0	-	-	-	-	V
$V_{CE(SAT)}$	$I_C=2.5\text{A}$, $I_B=250\text{mA}$	-	-	-	1.0	-	-	V
$V_{CE(SAT)}$	$I_C=3.0\text{A}$, $I_B=300\text{mA}$	-	-	-	-	-	1.0	V
$V_{CE(SAT)}$	$I_C=6.0\text{A}$, $I_B=1.2\text{A}$ (PNP types)	-	2.0	-	2.0	-	2.0	V
$V_{BE(ON)}$	$V_{CE}=4.0\text{V}$, $I_C=2.0\text{A}$	-	2.0	-	-	-	-	V
$V_{BE(ON)}$	$V_{CE}=4.0\text{V}$, $I_C=2.5\text{A}$	-	-	-	2.0	-	-	V
$V_{BE(ON)}$	$V_{CE}=4.0\text{V}$, $I_C=3.0\text{A}$	-	-	-	-	-	2.0	V
$V_{BE(ON)}$	$V_{CE}=4.0\text{V}$, $I_C=6.0\text{A}$ (NPN types)	-	3.0	-	3.0	-	3.0	V
h_{FE}	$V_{CE}=4.0\text{V}$, $I_C=2.0\text{A}$	20	100	-	-	-	-	
h_{FE}	$V_{CE}=4.0\text{V}$, $I_C=2.5\text{A}$	-	-	20	100	-	-	
h_{FE}	$V_{CE}=4.0\text{V}$, $I_C=3.0\text{A}$	-	-	-	-	20	100	
h_{FE}	$V_{CE}=4.0\text{V}$, $I_C=6.0\text{A}$	5.0	-	5.0	-	5.0	-	
h_{fe}	$V_{CE}=4.0\text{V}$, $I_C=0.5\text{A}$, $f=1.0\text{kHz}$	25	-	25	-	25	-	
f_T	$V_{CE}=4.0\text{V}$, $I_C=1.0\text{A}$, $f=1.0\text{MHz}$ (NPN types)	4.0	-	4.0	-	4.0	-	MHz
f_T	$V_{CE}=4.0\text{V}$, $I_C=1.0\text{A}$, $f=1.0\text{MHz}$ (PNP types)	5.0	-	5.0	-	5.0	-	MHz

TO-66 CASE - MECHANICAL OUTLINE

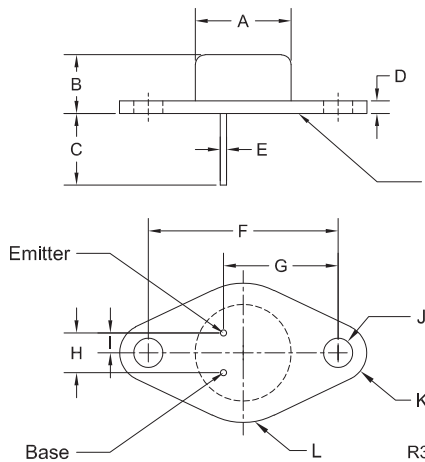

Seating Plane:
The seating plane must be
within 0.001" concave to
0.004" convex within
0.600" diameter from the
center of the device.

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.470	0.500	11.94	12.70
B	0.250	0.340	6.35	8.64
C	0.360	-	9.14	-
D	0.050	0.075	1.27	1.91
E (DIA)	0.028	0.034	0.71	0.86
F	0.956	0.964	24.28	24.48
G	0.570	0.590	14.48	14.99
H	0.190	0.210	4.83	5.33
I	0.093	0.107	2.36	2.72
J (DIA)	0.142	0.152	3.61	3.86
K (RAD)	0.141		3.58	
L (RAD)	0.345		8.76	

TO-66 (REV:R3)

**MARKING:
FULL PART NUMBER**

R2 (2-September 2014)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9