

# ATF-331M4

## Low Noise Pseudomorphic HEMT in a Miniature Leadless Package



### Data Sheet

#### Description

Avago Technologies's ATF-331M4 is a high linearity, low noise PHEMT housed in a miniature leadless package.


The ATF-331M4's small size and low profile makes it ideal for the design of hybrid modules and other space-constraint devices.

Based on its featured performance, ATF-331M4 is ideal for the first or second stage of base station LNA due to the excellent combination of low noise figure and enhanced linearity<sup>[1]</sup>. The device is also suitable for applications in Wireless LAN, WLL/RLL, MMDS, and other systems requiring super low noise figure with good intercept in the 450 MHz to 10 GHz frequency range.


#### Note:

1. From the same PHEMT FET family, the smaller geometry ATF-34143 may also be considered for the higher gain performance, particularly in the higher frequency band (1.8 GHz and up).

#### MiniPak 1.4 mm x 1.2 mm Package

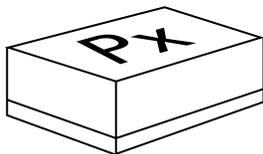

#### Pin Connections and Package Marking

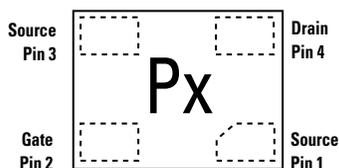

#### Note:

Top View. Package marking provides orientation, product identification and date code.

"P" = Device Type Code

"X" = Date code character. A different character is assigned for each month and year.

#### Features

- Low noise figure
- Excellent uniformity in product specifications
- 1600 micron gate width
- Miniature leadless package 1.4 mm x 1.2 mm x 0.7 mm
- Tape-and-reel packaging option available

#### Specifications

##### 2 GHz; 4 V, 60 mA (Typ.)

- 0.6 dB noise figure
- 15 dB associated gain
- 19 dBm output power at 1 dB gain compression
- 31 dBm output 3<sup>rd</sup> order intercept

#### Applications

- Tower mounted amplifier, low noise amplifier and driver amplifier for GSM/TDMA/CDMA base stations
- LNA for WLAN, WLL/RLL, MMDS and wireless data infrastructures
- General purpose discrete PHEMT for other ultra low noise applications

## ATF-331M4 Absolute Maximum Ratings<sup>[1]</sup>

| Symbol        | Parameter                              | Units | Absolute Maximum          |
|---------------|--|-------|---------------------------|
| $V_{DS}$      | Drain-Source Voltage <sup>[2]</sup>    | V     | 5.5                       |
| $V_{GS}$      | Gate-Source Voltage <sup>[2]</sup>     | V     | -5                        |
| $V_{GD}$      | Gate Drain Voltage <sup>[2]</sup>      | V     | -5                        |
| $I_{DS}$      | Drain Current <sup>[2]</sup>           | mA    | $I_{diss}$ <sup>[3]</sup> |
| $P_{diss}$    | Total Power Dissipation <sup>[4]</sup> | mW    | 400                       |
| $P_{in\ max}$ | RF Input Power                         | dBm   | 20                        |
| $T_{CH}$      | Channel Temperature <sup>[5]</sup>     | °C    | 160                       |
| $T_{STG}$     | Storage Temperature                    | °C    | -65 to 160                |
| $\theta_{jc}$ | Thermal Resistance <sup>[6]</sup>      | °C/W  | 200                       |

### Notes:

1. Operation of this device above any one of these parameters may cause permanent damage.
2. Assumes DC quiescent conditions.
3.  $V_{GS} = 0\text{ V}$
4. Source lead temperature is 25°C. Derate 5 mW/°C for  $T_L > 40^\circ\text{C}$ .
5. Please refer to failure rates in reliability data sheet to assess the reliability impact of running devices above a channel temperature of 140°C.
6. Thermal resistance measured using 150°C Liquid Crystal Measurement method.

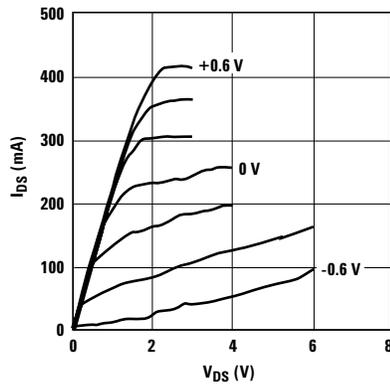


Figure 1. Typical Pulsed I-V Curves<sup>[7]</sup>.  
( $V_{GS} = -0.2\text{ V}$  per step)

### Note:

7. Under large signal conditions,  $V_{GS}$  may swing positive and the drain current may exceed  $I_{dss}$ . These conditions are acceptable as long as the Maximum  $P_{diss}$  and  $P_{in\ max}$  ratings are not exceeded.

## Product Consistency Distribution Charts<sup>[8, 9]</sup>

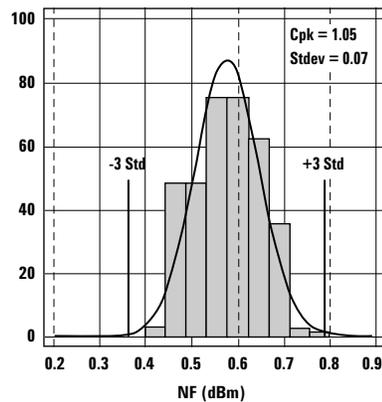


Figure 2. NF @ 2 GHz, 4 V, 60 mA.  
LSL = 28.5, Nominal = 0.6, USL = 0.8.

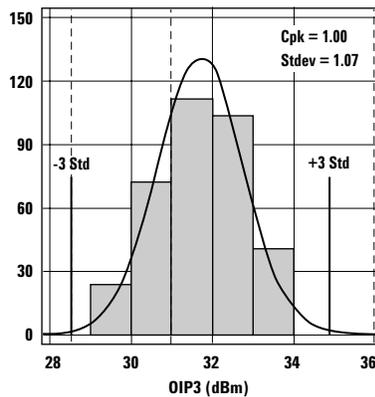


Figure 3. OIP3 @ 2 GHz, 4 V, 60 mA.  
LSL = 28.5, Nominal = 31.0, USL = 36.0

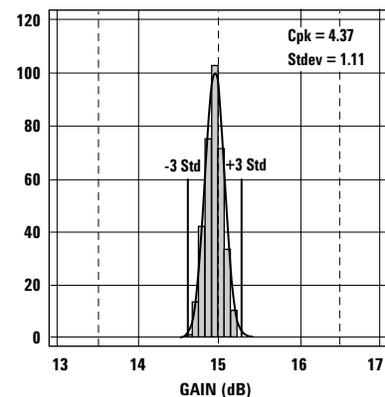


Figure 4. Gain @ 2 GHz, 4 V, 60 mA.  
LSL = 13.5, Nominal = 15.0, USL = 16.5

### Notes:

8. Distribution data sample size is 349 samples from 4 different wafers. Future wafers allocated to this product may have nominal values anywhere within the upper and lower spec limits.
9. Measurements made on production test board. This circuit represents a trade-off between an optimal noise match and a realizable match based on production test requirements. Circuit losses have been de-embedded from actual measurements.


## ATF-331M4 DC Electrical Specifications

$T_A = 25^\circ\text{C}$ , RF parameters measured in a test circuit for a typical device

| Symbol          | Parameter and Test Condition   | Units   | Min.  | Typ. <sup>[2]</sup> | Max.  |      |
|-----------------|--|---|-------|---------------------|-------|------|
| $I_{dss}^{[1]}$ | Saturated Drain Current<br>$V_{ds} = 1.5\text{V}, V_{gs} = 0\text{V}$          | mA  | 175   | 237                 | 305   |      |
| $V_p^{[1]}$     | Pinch-off Voltage<br>$V_{ds} = 1.5\text{V}, I_{ds} = 10\% \text{ of } I_{dss}$ | V   | -0.65 | -0.5                | -0.35 |      |
| $I_d$           | Quiescent Bias Current<br>$V_{gs} = -0.51\text{V}, V_{ds} = 4\text{V}$         | mA  | —     | 60                  | —     |      |
| $G_m^{[1]}$     | Transconductance<br>$V_{ds} = 1.5\text{V}, G_m = I_{dss}/V_p$                  | mmho  | 360   | 440                 | —     |      |
| $I_{gdo}$       | Gate to Drain Leakage Current<br>$V_{gd} = -5\text{V}$                         | $\mu\text{A}$   | —     | —                   | 1000  |      |
| $I_{gss}$       | Gate Leakage Current<br>$V_{gd} = V_{gs} = -4\text{V}$                         | $\mu\text{A}$   | —     | 42                  | 600   |      |
| NF              | Noise Figure   | $f = 2\text{ GHz}$<br>$V_{ds} = 4\text{V}, I_{ds} = 60\text{ mA}$                           | dB    | —                   | 0.6   | 0.8  |
|                 |  | $f = 900\text{ MHz}$<br>$V_{ds} = 4\text{V}, I_{ds} = 60\text{ mA}$                         | dB    | —                   | 0.5   | —    |
| Ga              | Associated Gain  | $f = 2\text{ GHz}$<br>$V_{ds} = 4\text{V}, I_{ds} = 60\text{ mA}$                           | dB    | 13.5                | 15    | 16.5 |
|                 |  | $f = 900\text{ MHz}$<br>$V_{ds} = 4\text{V}, I_{ds} = 60\text{ mA}$                         | dB    | —                   | 21    | —    |
| OIP3            | Output 3 <sup>rd</sup> Order Intercept Point <sup>[3]</sup>                    | $f = 2\text{ GHz}, 5\text{ dBm Pout/Tone}$<br>$V_{ds} = 4\text{V}, I_{ds} = 60\text{ mA}$   | dBm   | 28.5                | 31    | —    |
|                 |  | $f = 900\text{ MHz}, 5\text{ dBm Pout/Tone}$<br>$V_{ds} = 4\text{V}, I_{ds} = 60\text{ mA}$ | dBm   | —                   | 30.8  | —    |
| P1dB            | 1dB Compressed Output Power <sup>[3]</sup>                                     | $f = 2\text{ GHz}$<br>$V_{ds} = 4\text{V}, I_{ds} = 60\text{ mA}$                           | dBm   | —                   | 19    | —    |
|                 |  | $f = 900\text{ MHz}$<br>$V_{ds} = 4\text{V}, I_{ds} = 60\text{ mA}$                         | dBm   | —                   | 18    | —    |

### Notes:

1. Guaranteed at wafer probe level
2. Typical values are determined from a sample size of 349 parts from 4 wafers.
3. Measurements obtained using production test board described in Figure 5.

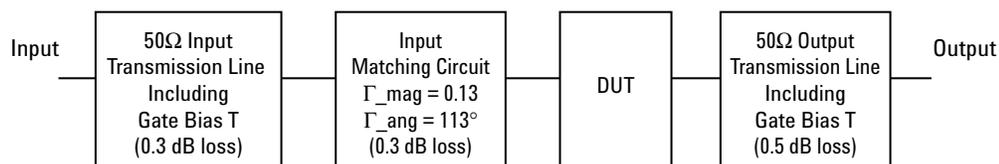

**Figure 5. Block diagram of 2 GHz production test board used for Noise Figure, Associated Gain, P1dB, and OIP3 measurements. This circuit represents a trade-off between an optimal noise match and a realizable match based on production test requirements. Circuit losses have been de-embedded from actual measurements.**

## ATF-331M4 Typical Performance Curves

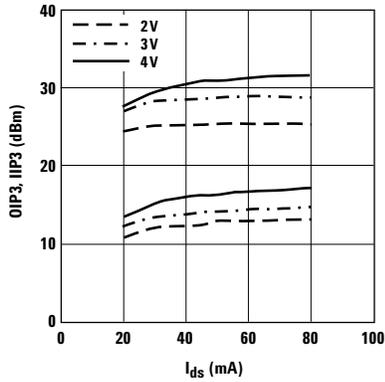


Figure 6. OIP3, IIP3 & Bias<sup>[1]</sup> at 2 GHz.

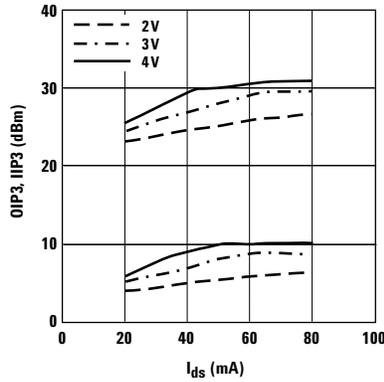


Figure 7. OIP3, IIP3 & Bias<sup>[1]</sup> at 900 MHz.

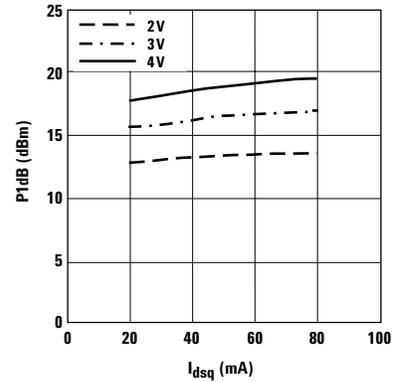


Figure 8. P1dB vs. Bias<sup>[1,2]</sup> 2 GHz.

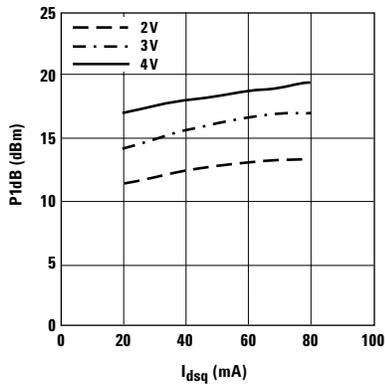


Figure 9. P1dB vs. Bias<sup>[1]</sup> 900 MHz.

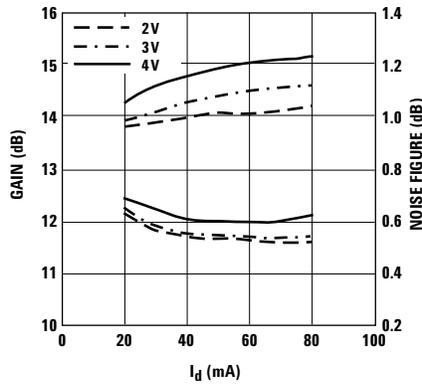


Figure 10. NF & Gain vs. Bias<sup>[1]</sup> at 2 GHz.


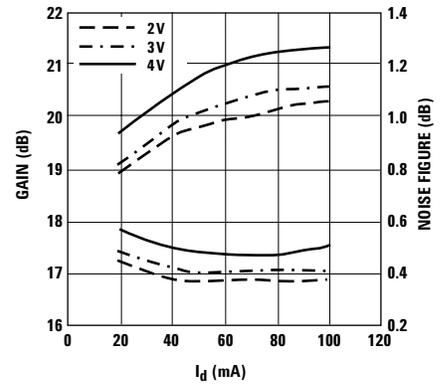


Figure 11. NF & Gain vs. Bias<sup>[1]</sup> at 900 MHz.


### Notes:

1. Measurements made on fixed tuned production test board that was tuned for optimal gain match with reasonable noise figure at 4V 60 mA bias. This circuit represents a trade-off between an optimal noise match, maximum gain match and a realizable match based on production test board requirements. Circuit losses have been de-embedded from actual measurements.
2. Quiescent drain current,  $I_{dsq}$ , is set with zero RF drive applied. As P1dB is approached, the drain current may increase or decrease depending on frequency and dc bias point. At lower values of  $I_{dsq}$  the device is running closer to class B as power output approaches P1dB. This results in higher P1dB and higher PAE (power added efficiency) when compared to a device that is driven by a constant current source as is typically done with active biasing.


**ATF-331M4 Typical Performance Curves, continued**

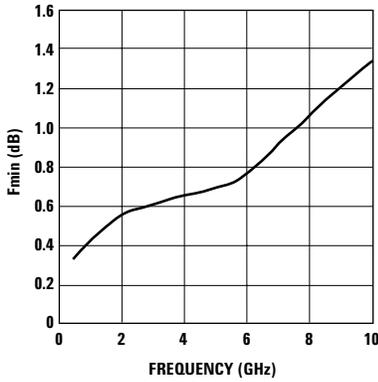


**Figure 12. Fmin vs. Frequency at 4 V, 60 mA.**

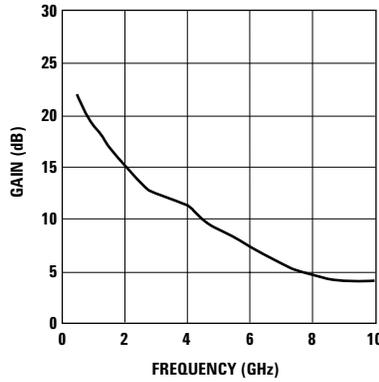


**Figure 13. Associated Gain vs. Frequency at 4V, 60 mA.**

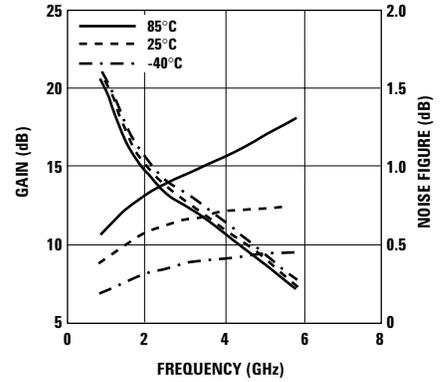


**Figure 14. Fmin & Ga vs. Frequency and Temp. Vd = 4V, Ids = 60 mA.**

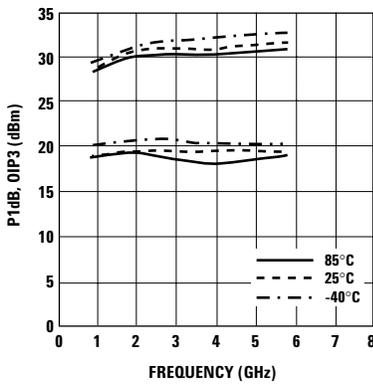

**Figure 15. P1dB, OIP3 vs. Frequency and Temp at Vd = 4V, Ids = 60 mA.**

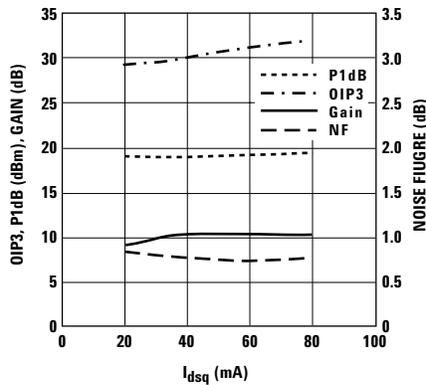

**Figure 16. OIP3, P1dB, NF and Gain vs. Bias<sup>(1,2)</sup> at 3.9 GHz.**

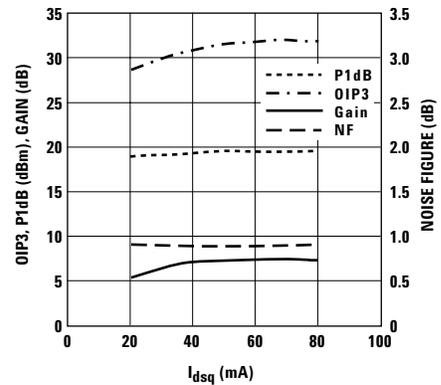

**Figure 17. OIP3, P1dB, NF at 5.8 GHz.**

**Notes:**


1. Measurements made on fixed tuned production test board that was tuned for optimal gain match with reasonable noise figure at 4V 60 mA bias. This circuit represents a trade-off between an optimal noise match, maximum gain match and a realizable match based on production test board requirements. Circuit losses have been de-embedded from actual measurements.
2. Quiescent drain current, Idsq, is set with zero RF drive applied. As P1dB is approached, the drain current may increase or decrease depending on frequency and dc bias point. At lower values of Idsq the device is running closer to class B as power output approaches P1dB. This results in higher P1dB and higher PAE (power added efficiency) when compared to a device that is driven by a constant current source as is typically done with active biasing.

**ATF-331M4 Typical Scattering Parameters,  $V_{DS} = 2V, I_{DS} = 40\text{ mA}$**

| Freq.<br>GHz | $S_{11}$ |         |       | $S_{21}$ |        |        | $S_{12}$ |        |      | $S_{22}$ |       | MSG/MAG<br>dB |
|--------------|----------|---------|-------|----------|--------|--------|----------|--------|------|----------|-------|---------------|
|              | Mag.     | Ang.    | dB    | Mag.     | Ang.   | dB     | Mag.     | Ang.   | Mag. | Ang.     |       |               |
| 0.5          | 0.82     | -91.90  | 22.10 | 12.74    | 127.90 | -27.13 | 0.044    | 53.30  | 0.40 | -163.10  | 24.62 |               |
| 0.8          | 0.79     | -119.10 | 18.85 | 8.76     | 112.80 | -25.19 | 0.055    | 46.70  | 0.47 | -169.67  | 22.02 |               |
| 1.0          | 0.78     | -132.10 | 18.06 | 8.00     | 106.00 | -24.44 | 0.060    | 44.70  | 0.49 | -173.83  | 21.25 |               |
| 1.5          | 0.76     | -151.40 | 14.75 | 5.46     | 93.73  | -22.73 | 0.073    | 42.73  | 0.53 | 177.77   | 18.74 |               |
| 1.8          | 0.75     | -159.60 | 13.55 | 4.76     | 88.20  | -21.72 | 0.082    | 42.13  | 0.53 | 173.73   | 17.64 |               |
| 2.0          | 0.74     | -163.60 | 13.36 | 4.65     | 85.00  | -21.31 | 0.086    | 41.93  | 0.54 | 171.27   | 17.33 |               |
| 2.5          | 0.72     | -170.70 | 10.33 | 3.29     | 77.97  | -20.09 | 0.099    | 41.33  | 0.53 | 165.20   | 15.21 |               |
| 3.0          | 0.69     | -174.30 | 9.60  | 3.02     | 71.83  | -18.12 | 0.124    | 40.57  | 0.55 | 162.60   | 13.86 |               |
| 4.0          | 0.71     | 163.10  | 6.62  | 2.14     | 53.23  | -17.20 | 0.138    | 30.30  | 0.56 | 138.03   | 10.77 |               |
| 5.0          | 0.73     | 150.00  | 4.98  | 1.77     | 41.60  | -16.65 | 0.147    | 24.97  | 0.56 | 134.30   | 9.25  |               |
| 6.0          | 0.71     | 140.90  | 3.94  | 1.57     | 28.80  | -16.08 | 0.157    | 17.23  | 0.57 | 115.73   | 7.71  |               |
| 7.0          | 0.73     | 123.90  | 2.92  | 1.40     | 14.70  | -15.39 | 0.170    | 7.10   | 0.57 | 109.93   | 6.97  |               |
| 8.0          | 0.74     | 112.90  | 2.77  | 1.38     | 6.70   | -15.04 | 0.177    | 2.57   | 0.58 | 108.90   | 6.98  |               |
| 9.0          | 0.76     | 97.70   | 2.60  | 1.35     | -4.77  | -14.99 | 0.178    | -6.27  | 0.59 | 93.03    | 6.78  |               |
| 10.0         | 0.79     | 83.60   | 2.00  | 1.26     | -18.20 | -14.75 | 0.183    | -17.47 | 0.59 | 78.30    | 6.54  |               |
| 11.0         | 0.86     | 61.90   | 0.08  | 1.01     | -32.50 | -14.80 | 0.182    | -29.77 | 0.58 | 66.00    | 6.03  |               |
| 12.0         | 0.87     | 62.10   | -0.71 | 0.92     | -37.90 | -14.33 | 0.192    | -33.90 | 0.65 | 59.73    | 5.63  |               |
| 13.0         | 0.88     | 51.90   | -1.54 | 0.84     | -49.90 | -14.89 | 0.180    | -44.67 | 0.69 | 49.07    | 5.20  |               |
| 14.0         | 0.88     | 44.60   | -2.09 | 0.79     | -58.90 | -15.44 | 0.169    | -52.47 | 0.73 | 40.13    | 5.04  |               |
| 15.0         | 0.91     | 38.70   | -4.00 | 0.63     | -67.70 | -15.81 | 0.162    | -60.63 | 0.75 | 30.57    | 4.34  |               |
| 16.0         | 0.93     | 33.30   | -5.66 | 0.52     | -74.80 | -18.71 | 0.116    | -67.27 | 0.78 | 24.73    | 4.04  |               |
| 17.0         | 0.93     | 28.40   | -5.68 | 0.52     | -80.50 | -17.86 | 0.128    | -73.07 | 0.79 | 18.67    | 4.02  |               |
| 18.0         | 0.92     | 25.20   | -6.58 | 0.47     | -84.00 | -17.99 | 0.126    | -77.40 | 0.81 | 13.87    | 3.03  |               |

**Typical Noise Parameters,  $V_{DS} = 2V, I_{DS} = 40\text{ mA}$**

| Freq<br>GHz | $F_{min}$<br>dB | $\Gamma_{opt}$<br>Mag. | $\Gamma_{opt}$<br>Ang. | $R_n/50$ | $G_a$<br>dB |
|-------------|-----------------|------------------------|------------------------|----------|-------------|
| 0.50        | 0.37            | 0.39                   | 0.6                    | 0.07     | 21.16       |
| 0.90        | 0.41            | 0.381                  | 26.3                   | 0.06     | 18.36       |
| 1.00        | 0.41            | 0.38                   | 32.9                   | 0.06     | 18.19       |
| 1.50        | 0.46            | 0.38                   | 63.6                   | 0.05     | 15.96       |
| 1.80        | 0.48            | 0.385                  | 80                     | 0.05     | 15.43       |
| 2.00        | 0.5             | 0.39                   | 90.1                   | 0.05     | 14.56       |
| 2.50        | 0.54            | 0.407                  | 112.8                  | 0.04     | 13.29       |
| 3.00        | 0.59            | 0.431                  | 132                    | 0.04     | 12.18       |
| 4.00        | 0.67            | 0.492                  | 161.3                  | 0.03     | 10.4        |
| 5.00        | 0.76            | 0.565                  | -179                   | 0.02     | 8.94        |
| 6.00        | 0.85            | 0.638                  | -166                   | 0.02     | 7.96        |
| 7.00        | 0.93            | 0.702                  | -156.9                 | 0.04     | 7           |
| 8.00        | 1.02            | 0.747                  | -148.9                 | 0.07     | 6.16        |
| 9.00        | 1.11            | 0.762                  | -139                   | 0.11     | 5.8         |
| 10.00       | 1.19            | 0.737                  | -124.5                 | 0.18     | 4.89        |

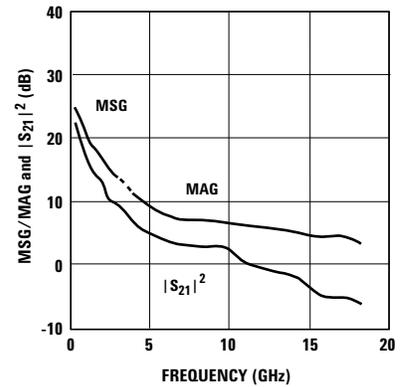

**Figure 18. MSG/MAG and  $|S_{21}|^2$  vs. Frequency at 2V, 40 mA.**

**Notes:**


1. The  $F_{min}$  values are based on a set of 16 noise figure measurements made at 16 different impedances using an ATN NP5 test system. From these measurements  $F_{min}$  is calculated. Refer to the noise parameter measurement section for more information.
2. S and noise parameters are measured on a microstrip line made on 0.010 inch thick alumina carrier assembly. The input reference plane is at the end of the gate pad. The output reference plane is at the end of the drain pad.

**ATF-331M4 Typical Scattering Parameters,  $V_{DS} = 3V, I_{DS} = 40\text{ mA}$**

| Freq.<br>GHz | $S_{11}$ |         |       | $S_{21}$ |        |        | $S_{12}$ |        | $S_{22}$ |         | MSG/MAG<br>dB |
|--------------|----------|---------|-------|----------|--------|--------|----------|--------|----------|---------|---------------|
|              | Mag.     | Ang.    | dB    | Mag.     | Ang.   | dB     | Mag.     | Ang.   | Mag.     | Ang.    |               |
| 0.5          | 0.82     | -90.50  | 22.45 | 13.27    | 128.40 | -27.54 | 0.042    | 53.80  | 0.38     | -155.50 | 24.99         |
| 0.8          | 0.78     | -117.70 | 19.31 | 9.24     | 113.30 | -25.35 | 0.054    | 47.10  | 0.44     | -165.77 | 22.33         |
| 1.0          | 0.77     | -130.90 | 18.50 | 8.41     | 106.40 | -24.58 | 0.059    | 45.10  | 0.46     | -170.63 | 21.54         |
| 1.5          | 0.75     | -150.40 | 15.23 | 5.77     | 93.93  | -22.97 | 0.071    | 43.03  | 0.49     | 180.17  | 19.10         |
| 1.8          | 0.74     | -158.70 | 14.02 | 5.02     | 88.30  | -21.94 | 0.080    | 42.33  | 0.49     | -184.17 | 17.98         |
| 2.0          | 0.74     | -162.70 | 13.79 | 4.89     | 85.10  | -21.51 | 0.084    | 42.13  | 0.50     | 173.27  | 17.65         |
| 2.5          | 0.72     | -170.00 | 10.81 | 3.47     | 77.97  | -20.18 | 0.098    | 41.53  | 0.50     | 166.80  | 15.49         |
| 3.0          | 0.69     | -174.10 | 9.60  | 3.02     | 71.63  | -18.24 | 0.122    | 40.67  | 0.52     | 163.70  | 13.92         |
| 4.0          | 0.71     | 163.70  | 7.13  | 2.27     | 53.03  | -17.33 | 0.136    | 30.70  | 0.52     | 139.43  | 11.20         |
| 5.0          | 0.73     | 150.50  | 5.46  | 1.87     | 41.40  | -16.83 | 0.144    | 25.67  | 0.52     | 136.10  | 9.63          |
| 6.0          | 0.71     | 141.50  | 4.37  | 1.65     | 28.50  | -16.31 | 0.153    | 18.13  | 0.54     | 118.23  | 8.02          |
| 7.0          | 0.73     | 124.40  | 3.34  | 1.47     | 14.10  | -15.55 | 0.167    | 8.10   | 0.54     | 111.83  | 7.28          |
| 8.0          | 0.74     | 113.40  | 3.14  | 1.44     | 6.00   | -15.19 | 0.174    | 3.57   | 0.54     | 110.90  | 7.28          |
| 9.0          | 0.76     | 98.20   | 2.94  | 1.40     | -5.57  | -15.14 | 0.175    | -4.97  | 0.55     | 95.33   | 7.05          |
| 10.0         | 0.79     | 84.10   | 2.33  | 1.31     | -19.10 | -14.94 | 0.179    | -16.07 | 0.55     | 80.50   | 6.83          |
| 11.0         | 0.86     | 62.40   | 0.44  | 1.05     | -33.40 | -14.94 | 0.179    | -28.27 | 0.55     | 67.80   | 6.40          |
| 12.0         | 0.87     | 62.50   | -0.38 | 0.96     | -38.90 | -14.47 | 0.189    | -32.20 | 0.61     | 61.73   | 6.00          |
| 13.0         | 0.88     | 52.30   | -1.20 | 0.87     | -50.90 | -14.99 | 0.178    | -42.87 | 0.66     | 50.97   | 5.55          |
| 14.0         | 0.89     | 44.90   | -1.79 | 0.81     | -60.20 | -15.55 | 0.167    | -50.87 | 0.70     | 41.63   | 5.33          |
| 15.0         | 0.91     | 39.00   | -3.64 | 0.66     | -69.10 | -15.81 | 0.162    | -59.03 | 0.73     | 32.17   | 4.81          |
| 16.0         | 0.93     | 33.40   | -5.30 | 0.54     | -76.40 | -18.64 | 0.117    | -65.67 | 0.76     | 26.13   | 4.49          |
| 17.0         | 0.93     | 28.50   | -5.40 | 0.54     | -82.40 | -17.79 | 0.129    | -71.87 | 0.78     | 19.77   | 4.48          |
| 18.0         | 0.92     | 25.10   | -6.34 | 0.48     | -86.10 | -17.92 | 0.127    | -76.40 | 0.80     | 14.87   | 3.39          |

**Typical Noise Parameters,  $V_{DS} = 3V, I_{DS} = 40\text{ mA}$**

| Freq<br>GHz | $F_{min}$<br>dB | $\Gamma_{opt}$<br>Mag. | $\Gamma_{opt}$<br>Ang. | $R_n/50$ | $G_a$<br>dB |
|-------------|-----------------|------------------------|------------------------|----------|-------------|
| 0.50        | 0.37            | 0.377                  | 0.7                    | 0.07     | 21.42       |
| 0.90        | 0.41            | 0.367                  | 24.5                   | 0.06     | 18.53       |
| 1.00        | 0.42            | 0.366                  | 31.1                   | 0.06     | 18.28       |
| 1.50        | 0.46            | 0.365                  | 61.6                   | 0.05     | 15.95       |
| 1.80        | 0.49            | 0.37                   | 77.8                   | 0.05     | 15.42       |
| 2.00        | 0.51            | 0.374                  | 87.9                   | 0.05     | 14.61       |
| 2.50        | 0.55            | 0.392                  | 110.5                  | 0.04     | 13.33       |
| 3.00        | 0.59            | 0.416                  | 129.6                  | 0.04     | 12.25       |
| 4.00        | 0.68            | 0.479                  | 159.2                  | 0.03     | 10.5        |
| 5.00        | 0.77            | 0.553                  | 179.4                  | 0.02     | 9.06        |
| 6.00        | 0.86            | 0.627                  | -167.2                 | 0.02     | 8.05        |
| 7.00        | 0.95            | 0.69                   | -157.6                 | 0.04     | 7.13        |
| 8.00        | 1.04            | 0.733                  | -149.2                 | 0.06     | 6.38        |
| 9.00        | 1.13            | 0.742                  | -139.1                 | 0.1      | 5.97        |
| 10.00       | 1.22            | 0.709                  | -124.7                 | 0.18     | 5           |

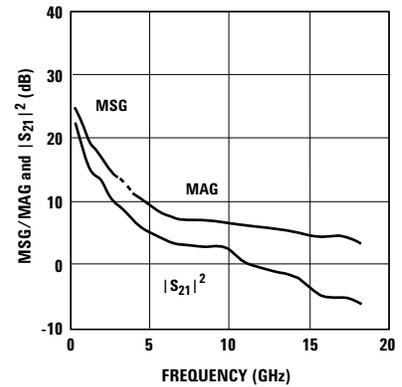

**Figure 19. MSG/MAG and  $|S_{21}|^2$  vs. Frequency at 3V, 40 mA.**

**Notes:**


1. The  $F_{min}$  values are based on a set of 16 noise figure measurements made at 16 different impedances using an ATN NP5 test system. From these measurements  $F_{min}$  is calculated. Refer to the noise parameter measurement section for more information.
2. S and noise parameters are measured on a microstrip line made on a 0.010 inch thick alumina carrier assembly. The input reference plane is at the end of the gate pad. The output reference plane is at the end of the drain pad.

**ATF-331M4 Typical Scattering Parameters,  $V_{DS} = 3V, I_{DS} = 60\text{ mA}$**

| Freq.<br>GHz | $S_{11}$ |         |       | $S_{21}$ |        |        | $S_{12}$ |        |      | $S_{22}$ |       | MSG/MAG<br>dB |
|--------------|----------|---------|-------|----------|--------|--------|----------|--------|------|----------|-------|---------------|
|              | Mag.     | Ang.    | dB    | Mag.     | Ang.   | dB     | Mag.     | Ang.   | Mag. | Ang.     |       |               |
| 0.5          | 0.81     | -93.60  | 22.93 | 14.01    | 127.00 | -28.64 | 0.037    | 54.00  | 0.39 | -167.20  | 25.78 |               |
| 0.8          | 0.78     | -120.70 | 19.68 | 9.64     | 112.10 | -26.56 | 0.047    | 48.30  | 0.46 | -172.07  | 23.12 |               |
| 1.0          | 0.77     | -133.60 | 18.81 | 8.72     | 105.40 | -25.68 | 0.052    | 46.80  | 0.48 | -175.73  | 22.24 |               |
| 1.5          | 0.75     | -152.50 | 15.50 | 5.96     | 93.43  | -23.88 | 0.064    | 46.03  | 0.51 | 176.57   | 19.69 |               |
| 1.8          | 0.74     | -160.50 | 14.27 | 5.17     | 88.00  | -22.73 | 0.073    | 45.93  | 0.51 | 172.73   | 18.50 |               |
| 2.0          | 0.74     | -164.40 | 14.02 | 5.02     | 84.80  | -22.16 | 0.078    | 46.03  | 0.52 | 170.47   | 18.09 |               |
| 2.5          | 0.72     | -171.30 | 11.06 | 3.57     | 77.97  | -20.72 | 0.092    | 45.93  | 0.52 | 164.60   | 15.89 |               |
| 3.0          | 0.70     | -175.30 | 9.80  | 3.09     | 71.93  | -18.40 | 0.120    | 45.37  | 0.53 | 161.90   | 14.10 |               |
| 4.0          | 0.71     | 162.70  | 7.39  | 2.34     | 53.33  | -17.52 | 0.133    | 35.20  | 0.54 | 137.43   | 11.21 |               |
| 5.0          | 0.73     | 149.70  | 5.70  | 1.93     | 41.90  | -16.95 | 0.142    | 29.87  | 0.54 | 134.20   | 9.70  |               |
| 6.0          | 0.71     | 140.60  | 4.61  | 1.70     | 29.10  | -16.31 | 0.153    | 21.73  | 0.55 | 116.23   | 8.18  |               |
| 7.0          | 0.73     | 123.70  | 3.54  | 1.50     | 15.10  | -15.55 | 0.167    | 11.40  | 0.56 | 110.13   | 7.39  |               |
| 8.0          | 0.74     | 112.70  | 3.33  | 1.47     | 7.10   | -15.09 | 0.176    | 6.37   | 0.56 | 109.10   | 7.35  |               |
| 9.0          | 0.76     | 97.60   | 3.12  | 1.43     | -4.37  | -15.04 | 0.177    | -2.77  | 0.57 | 93.43    | 7.16  |               |
| 10.0         | 0.79     | 83.40   | 2.52  | 1.34     | -17.80 | -14.75 | 0.183    | -14.27 | 0.57 | 78.70    | 6.95  |               |
| 11.0         | 0.86     | 61.80   | 0.66  | 1.08     | -32.10 | -14.80 | 0.182    | -26.87 | 0.57 | 66.20    | 6.68  |               |
| 12.0         | 0.87     | 62.00   | -0.15 | 0.98     | -37.60 | -14.29 | 0.193    | -31.00 | 0.63 | 60.03    | 6.21  |               |
| 13.0         | 0.88     | 52.00   | -0.96 | 0.90     | -49.50 | -14.80 | 0.182    | -41.97 | 0.68 | 49.47    | 5.74  |               |
| 14.0         | 0.89     | 44.50   | -1.56 | 0.84     | -58.70 | -15.34 | 0.171    | -50.27 | 0.71 | 40.23    | 5.55  |               |
| 15.0         | 0.92     | 38.80   | -3.38 | 0.68     | -67.60 | -15.65 | 0.165    | -58.43 | 0.74 | 30.87    | 5.16  |               |
| 16.0         | 0.94     | 33.20   | -5.04 | 0.56     | -74.90 | -18.42 | 0.120    | -65.47 | 0.77 | 25.03    | 4.92  |               |
| 17.0         | 0.94     | 28.20   | -5.15 | 0.55     | -80.90 | -17.65 | 0.131    | -71.67 | 0.78 | 18.87    | 4.96  |               |
| 18.0         | 0.93     | 24.60   | -6.11 | 0.50     | -84.90 | -17.79 | 0.129    | -76.30 | 0.80 | 14.17    | 3.76  |               |

**Typical Noise Parameters,  $V_{DS} = 3V, I_{DS} = 60\text{ mA}$**

| Freq<br>GHz | $F_{min}$<br>dB | $\Gamma_{opt}$<br>Mag. | $\Gamma_{opt}$<br>Ang. | $R_n/50$ | $G_a$<br>dB |
|-------------|-----------------|------------------------|------------------------|----------|-------------|
| 0.50        | 0.36            | 0.35                   | 0.2                    | 0.06     | 21.97       |
| 0.90        | 0.4             | 0.341                  | 24.3                   | 0.06     | 18.96       |
| 1.00        | 0.41            | 0.34                   | 31.1                   | 0.05     | 18.77       |
| 1.50        | 0.45            | 0.341                  | 62.5                   | 0.04     | 16.31       |
| 1.80        | 0.48            | 0.346                  | 79.3                   | 0.05     | 15.79       |
| 2.00        | 0.5             | 0.351                  | 89.6                   | 0.05     | 14.93       |
| 2.50        | 0.54            | 0.37                   | 112.8                  | 0.04     | 13.67       |
| 3.00        | 0.59            | 0.395                  | 132.4                  | 0.04     | 12.62       |
| 4.00        | 0.68            | 0.461                  | 162.3                  | 0.03     | 10.78       |
| 5.00        | 0.77            | 0.538                  | -177.6                 | 0.02     | 9.28        |
| 6.00        | 0.86            | 0.616                  | -164.4                 | 0.02     | 8.34        |
| 7.00        | 0.95            | 0.683                  | -155.3                 | 0.04     | 7.37        |
| 8.00        | 1.04            | 0.729                  | -147.2                 | 0.07     | 6.63        |
| 9.00        | 1.13            | 0.742                  | -137.3                 | 0.11     | 6.19        |
| 10.00       | 1.22            | 0.712                  | -122.6                 | 0.19     | 5.23        |

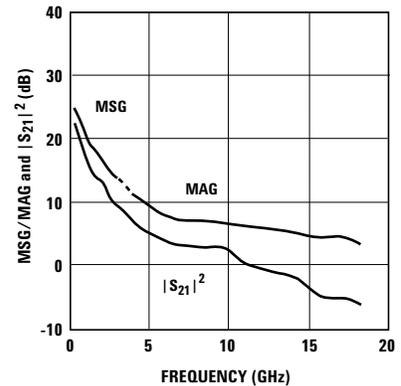

**Figure 20. MSG/MAG and  $|S_{21}|^2$  vs. Frequency at 3V, 60 mA.**

**Notes:**


1. The  $F_{min}$  values are based on a set of 16 noise figure measurements made at 16 different impedances using an ATN NP5 test system. From these measurements  $F_{min}$  is calculated. Refer to the noise parameter measurement section for more information.
2. S and noise parameters are measured on a microstrip line made on 0.010 inch thick alumina carrier assembly. The input reference plane is at the end of the gate pad. The output reference plane is at the end of the drain pad.

**ATF-331M4 Typical Scattering Parameters,  $V_{DS} = 4V$ ,  $I_{DS} = 40\text{ mA}$**

| Freq.<br>GHz | $S_{11}$ |         |       | $S_{21}$ |        |        | $S_{12}$ |        | $S_{22}$ |         | MSG/MAG<br>dB |
|--------------|----------|---------|-------|----------|--------|--------|----------|--------|----------|---------|---------------|
|              | Mag.     | Ang.    | dB    | Mag.     | Ang.   | dB     | Mag.     | Ang.   | Mag.     | Ang.    |               |
| 0.5          | 0.82     | -89.80  | 22.59 | 13.48    | 128.80 | -27.54 | 0.042    | 54.00  | 0.36     | -149.40 | 25.06         |
| 0.8          | 0.78     | -116.90 | 19.49 | 9.43     | 113.60 | -25.51 | 0.053    | 47.30  | 0.41     | -162.57 | 22.50         |
| 1.0          | 0.77     | -130.00 | 18.68 | 8.59     | 106.60 | -24.73 | 0.058    | 45.20  | 0.43     | -167.93 | 21.70         |
| 1.5          | 0.75     | -149.70 | 15.42 | 5.90     | 94.13  | -22.97 | 0.071    | 42.93  | 0.46     | -177.83 | 19.20         |
| 1.8          | 0.74     | -158.00 | 14.21 | 5.13     | 88.40  | -22.05 | 0.079    | 42.23  | 0.46     | 177.53  | 18.13         |
| 2.0          | 0.74     | -162.20 | 13.70 | 4.84     | 85.10  | -21.51 | 0.084    | 41.93  | 0.47     | 174.77  | 17.61         |
| 2.5          | 0.72     | -169.50 | 11.50 | 3.76     | 77.87  | -20.26 | 0.097    | 41.33  | 0.48     | 168.10  | 15.88         |
| 3.0          | 0.69     | -173.80 | 10.20 | 3.24     | 71.53  | -18.20 | 0.123    | 40.47  | 0.49     | 164.80  | 14.20         |
| 4.0          | 0.70     | 164.10  | 7.34  | 2.33     | 52.63  | -17.46 | 0.134    | 30.50  | 0.50     | 140.63  | 11.39         |
| 5.0          | 0.73     | 150.90  | 5.66  | 1.92     | 40.90  | -16.95 | 0.142    | 25.67  | 0.50     | 137.60  | 9.81          |
| 6.0          | 0.71     | 141.80  | 4.54  | 1.69     | 28.00  | -16.42 | 0.151    | 18.43  | 0.51     | 120.43  | 8.14          |
| 7.0          | 0.73     | 124.70  | 3.52  | 1.50     | 13.40  | -15.65 | 0.165    | 8.40   | 0.52     | 113.63  | 7.45          |
| 8.0          | 0.74     | 113.70  | 3.29  | 1.46     | 5.20   | -15.29 | 0.172    | 4.07   | 0.52     | 112.80  | 7.42          |
| 9.0          | 0.76     | 98.50   | 3.08  | 1.43     | -6.37  | -15.29 | 0.172    | -4.27  | 0.53     | 97.33   | 7.18          |
| 10.0         | 0.79     | 84.30   | 2.45  | 1.33     | -20.00 | -15.04 | 0.177    | -15.27 | 0.53     | 82.40   | 6.94          |
| 11.0         | 0.86     | 62.60   | 0.59  | 1.07     | -34.50 | -15.04 | 0.177    | -27.37 | 0.53     | 69.40   | 6.64          |
| 12.0         | 0.87     | 62.70   | -0.26 | 0.97     | -40.00 | -14.56 | 0.187    | -31.00 | 0.59     | 63.63   | 6.29          |
| 13.0         | 0.88     | 52.60   | -1.08 | 0.88     | -52.10 | -15.09 | 0.176    | -41.67 | 0.64     | 52.57   | 5.80          |
| 14.0         | 0.89     | 45.10   | -1.66 | 0.83     | -61.60 | -15.55 | 0.167    | -49.77 | 0.69     | 43.13   | 5.59          |
| 15.0         | 0.92     | 39.20   | -3.49 | 0.67     | -70.50 | -15.81 | 0.162    | -58.03 | 0.71     | 33.47   | 5.35          |
| 16.0         | 0.94     | 33.50   | -5.16 | 0.55     | -78.00 | -18.64 | 0.117    | -64.67 | 0.75     | 27.23   | 4.93          |
| 17.0         | 0.94     | 28.40   | -5.30 | 0.54     | -84.20 | -17.72 | 0.130    | -71.07 | 0.77     | 20.77   | 4.97          |
| 18.0         | 0.93     | 24.90   | -6.29 | 0.49     | -88.30 | -17.86 | 0.128    | -75.90 | 0.79     | 15.87   | 3.70          |

**Typical Noise Parameters,  $V_{DS} = 4V$ ,  $I_{DS} = 40\text{ mA}$**

| Freq<br>GHz | $F_{min}$<br>dB | $\Gamma_{opt}$<br>Mag. | $\Gamma_{opt}$<br>Ang. | $R_n/50$ | $G_a$<br>dB |
|-------------|-----------------|------------------------|------------------------|----------|-------------|
| 0.50        | 0.4             | 0.335                  | 0.5                    | 0.07     | 21.8        |
| 0.90        | 0.43            | 0.332                  | 27.9                   | 0.06     | 18.83       |
| 1.00        | 0.44            | 0.332                  | 34.3                   | 0.06     | 18.59       |
| 1.50        | 0.48            | 0.338                  | 63.8                   | 0.05     | 16.22       |
| 1.80        | 0.51            | 0.345                  | 79.6                   | 0.05     | 15.46       |
| 2.00        | 0.52            | 0.352                  | 89.3                   | 0.05     | 14.61       |
| 2.50        | 0.57            | 0.373                  | 111.3                  | 0.05     | 13.34       |
| 3.00        | 0.61            | 0.4                    | 130                    | 0.04     | 12.29       |
| 4.00        | 0.69            | 0.467                  | 158.9                  | 0.03     | 10.47       |
| 5.00        | 0.78            | 0.542                  | 178.7                  | 0.03     | 8.96        |
| 6.00        | 0.86            | 0.617                  | -167.8                 | 0.02     | 8.05        |
| 7.00        | 0.95            | 0.68                   | -158.1                 | 0.04     | 7.19        |
| 8.00        | 1.03            | 0.724                  | -149.3                 | 0.06     | 6.41        |
| 9.00        | 1.12            | 0.738                  | -138.9                 | 0.1      | 6.15        |
| 10.00       | 1.2             | 0.712                  | -124.2                 | 0.18     | 5.07        |

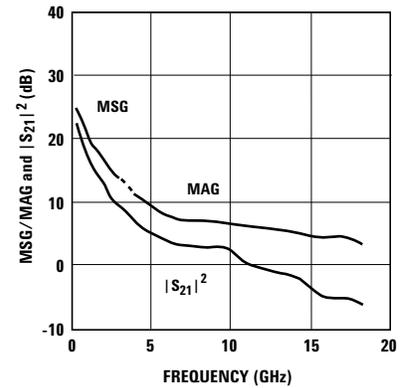

**Figure 21. MSG/MAG and  $|S_{21}|^2$  vs. Frequency at 4V, 40 mA.**

**Notes:**


1. The  $F_{min}$  values are based on a set of 16 noise figure measurements made at 16 different impedances using an ATN NP5 test system. From these measurements  $F_{min}$  is calculated. Refer to the noise parameter measurement section for more information.
2. S and noise parameters are measured on a microstrip line made on 0.010 inch thick alumina carrier assembly. The input reference plane is at the end of the gate pad. The output reference plane is at the end of the drain pad.

**ATF-331M4 Typical Scattering Parameters,  $V_{DS} = 4V, I_{DS} = 60\text{ mA}$**

| Freq.<br>GHz | $S_{11}$ |         |       | $S_{21}$ |        |        | $S_{12}$ |        |      | $S_{22}$ |       | MSG/MAG<br>dB |
|--------------|----------|---------|-------|----------|--------|--------|----------|--------|------|----------|-------|---------------|
|              | Mag.     | Ang.    | dB    | Mag.     | Ang.   | dB     | Mag.     | Ang.   | Mag. | Ang.     |       |               |
| 0.5          | 0.81     | -93.00  | 23.11 | 14.30    | 127.30 | -28.64 | 0.037    | 53.90  | 0.37 | -161.30  | 25.87 |               |
| 0.8          | 0.78     | -120.00 | 19.90 | 9.89     | 112.40 | -26.56 | 0.047    | 48.30  | 0.43 | -169.07  | 23.23 |               |
| 1.0          | 0.77     | -133.00 | 19.03 | 8.94     | 105.60 | -25.68 | 0.052    | 46.80  | 0.45 | -173.33  | 22.35 |               |
| 1.5          | 0.75     | -152.00 | 15.74 | 6.12     | 93.43  | -23.88 | 0.064    | 45.83  | 0.48 | 178.37   | 19.81 |               |
| 1.8          | 0.74     | -160.00 | 14.50 | 5.31     | 87.90  | -22.85 | 0.072    | 45.73  | 0.48 | 174.33   | 18.68 |               |
| 2.0          | 0.74     | -164.00 | 14.24 | 5.15     | 84.80  | -22.27 | 0.077    | 45.83  | 0.49 | 171.87   | 18.25 |               |
| 2.5          | 0.72     | -171.00 | 11.29 | 3.67     | 77.77  | -20.82 | 0.091    | 45.73  | 0.49 | 165.90   | 16.06 |               |
| 3.0          | 0.69     | -175.00 | 10.21 | 3.24     | 71.63  | -19.25 | 0.109    | 45.27  | 0.51 | 162.80   | 14.73 |               |
| 4.0          | 0.71     | 163.00  | 7.64  | 2.41     | 52.93  | -17.65 | 0.131    | 35.20  | 0.51 | 138.63   | 11.41 |               |
| 5.0          | 0.73     | 150.00  | 5.93  | 1.98     | 41.40  | -17.08 | 0.140    | 30.07  | 0.51 | 135.70   | 9.89  |               |
| 6.0          | 0.71     | 141.00  | 4.81  | 1.74     | 28.60  | -16.48 | 0.150    | 22.23  | 0.52 | 118.43   | 8.31  |               |
| 7.0          | 0.73     | 124.00  | 3.75  | 1.54     | 14.30  | -15.65 | 0.165    | 11.90  | 0.53 | 111.93   | 7.56  |               |
| 8.0          | 0.74     | 113.00  | 3.52  | 1.50     | 6.20   | -15.24 | 0.173    | 7.07   | 0.53 | 111.10   | 7.52  |               |
| 9.0          | 0.76     | 97.90   | 3.29  | 1.46     | -5.37  | -15.14 | 0.175    | -1.87  | 0.54 | 95.43    | 7.31  |               |
| 10.0         | 0.79     | 83.70   | 2.67  | 1.36     | -18.90 | -14.89 | 0.180    | -13.17 | 0.54 | 80.60    | 7.10  |               |
| 11.0         | 0.86     | 62.10   | 0.83  | 1.10     | -33.30 | -14.89 | 0.180    | -25.67 | 0.54 | 67.90    | 6.92  |               |
| 12.0         | 0.87     | 62.30   | 0.00  | 1.00     | -38.80 | -14.42 | 0.190    | -29.70 | 0.60 | 61.93    | 6.50  |               |
| 13.0         | 0.88     | 52.20   | -0.82 | 0.91     | -50.80 | -14.89 | 0.180    | -40.67 | 0.65 | 51.07    | 5.93  |               |
| 14.0         | 0.89     | 44.70   | -1.41 | 0.85     | -60.10 | -15.39 | 0.170    | -48.97 | 0.69 | 41.93    | 5.76  |               |
| 15.0         | 0.92     | 39.00   | -3.22 | 0.69     | -69.20 | -15.65 | 0.165    | -57.33 | 0.72 | 32.27    | 5.53  |               |
| 16.0         | 0.94     | 33.30   | -4.88 | 0.57     | -76.60 | -18.42 | 0.120    | -64.27 | 0.75 | 26.33    | 5.19  |               |
| 17.0         | 0.94     | 28.20   | -5.04 | 0.56     | -82.80 | -17.59 | 0.132    | -70.77 | 0.77 | 19.97    | 5.22  |               |
| 18.0         | 0.93     | 24.70   | -6.02 | 0.50     | -86.90 | -17.72 | 0.130    | -75.60 | 0.79 | 15.07    | 3.90  |               |

**Typical Noise Parameters,  $V_{DS} = 4V, I_{DS} = 60\text{ mA}$**

| Freq<br>GHz | $F_{min}$<br>dB | $\Gamma_{opt}$<br>Mag. | $\Gamma_{opt}$<br>Ang. | $R_n/50$ | $G_a$<br>dB |
|-------------|-----------------|------------------------|------------------------|----------|-------------|
| 0.50        | 0.38            | 0.316                  | 0.7                    | 0.06     | 22.33       |
| 0.90        | 0.42            | 0.314                  | 28.9                   | 0.06     | 19.23       |
| 1.00        | 0.43            | 0.314                  | 35.5                   | 0.06     | 19.1        |
| 1.50        | 0.47            | 0.321                  | 65.7                   | 0.05     | 16.63       |
| 1.80        | 0.5             | 0.329                  | 81.9                   | 0.05     | 15.86       |
| 2.00        | 0.52            | 0.336                  | 91.9                   | 0.05     | 14.96       |
| 2.50        | 0.56            | 0.358                  | 114.3                  | 0.04     | 13.73       |
| 3.00        | 0.61            | 0.386                  | 133.2                  | 0.04     | 12.58       |
| 4.00        | 0.7             | 0.454                  | 162.3                  | 0.03     | 10.78       |
| 5.00        | 0.79            | 0.53                   | -178.1                 | 0.03     | 9.3         |
| 6.00        | 0.88            | 0.606                  | -165.1                 | 0.02     | 8.32        |
| 7.00        | 0.97            | 0.67                   | -155.8                 | 0.04     | 7.44        |
| 8.00        | 1.06            | 0.714                  | -147.4                 | 0.07     | 6.59        |
| 9.00        | 1.16            | 0.728                  | -137.1                 | 0.11     | 6.36        |
| 10.00       | 1.25            | 0.703                  | -121.9                 | 0.19     | 5.27        |

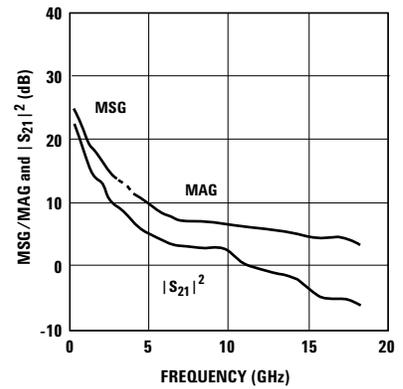

**Figure 22. MSG/MAG and  $|S_{21}|^2$  vs. Frequency at 4V, 60 mA.**

**Notes:**

1. The  $F_{min}$  values are based on a set of 16 noise figure measurements made at 16 different impedances using an ATN NP5 test system. From these measurements  $F_{min}$  is calculated. Refer to the noise parameter measurement section for more information.
2. S and noise parameters are measured on a microstrip line made on 0.010 inch thick alumina carrier assembly. The input reference plane is at the end of the gate pad. The output reference plane is at the end of the drain pad.

### S and Noise Parameter Measurements

The position of the reference planes used for the measurement of both S and Noise Parameter measurements is shown in Figure 23. The reference plane can be described as being at the center of both the gate and drain pads.

S and noise parameters are measured with a 50 ohm microstrip test fixture made with a 0.010" thickness aluminum substrate. Both source pads are connected directly to ground via a 0.010" thickness metal rib which provides a very low inductance path to ground for both source pads. The inductance associated with the addition of printed circuit board plated through holes and source bypass capacitors must be added to the computer circuit simulation to properly model the effect of grounding the source leads in a typical amplifier design.

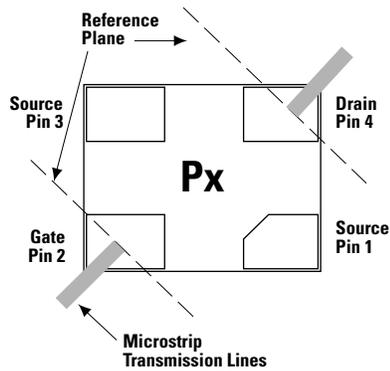


Figure 23. Position of the Reference Planes.

### Noise Parameter Applications Information

The Fmin values are based on a set of 16 noise figure measurements made at 16 different impedances using an ATN NP5 test system. From these measurements, a true Fmin is calculated. Fmin represents the true minimum noise figure of the device when the device is presented with an impedance matching network that transforms the source impedance, typically 50Ω, to an impedance represented by the reflection coefficient  $\Gamma_o$ . The designer must design a matching


network that will present  $\Gamma_o$  to the device with minimal associated circuit losses. The noise figure of the completed amplifier is equal to the noise figure of the device plus the losses of the matching network preceding the device. The noise figure of the device is equal to Fmin only when the device is presented with  $\Gamma_o$ . If the reflection coefficient of the matching network is other than  $\Gamma_o$ , then the noise figure of the device will be greater than Fmin based on the following equation.

$$NF = F_{\min} + \frac{4 R_n}{Z_o} \frac{|\Gamma_s - \Gamma_o|^2}{(1 + |\Gamma_o|^2)(1 - |\Gamma_s|^2)}$$

Where  $R_n/Z_o$  is the normalized noise resistance,  $\Gamma_o$  is the optimum reflection coefficient required to produce Fmin and  $\Gamma_s$  is the reflection coefficient of the source impedance actually presented to the device.

The losses of the matching networks are non-zero and they will also add to the noise figure of the device creating a higher amplifier noise figure. The losses of the matching networks are related to the Q of the components and associated printed circuit board loss.  $\Gamma_o$  is typically fairly low at higher frequencies and increases as frequency is lowered. Larger gate width devices will typically have a lower  $\Gamma_o$  as compared to narrower gate width devices. Typically for FETs, the higher  $\Gamma_o$  usually infers that an impedance much higher than 50Ω is required for the device to produce Fmin. At VHF frequencies and even lower L Band frequencies, the required impedance can be in the vicinity of several thousand ohms. Matching to such a high impedance requires very hi-Q components in order to minimize circuit losses. As an example at 900 MHz, when air wound coils ( $Q > 100$ ) are used for matching networks, the loss can still be up to 0.25 dB which will add directly to the noise figure of the device. Using multilayer molded inductors with Qs in the 30 to 50 range results in additional loss over the air wound coil. Losses as high as 0.5 dB or greater add to the typical 0.15 dB Fmin of the device creating an amplifier noise figure of nearly 0.65 dB.

## ATF-331M4 Die Model




Advanced\_Curtice2\_Model

```

MESFETM1
NFET=yes           Cgs=1.764 pF      Rc=62.5          Taumdl=no
PFET=no            Gdcap=3           Gsfwd=1         Fnc=1 E6
Vto=0.95           Gcd=0.338 pF      Gsrev=0         R=0.17
Beta=0.48          Rgd=              Gdfwd=1         C=0.2
Lambda=0.09        Tqm=              Gdrev=0         P=0.65
Alpha=4            Vmax=              Vjr=1           wVgfwd=
B=0.8              Fc=                Is=1 nA         wBvgs=
Tnom=27            Rd=0.125           Ir=1 nA         wBvgd=
Idstc=             Rg=1               lmax=0.1        wBvds=
Vbi=0.7            Rs=0.0625          Xti=             wldsmx=
Tau=               Ld=0.0034 nH       N=              wPmax=
Betatce=           Lg=0.0039 nH       Eg=             AllParams=
Delta1=0.2         Ls=0.0012 nH       Vbr=
Delta2=            Cds=0.0776 pF      Vtotc=
Gscap=3            Crf=0.1            Rin=
    
```

This model can be used as a design tool. It has been tested on ADS for various specifications. However, for more precise and accurate design, please refer to the measured data in this data sheet. For future improvements, Avago reserves the right to change these models without prior notice.


## ATF-331M4 Minipak Model

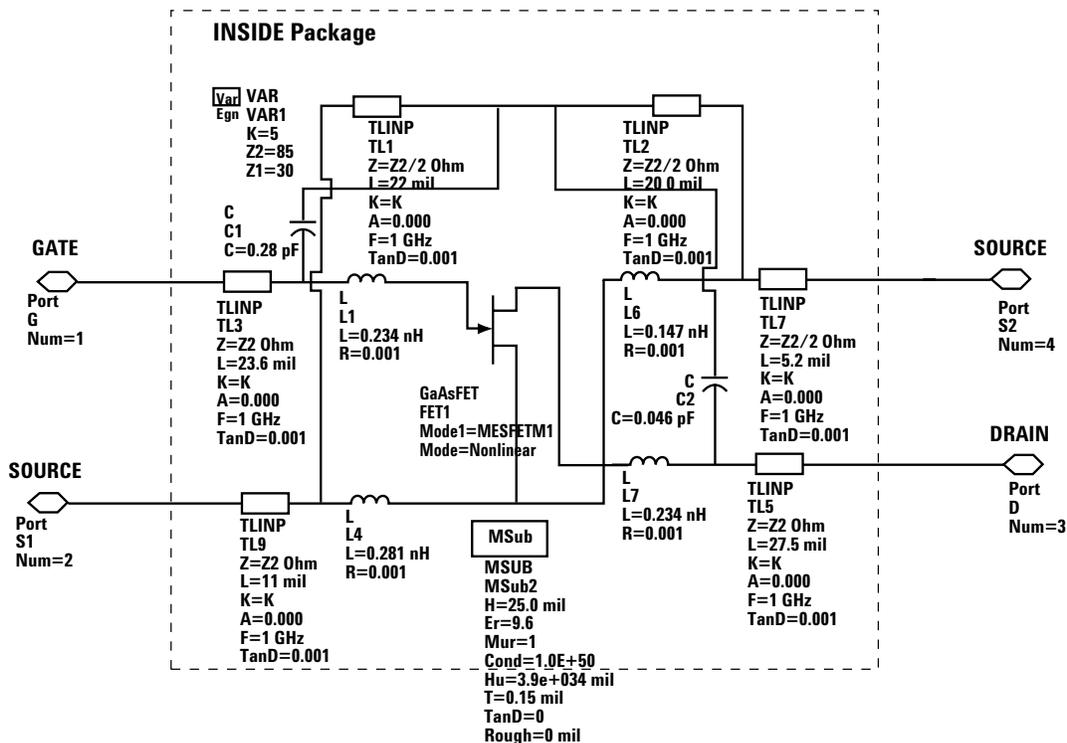


### Ordering Information

| Part Number   | No. of Devices | Container      |
|---------------|----------------|----------------|
| ATF-331M4-TR1 | 3000           | 7" Reel        |
| ATF-331M4-TR2 | 10000          | 13" Reel       |
| ATF-331M4-BLK | 100            | antistatic bag |

### MiniPak Package Outline Drawing


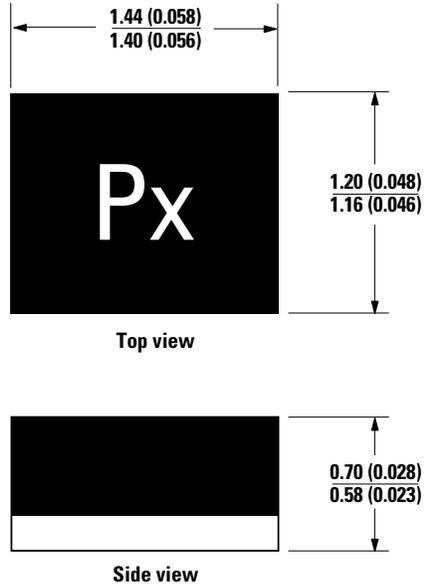


### Solder Pad Dimensions

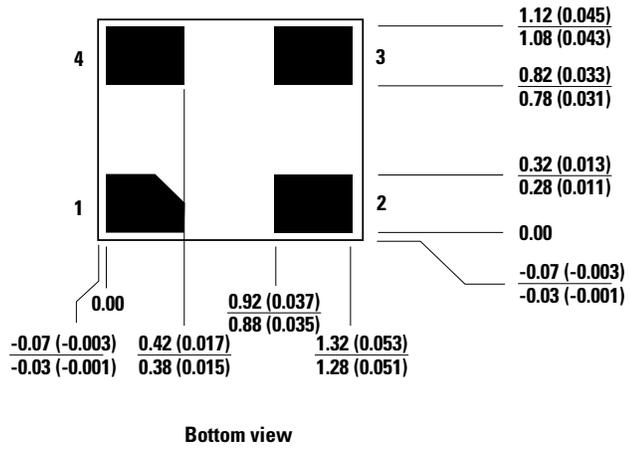


Dimensions are in millimetres (inches)

### Device Orientation for Outline 4T, MiniPak 1412

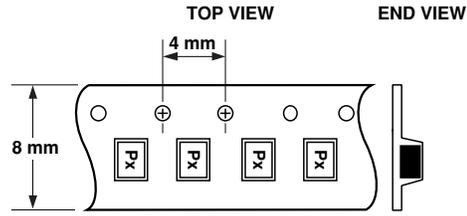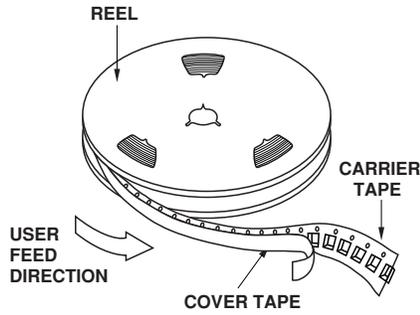

Note: Px represents Package Marking Code.  
Device orientation is indicated by package marking.

### Tape Dimensions

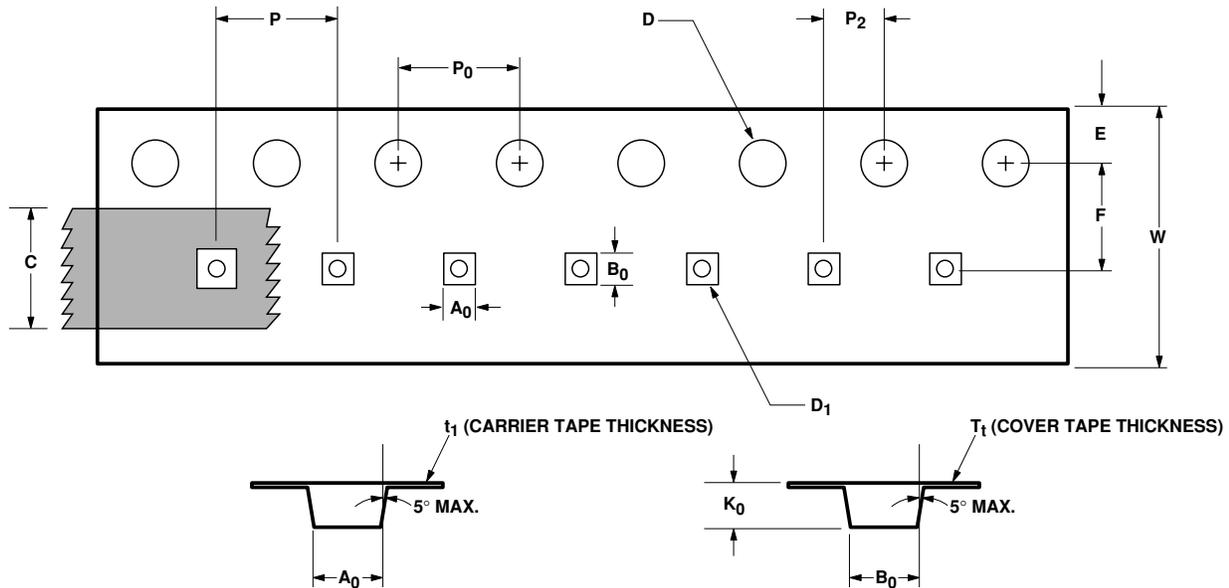

|              | DESCRIPTION                              | SYMBOL         | SIZE (mm)          | SIZE (INCHES)         |
|--------------|--|----------------|--------------------|-----------------------|
| CAVITY       | LENGTH                                   | A <sub>0</sub> | 1.40 ± 0.05        | 0.055 ± 0.002         |
|              | WIDTH                                    | B <sub>0</sub> | 1.63 ± 0.05        | 0.064 ± 0.002         |
|              | DEPTH                                    | K <sub>0</sub> | 0.80 ± 0.05        | 0.031 ± 0.002         |
|              | PITCH                                    | P              | 4.00 ± 0.10        | 0.157 ± 0.004         |
|              | BOTTOM HOLE DIAMETER                     | D <sub>1</sub> | 0.80 ± 0.05        | 0.031 ± 0.002         |
| PERFORATION  | DIAMETER                                 | D              | 1.50 ± 0.10        | 0.060 ± 0.004         |
|              | PITCH                                    | P <sub>0</sub> | 4.00 ± 0.10        | 0.157 ± 0.004         |
|              | POSITION                                 | E              | 1.75 ± 0.10        | 0.069 ± 0.004         |
| CARRIER TAPE | WIDTH                                    | W              | 8.00 + 0.30 - 0.10 | 0.315 + 0.012 - 0.004 |
|              | THICKNESS                                | t <sub>1</sub> | 0.254 ± 0.02       | 0.010 ± 0.0008        |
| COVER TAPE   | WIDTH                                    | C              | 5.40 ± 0.10        | 0.213 ± 0.004         |
|              | TAPE THICKNESS                           | T <sub>t</sub> | 0.062 ± 0.001      | 0.0024 ± 0.00004      |
| DISTANCE     | CAVITY TO PERFORATION (WIDTH DIRECTION)  | F              | 3.50 ± 0.05        | 0.138 ± 0.002         |
|              | CAVITY TO PERFORATION (LENGTH DIRECTION) | P <sub>2</sub> | 2.00 ± 0.05        | 0.079 ± 0.002         |

For product information and a complete list of distributors, please go to our web site:  
[www.avagotech.com](http://www.avagotech.com)

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies, Pte. in the United States and other countries.  
Data subject to change. Copyright © 2006 Avago Technologies Pte. All rights reserved.  
Obsoletes 5988-4993EN  
5989-4216EN May 9, 2006



## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9