



## Main

Range of product	Interface for discrete signals
Product or component type	Slim solid state output interface module
Contacts type and composition	1 NC
[Uc] control circuit voltage	24 V
Control circuit type	DC
Line Rated Current	$\leq 13.6$ mA
Reverse polarity protection	Internal control circuit Internal output circuit
Short-circuit protection	3.15 A external fuse fast blow ( $I_k \leq 1$ kA AC and $I_k \leq 100$ A DC)
[Ith] conventional free air thermal current	3 Aat 104 °F (40 °C)
Local signalling	Green mechanical indicator for position of contacts and 1 green LED control signal state
Sale per indivisible quantity	1
Width pitch dimension	0.69 in (17.5 mm)

## Complementary

Control circuit voltage limits	28.8 V
Voltage state 1 guaranteed	16.9 V
Current state 1 guaranteed	8.3 mA
Voltage state 0 guaranteed	5.3 V
Current state 0 guaranteed	2 mA
[Ue] rated operational voltage	24...240 V
Output circuit type	AC
Rated operational voltage limits	$\leq 264$ V
[Ie] rated operational current	1 A AC-15 vertical position, single product conforming to IEC 60947-5-1 1 A AC-15 vertical position, touching product conforming to IEC 60947-5-1 1.6 A AC-13 vertical position, single product conforming to IEC 60947-5-1 1.6 A AC-14 vertical position, single product conforming to IEC 60947-5-1 2.1 A AC-12 vertical position, single product conforming to IEC 60947-5-1 1.5 A AC-12 vertical position, touching product conforming to IEC 60947-5-1 1.5 A AC-13 vertical position, touching product conforming to IEC 60947-5-1 1.5 A AC-14 vertical position, touching product conforming to IEC 60947-5-1
Minimum switching current	10 mA
Residual current	$\leq 2.5$ mA
Drop-out voltage	$\leq 3$ V $I_e \geq 10$ mA $\leq 1.5$ V $I_e \geq 100$ mA
DV/dt	500 V/ $\mu$ s
0 crossing voltage	50 V peak
Response time	$\leq 10$ ms from state 0 to state 1at 50 Hz $\leq 10$ ms from state 1 to state 0at 50 Hz $\leq 8$ ms from state 0 to state 1at 60 Hz $\leq 8$ ms from state 1 to state 0at 60 Hz
Switching frequency	$\leq 0.7$ Hz AC-13 module alone duty cycle: 40 % $\leq 0.7$ Hz AC-14 module alone duty cycle: 40 % $\leq 0.7$ Hz AC-15 module alone duty cycle: 40 % $\leq 50$ Hz on resistive load duty cycle: 50 %
[Ui] rated insulation voltage	250 V conforming to VDE 0110 group C 300 V conforming to IEC 60947-1
Flame retardance	V0 conforming to UL 94
Cable cross section	0...0.01 in <sup>2</sup> (0.27...4 mm <sup>2</sup> ), 1 wire rigid 0...0 in <sup>2</sup> (0.34...2.5 mm <sup>2</sup> ), 1 or 2 wires flexible with cable end 0...0 in <sup>2</sup> (0.6...2.5 mm <sup>2</sup> ), 1 or 2 wires flexible without cable end screw clamp terminal

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Operating position	Any position
Installation category	II conforming to IEC 60947-1
Mounting support	Asymmetrical DIN rail Combination rail Symmetrical DIN rail
Product weight	0.97 lb(US) (0.44 kg)

## Environment

dielectric strength	2500 V between wired interface and earth for 1 minute 4000 V between I/O for 1 minute
standards	IEC 60947-5-1
product certifications	BV CSA DNV LROS (Lloyds register of shipping) UL
IP degree of protection	IP20 conforming to IEC 60529
protective treatment	TC
fire resistance	1760 °F (960 °C) conforming to IEC 60695-2-1
shock resistance	30 gn 11 ms conforming to IEC 60068-2-27
vibration resistance	5 gn (f = 10...150 Hz) conforming to IEC 60068-2-6
electromagnetic compatibility	1.2/50 µs shock waves immunity test, 0.5 kV for U < 50 V conforming to IEC 60947-1 1.2/50 µs shock waves immunity test, 1.5 kV for U < 150 V conforming to IEC 60947-1 1.2/50 µs shock waves immunity test, 2.5 kV for U < 300 V conforming to IEC 60947-1 Electromagnetic field immunity test level 3, 10 V/m between 27...1000 MHz conforming to IEC 61000-4-3 Electrostatic discharge immunity test level 3, 8 kV conforming to IEC 61000-4-2 Fast transients immunity test level 3, on input/output 1 kV conforming to IEC 61000-4-4 Fast transients immunity test level 3, on power supply 2 kV conforming to IEC 61000-4-4
ambient air temperature for operation	-13...158 °F (-25...70 °C) at Us 23...131 °F (-5...55 °C) unrestricted operation
ambient air temperature for storage	-40...176 °F (-40...80 °C)
operating altitude	<= 9842.52 ft (3000 m)
pollution degree	2 conforming to IEC 60947-1

## Offer Sustainability


WARNING: This product can expose you to chemicals including:	WARNING: This product can expose you to chemicals including:
Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm.	Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm.
For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>	For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>

## Contractual warranty

Warranty period	18 months
-----------------	-----------

## Slim Solid-State Interface Module


### Dimensions

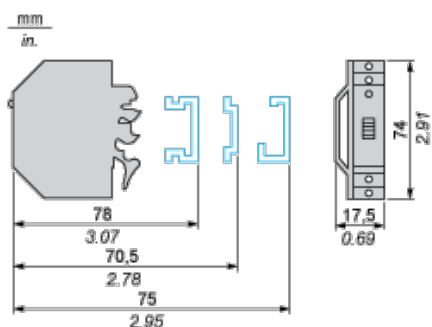

## Slim Solid-State Interface Module

### Example of Application with PLC


Interfacing PLC discrete outputs

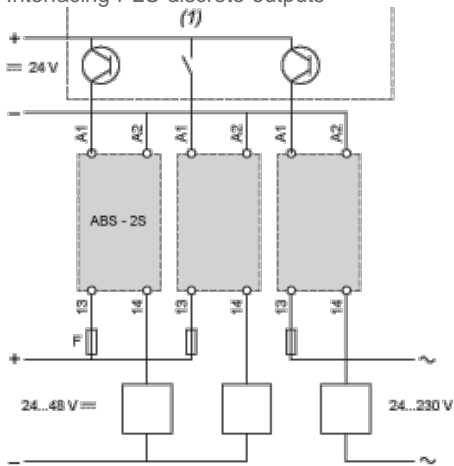


(1) PLC positive logic transistor (or relay) outputs

## Solid-State Output Module

### Circuit Diagram

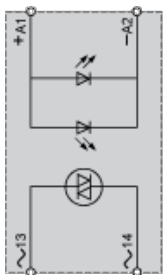

### Wiring Diagrams

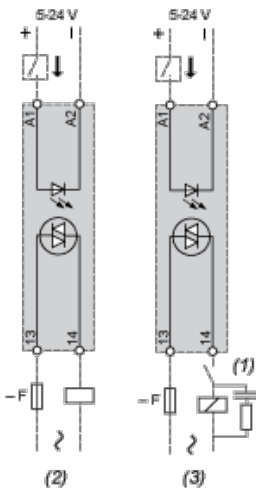


F fuse DF1 SS133.2

- (1) or peak limiter
- (2) Resistive load
- (3) Inductive load

## Temperature Derating Curves - $U_c = U_s = 24\text{ V}$

### AC Loads

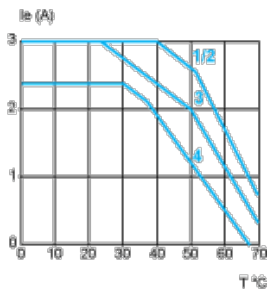

- (1) Vertical module alone or adjacent to modules with low heat dissipation
- (2) Horizontal module alone or adjacent to modules with low heat dissipation
- (3) Vertical module mounted with 2 modules with identical heat dissipation on both sides
- (4) Horizontal module mounted with 2 modules with identical heat dissipation on both sides

NOTE: T°C is the ambient temperature.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9