

Modular Plugs for Specialty Cables




Loadbar and wire aligner system provide for consistent assembly and stable electrical performance.

CAT6a Large Diameter Plugs

- Field installable plug for cable conductors up to 0.048" and overall diameters up to .295"
- Suitable for CAT6a and CAT6 applications delivering 10G Base-T and Gigabit Ethernet
- Low profile design allows for use in high density switches and routers
- Anti-snap boot prevents plug tab damage during installation
- Packaging available for both field installation and factory terminations
- Can be used to terminate both shielded and unshielded cabling

Part Number	Performance	Conductor Diameter	Cable Diameter	Packaging
SS-39200-027	CAT6a	.042"-.048" [1.07 - 1.22]	.270"-.295" [6.86 - 7.49]	Individually Bagged
SS-39200-030	CAT6a	.042"-.048" [1.07 - 1.22]	.270"-.295" [6.86 - 7.49]	Bulk

Stewart Connector's Large Diameter modular plug is designed to terminate directly to CAT6a and CAT6 large diameter solid conductor cabling. Typical modular plugs are designed for use on patch cable assemblies and therefore are designed to terminate to stranded conductors of wire sizes from AWG 24 through AWG 26. However, in many direct connect, or consolidation point applications where link lengths exceed 10 Meters, a horizontal cable type is specified. Horizontal cable is normally made with solid conductor copper wire in the diameter range of AWG 23 through AWG 24. This larger copper size translates into larger conductor diameters which make terminating to a traditional modular plug problematic. Stewart's unique loadbar and contact design accommodates this large diameter cabling in the form factor of a standard RJ45 plug. To learn more visit www.stewartconnector.com.

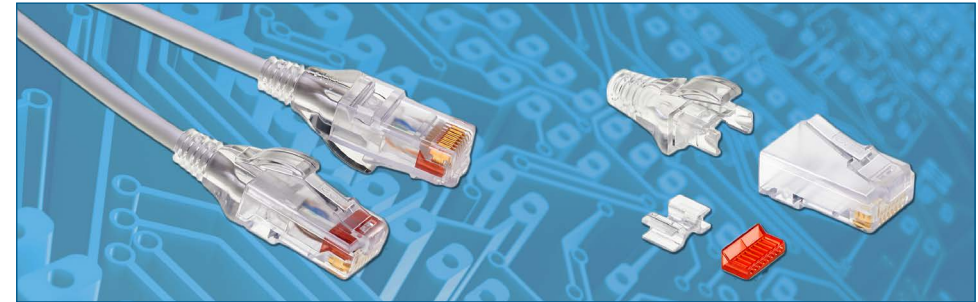

Loadbar and wire aligner system provide for consistent assembly and stable electrical performance.

CAT6 Small Diameter Plugs

- Accommodates a cable diameter up to .160"
- Accommodates AWG 28 and AWG 30 copper conductors with overall insulated conductor diameters of 0.025" – 0.030"
- Proprietary contact design reliably terminates solid or stranded conductors
- 50 µin Gold plated electro-polished contacts
- Capable of field or factory terminations with standard Stewart crimp tools

Part Number	Performance	Conductor Diameter	Cable Diameter	Packaging
SS-39100-039	CAT6	.025"-.030" [0.64 - 0.76]	.160" [4.06] Max	Bulk

Stewart Connector's CAT6 UTP modular plug allows users to build patch cables using small diameter AWG28 and AWG30 cabling. Most traditional patch cables are built using AWG 24 and AWG 26 cable, so industry standard plug designs are not suitable to terminate to smaller AWG28 and AWG30 cable. The Stewart design uses a unique, proprietary contact design and wire alignment system to insure proper cable to plug terminations providing reliable long term connections. The wire manager included in the plug kit allows for precise conductor placement which results in repeatable consistent assemblies and patch cord performance. Included in the plug kit is a new low profile boot design which accommodates smaller diameter cable and strain relief protection from exceeding cable manufacturer's minimum bend radius requirements. To learn more visit www.stewartconnector.com.

Stewart Connector Modular Plug

Quick Reference Guide

						Low Volume Terminations	High Volume Factory Terminations		
Part Number	Performance	Shield	Strain Relief Boot	Cable Diameter	Conductor Diameter	Installation Hand Tool Kit	Production Hand Tool	Production Die Set	Termination Instructions
SS-39100-028	CAT6a	No	Slimline Included	.300" [7.62] Max	.033"-.038" [0.84 - 0.97]	2990003-01	2940231-01	2905014-01	MN390014.PDF
SS-39100-029	CAT6a	No	Not Included	.235" [5.97] Max	.037"-.042" [0.94 - 1.07]	2990003-01	2940231-01	2905014-01	MN390014.PDF
SS-39100-030	CAT6a	No	Not Included	.235" [5.97] Max	.033"-.038" [0.84 - 0.97]	2990003-01	2940231-01	2905014-01	MN390014.PDF
SS-39100-031	CAT6a	No	Slimline Included	.300" [7.62] Max	.037"-.042" [0.94 - 1.07]	2990003-01	2940231-01	2905014-01	MN390014.PDF
SS-39200-020	CAT6a	Yes	Slimline Included	.220"-.240" [5.59 - 6.10]	.037"-.042" [0.94 - 1.07]	N/A	2980070-01*		MN390011.PDF
SS-39200-021	CAT6a	Yes	Not Included	.220"-.240" [5.59 - 6.10]	.037"-.042" [0.94 - 1.07]	N/A	2980070-01*		MN390011.PDF
SS-39200-022	CAT6a	Yes	Slimline Included	.230"-.250" [5.84 - 6.35]	.037"-.042" [0.94 - 1.07]	N/A	2980075-01*		MN390011.PDF
SS-39200-023	CAT6a	Yes	Not Included	.230"-.250" [5.84 - 6.35]	.037"-.042" [0.94 - 1.07]	N/A	2980075-01*		MN390011.PDF
SS-39200-024	CAT6a	Yes	Slimline Included	.230"-.250" [5.84 - 6.35]	.033"-.038" [0.84 - 0.97]	N/A	2980075-01*		MN390011.PDF
SS-39200-027	CAT6a	Yes	Slimline Included	.270"-.295" [6.86 - 7.49]	.042"-.048" [1.07 - 1.22]	N/A	2980078-01*		MN390015.PDF
SS-39100-008	CAT6	No	Slimline Included	.220"-.230" [5.59 - 5.84]	.037"-.042" [0.94 - 1.07]	2990009-01	2940231-01	2905029-01	MN390006.PDF
SS-39100-011	CAT6	No	Slimline Included	.240"-.250" [6.10 - 6.35]	.037"-.042" [0.94 - 1.07]	2990009-01	2940231-01	2905029-01	MN390006.PDF
SS-39100-021	CAT6	No	Not included - See boot PN: 450-034	.235" [5.97] Max	.037"-.042" [0.94 - 1.07]	2990003-01	2940231-01	2905014-01	MN390010.PDF
SS-39100-039	CAT6	No	Slimline Included	.160" [4.06] Max	.025"-.030" [0.64 - 0.76]	2990003-01	2940231-01	2905014-01	MN390017.PDF
SS-39200-010	CAT6	Yes	Not Included	.240"-.260" [6.10 - 6.60]	.037"-.042" [0.94 - 1.07]	N/A	2980075-01*		MN390009.PDF
SS-39200-011	CAT6	Yes	Included	.232"-.248" [5.90 - 6.30]	.037"-.042" [0.94 - 1.07]	N/A	2980075-01*		MN390009.PDF
SS-39200-012	CAT6	Yes	Not Included	.220"-.240" [5.59 - 6.10]	.037"-.042" [0.94 - 1.07]	N/A	2980070-01*		MN390009.PDF
SS-39200-015	CAT6	Yes	Included	.220"-.240" [5.59 - 6.10]	.037"-.042" [0.94 - 1.07]	N/A	2980070-01*		MN390009.PDF
SS-39200-019	CAT6	Yes	Not included - See boot PN: 39200-883	.270"-.295" [6.86 - 7.49]	.037"-.042" [0.94 - 1.07]	N/A	2980078-01*		MN390009.PDF
SS-37000-007	CAT5E	No	Not included - See boot PN: 450-034	.235" [5.97] Max	.037"-.042" [0.94 - 1.07]	2990003-01	2940231-01	2905014-01	MN370053.PDF
SS-37000-009	CAT5E	No	Not included - See boot PN: 450-034	.235" [5.97] Max	.042"-.048" [1.07 - 1.22]	2990003-01	2940231-01	2905014-01	MN370053.PDF
SS-37200-028	CAT5E	Yes	Not included - See boot PN: 450-011	.235" [5.97] Max	.037"-.042" [0.94 - 1.07]	2990003-01	2940231-01	2905014-01	MN370058.PDF
940-SP-3088R-A133	Cat5 / T1	No	Not included - See boot PN: 450-011	.235" [5.97] Max	.035"-.040" [0.89 - 1.02]	2990003-01	2940231-01	2905005-01	MN300015.PDF

Click for web page

Click for PDF



Termination Instructions available at stewartconnector.com

* Tool kits including Hand Tool and Die Set

Stewart has the widest selection of high performance modular plugs available on the market today, visit stewartconnector.com for our full product line offering.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9