

J

I

H

G

F




E

D

C

B

A

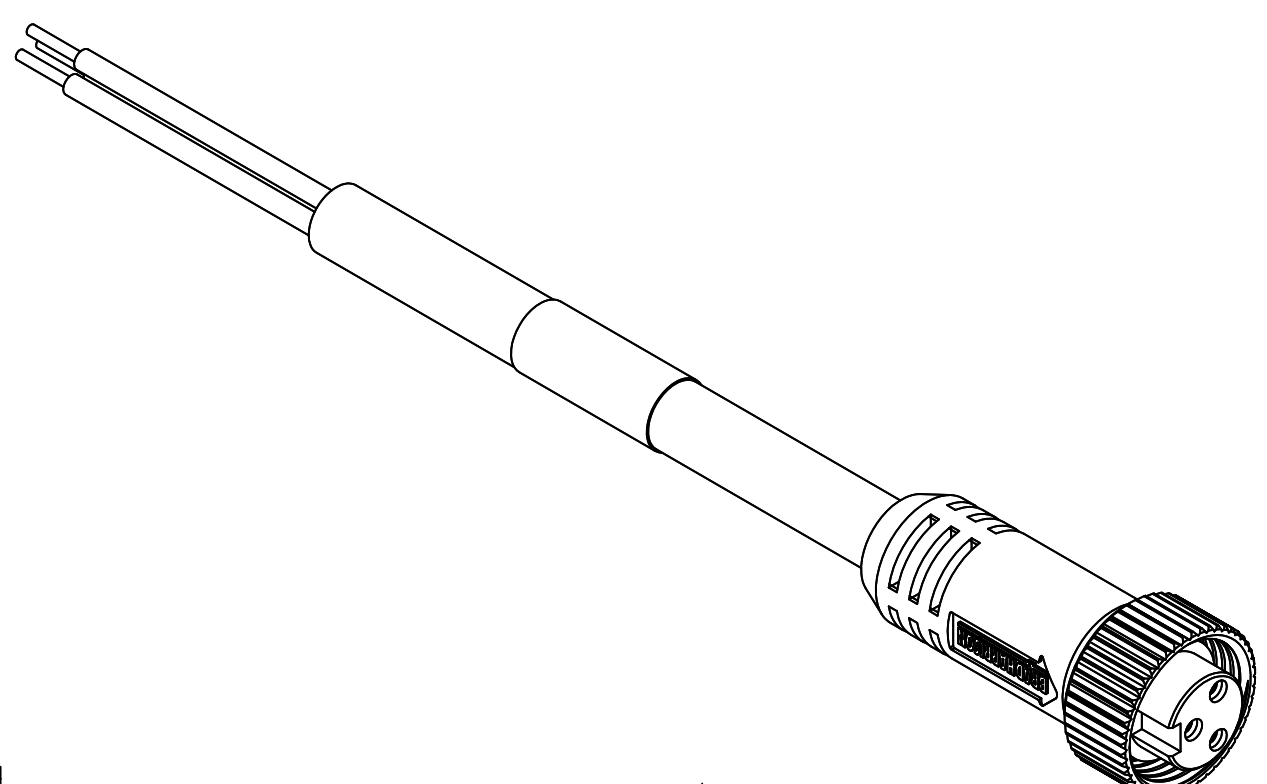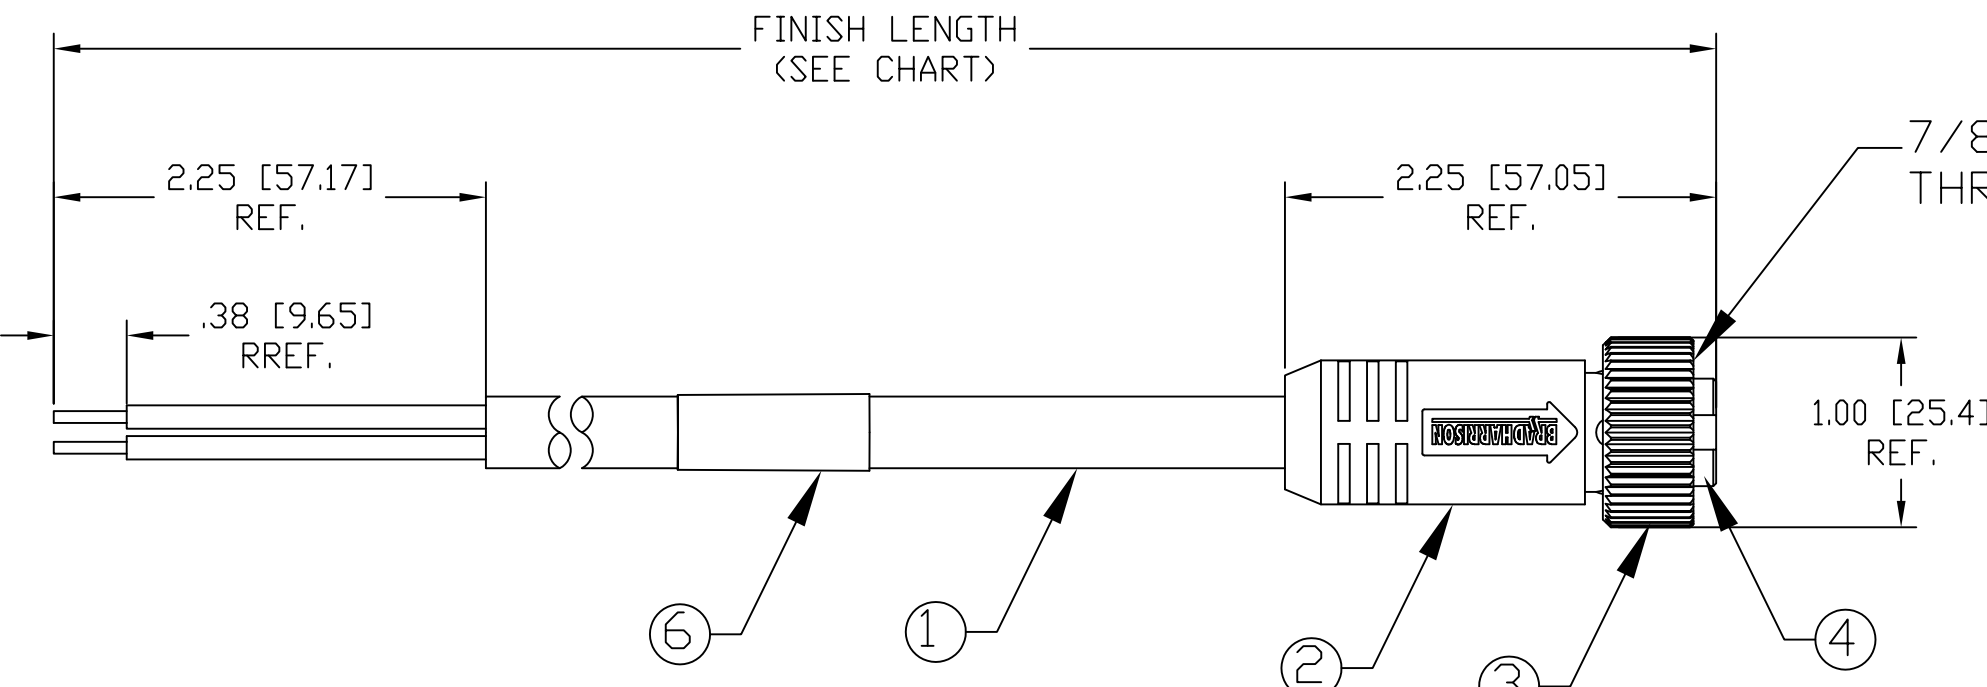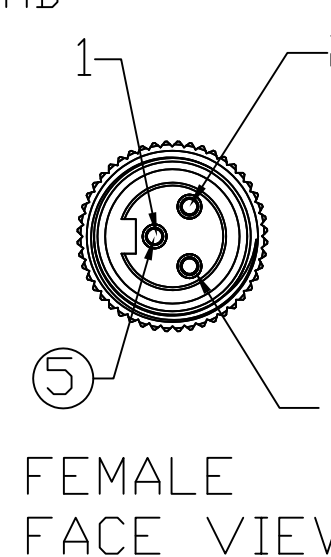13	12	11	10	9	8	7	6	5	4	3	2	1							
PART NUMBER	ENGINEERING NUMBER	FINISH LENGTH			PART NUMBER	ENGINEERING NUMBER	FINISH LENGTH												
1300060217	103000A01F030	3.00' +1.75" -0 [.9M +44.5 -0]			1300060257	103000A01F450	45.00' +12.50" -0 [13.7M +317.5 -0]												
1300060221	103000A01F060	6.00' +3.50" -0 [1.8M +88.9 -0]			1300060258	103000A01F500	50.00' +24.50" -0 [15.2M +622.3 -0]												
1300060229	103000A01F090	9.00' +3.50" -0 [2.7M +88.9 -0]																	
1300060232	103000A01F120	12.00' +6.50" -0 [3.7M +165.1 -0]																	
1300060237	103000A01F150	15.00' +6.50" -0 [4.6M +165.1 -0]																	
1300060241	103000A01F200	20.00' +6.50" -0 [6.1M +165.1 -0]																	
1300060246	103000A01F250	25.00' +12.50" -0 [7.6M +317.5 -0]																	
1300060250	103000A01F300	30.00' +12.50" -0 [9.1M +317.5 -0]																	
1300060253	103000A01F350	35.00' +12.50" -0 [10.7M +317.5 -0]																	
1300060254	103000A01F400	40.00' +12.50" -0 [12.2M +317.5 -0]																	
NOTE 1) MATERIAL: SEE TABLE 2) FINISHES: SEE TABLE 3) WRAP LABEL IS MARKED WITH P/N, DATE CODE, VOLTAGE & AMPERAGE 4) MATES WITH: MINI CHANGE, 3 POLE RECEPTACLE 5) ELECTRICAL DATA: INLINE CORDSET FEMALE A-SIZE WITH FLYING LEADS 16AWG UNSHIELDED POLES: 3 MAX. VOLTAGE: 600V MAX. CURRENT 13A PROTECTION IP67 TEMPERATURE RANGE: -20°C TO 105°C 6) PACKAGING: CABLE ASSEMBLIES ARE BAGGED SEPERATELY IN POLY BAGS WITH BAR CODE LABEL ATTACHED TO OUTSIDE OF BAG. 7>ASSEMBLY IS RoHS COMPLIANT. 8>CERTIFICATION UL RECOGNIZED, FILE NO. E152210 CSA CERTIFIED, FILE NO. LR6837					   P1 <table><tr><td>1</td><td>GREEN/YELLOW-GRD</td></tr><tr><td>2</td><td>BLACK</td></tr><tr><td>3</td><td>WHITE</td></tr></table> WIRING DIAGRAM								1	GREEN/YELLOW-GRD	2	BLACK	3	WHITE	
1	GREEN/YELLOW-GRD																		
2	BLACK																		
3	WHITE																		

6	1	LABEL	PLASTIC FILM	BLACK/YELLOW
5	3	CONTACT SOCKET	COPPER ALLOY	GOLD PLATED
4	1	INSERT	PVC	YELLOW
3	1	COUPLING NUT	ZINC DIE CAST	BLACKE-COATED
2	1	OVERMOLD	PVC	YELLOW
1	1	CABLE, 16AWG-3 TYPE STOOD	PVC	YELLOW
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

J

I

H

G

F

E

D


C

B



A

13	12	11	10	9	8	7	6	5	4	3	2	1								
CORRECT COLOR ROTATION EC NO: WNA2010-0389 DRWN: TWOLDEGE 12/17/09 CH'KD: BWOODMAN APPR: JFMURPHY 2010/01/04 REV QUALITY SYMBOL =0 =0 GENERAL TOLERANCES (UNLESS SPECIFIED) <table><tr><th></th><th>mm</th><th>INCH</th></tr><tr><td>4 PLACES</td><td>±----</td><td>±---</td></tr><tr><td>3 PLACES</td><td>±.005</td><td>±.005</td></tr><tr><td>2 PLACES</td><td>±.013</td><td>±.010</td></tr><tr><td>1 PLACE</td><td>±.025</td><td>±.020</td></tr></table>ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS DIMENSION STYLE IN/MM DRAWN BY DATE TWOLDEGE 2009/07/10 CHECKED BY DATE BWOODMAN 2009/07/10 APPROVED BY DATE JFMURPHY 2010/01/04 MATERIAL NO. SEE CHART SIZE C THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION SCALE 1:1 DESIGN UNITS INCH THIRD ANGLE PROJECTION TITLE MINI CHANGE ASSEMBLY 3-POLE FEMALE ST 16/3AWG PVC MOLEX INCORPORATED DOCUMENT NO. SD-130006-008 SHEET NO. 1 OF 1						mm	INCH	4 PLACES	±----	±---	3 PLACES	±.005	±.005	2 PLACES	±.013	±.010	1 PLACE	±.025	±.020	
	mm	INCH																		
4 PLACES	±----	±---																		
3 PLACES	±.005	±.005																		
2 PLACES	±.013	±.010																		
1 PLACE	±.025	±.020																		

13	12	11	10	9	8	7	6	5	4	3	2	1
MATERIAL NO.	ENGINEERING NO.	FINISHED LENGTH										
1300060219	103000A01F0302	3.00 FT +1.75/-0 IN (.9M +44.5/-0mm)										
1300060223	103000A01F0602	6.00 FT +3.50/-0 IN (1.8M +88.9/-0mm)										
1300060234	103000A01F1202	12.00 FT +6.50/-0 IN (3.7M +165.1/-0mm)										
1300060239	103000A01F1502	15.00 FT +6.50/-0 IN (4.6M +165.1/-0mm)										
1300060243	103000A01F2002	20.00 FT +6.50/-0 IN (6.1M +165.1/-0mm)										
1300060248	103000A01F2502	25.00 FT +12.50/-0 IN (7.6M +317.5/-0mm)										

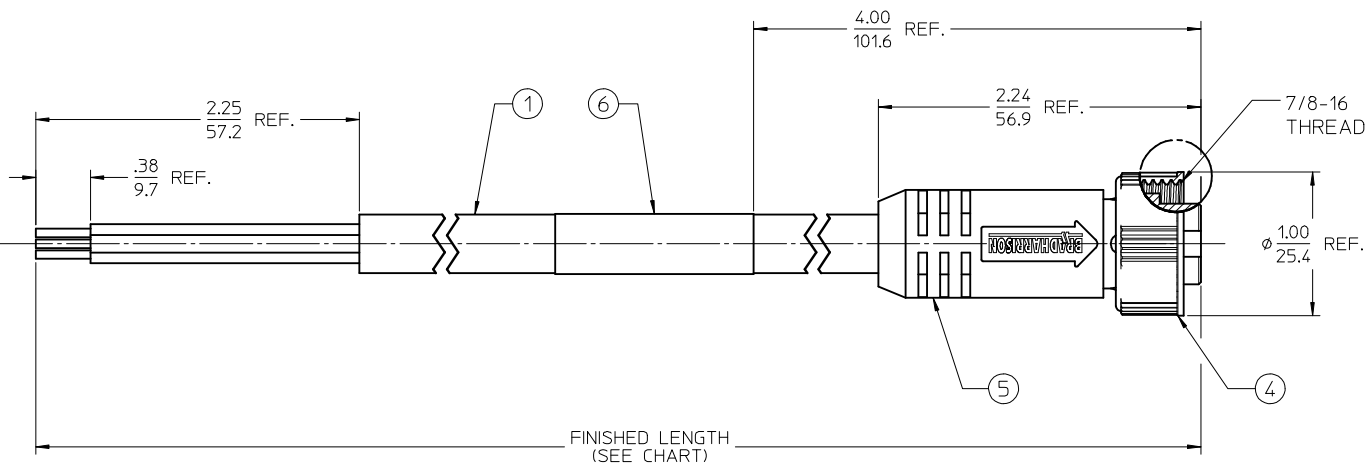

Iso2
Scale 1:1

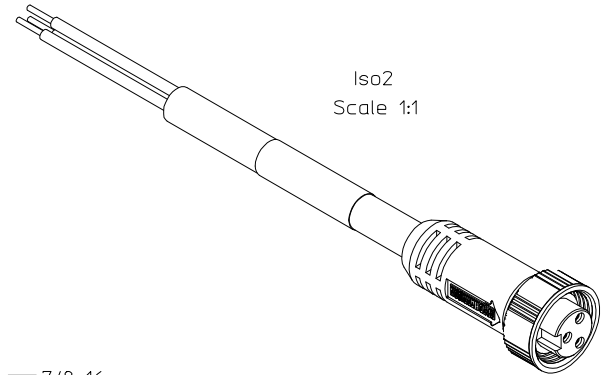

FEMALE FACE VIEW

- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISHES: SEE TABLE
 3. ELECTRICAL SPECIFICATIONS
VOLTAGE RATING: 600V AC/DC
CURRENT RATING: 13 AMPS
 4. PROTECTION: IP67
 5. ASSEMBLY IS RoHS COMPLIANT BY EXEMPTION

1	GREEN/YELLOW
2	BLACK
3	WHITE

WIRING DIAGRAM

6	1	WRAP LABEL	VINYL	BLACK/YELLOW
5	1	OVERMOLD	PVC	YELLOW
4	1	COUPLING NUT	NYLON	GRAY
3	3	CONTACT SOCKET	Cu ALLOY	GOLD PLATED
2	1	INSERT	PVC	YELLOW
1	A/R	CABLE, 16/3, ST00W	PVC JACKET	YELLOW
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

NEW SALES DOC EC NO: IPG2013-0795 DRAWNRSTONE 2012/11/28 CHKDK: JOZWIK 2013/01/16 APPR: JFMURPHY 2013/03/01	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 1.5:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION	
						DRAWN BY RSTONE		DATE 2012/11/28			TITLE MC FEMALE CABLE ASSEMBLY 3 POLE, 16 AWG, STOOW NON-METALIC COUPLING
						CHECKED BY K. JOZWIK		DATE 2013/01/16			
						APPROVED BY JFMURPHY		DATE 2013/03/01			
			ANGULAR ± 2 °			MATERIAL NO.		DOCUMENT NO.			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE CHART		SD-130006-047			1 OF 1

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9