

4


3

2

1

LOC DW	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			B4	REVISED (ECO-14-012616), OBSOLETED 3-6.	30DEC2014	LL	SH




LED SCHEMATIC	
POSITION 2	POSITION 1
GREEN	YELLOW
9+  -10	11+  -12
FOR 1734320-X	



DETAIL B(SCEALE 2:1)

LED SCHEMATIC	
POSITION 2	POSITION 1
YELLOW	GREEN
9+  -10	11+  -12
FOR 1-1734320-X	

LED SCHEMATIC	
POSITION 2	POSITION 1
GREEN	GREEN
9+  -10	11+  -12
	YELLOW
FOR 4-1734320-X	

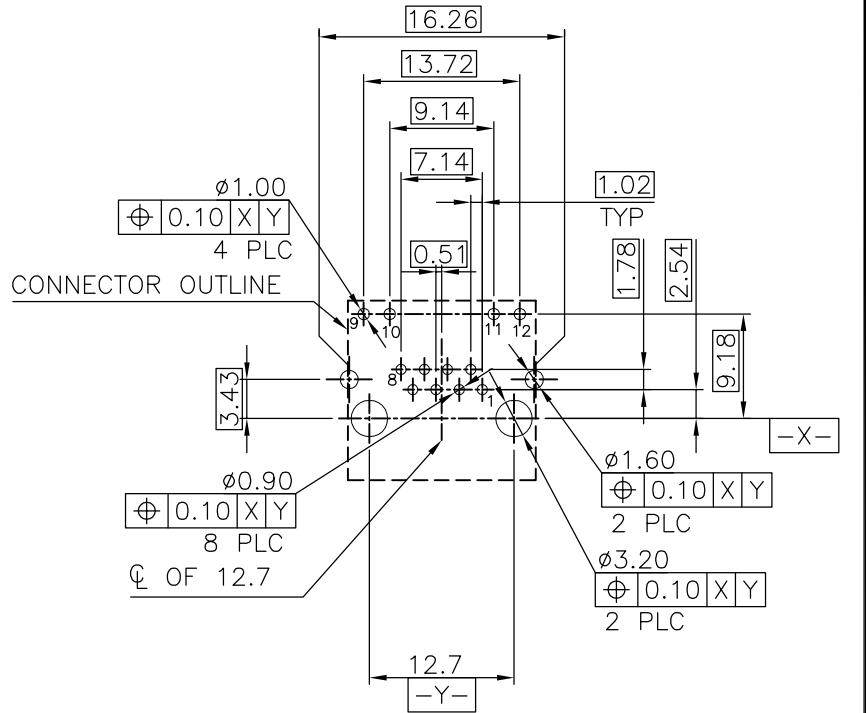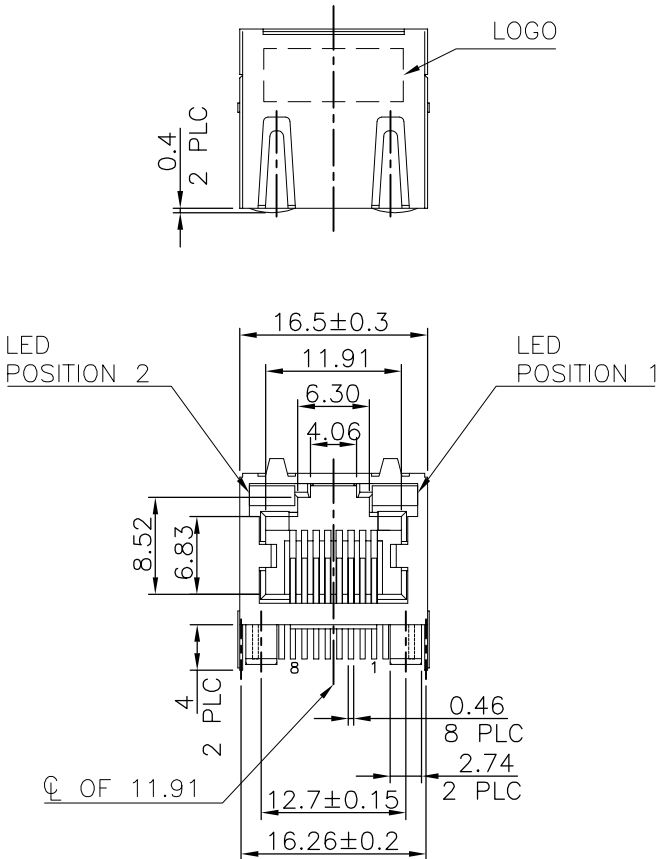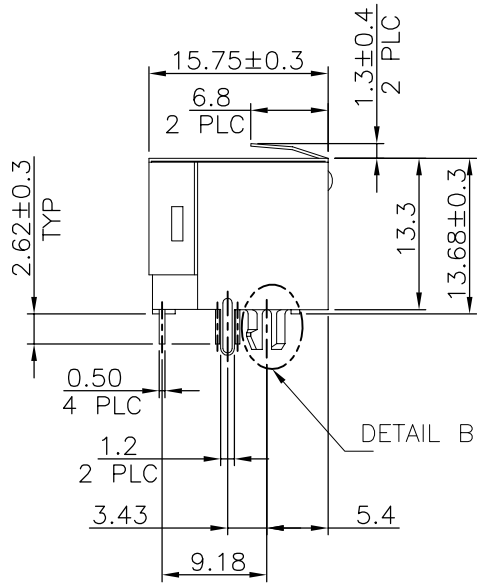


RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05 (TOP VIEW)

5 OBSOLETE	GREEN	GREEN/ YELLOW	1.27μm [50μ"]	4-1734320-4
			0.762μm [30μ"]	4-1734320-3
			0.381μm [15μ"]	4-1734320-2
OBSOLETE			0.152μm [6μ"]	4-1734320-1
5 OBSOLETE	YELLOW	GREEN	1.27μm [50μ"]	1-1734320-4
			0.762μm [30μ"]	1-1734320-3
			0.381μm [15μ"]	1-1734320-2
			0.152μm [6μ"]	1-1734320-1
OBSOLETE	GREEN	YELLOW	1.27μm [50μ"]	1734320-4
			0.762μm [30μ"]	1734320-3
OBSOLETE			0.381μm [15μ"]	1734320-2
			0.152μm [6μ"]	1734320-1
5	POSITION 2 POSITION 1		MIN. GOLD THICKNESS	PART NUMBER
	INDICATOR COLOR			


NOTE:

- MATERIAL:
HOUSING: PA46, WITH 30% GF.
UL 94V-0, BLACK COLOR.
CONTACTS: PHOSPHOR BRONZE.
SHELL: BRASS.
LED SOLDER TAIL: STEEL.
- FINISH:
CONTACTS: (SEE TABLE) GOLD PLATED ON CONTACT AREA,
GOLD PLATED ON SOLDER TAIL,
WITH ENTIRE CONTACT UNDERPLATED
1.27μm [50μ"] MIN. NICKEL.
SHELL: 0.508μm [20μ"] MIN. NICKEL PLATED.
LED SOLDER TAIL: 2.159μm [85μ"] MIN. TIN PLATED.
- RECOMMENDED PCB THICKNESS: 1.6mm.
- WAVE SOLDER CAPABLE TO 265°C PER TE SPEC 109-202, CONDITION B.
- OBsolete PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI






THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. HSING	09JUN2009	 TE Connectivity			
		CHK S. CHIEN	09JUN2009				
DIMENSIONS: mm		APVD W. KODAMA	09JUN2009	NAME MODULAR JACK CONNECTOR RJ45, SINGLE PORT, SIDE ENTRY, DIP TYPE			
		PRODUCT SPEC 108-57535					
		APPLICATION SPEC		SIZE A3			
MATERIAL SEE NOTE		WEIGHT 4.95 GRAMS					
FINISH SEE NOTE		CUSTOMER DRAWING		RESTRICTED TO —		SCALE —	
				SHEET 1 OF 6		REV B4	

LED SCHEMATIC	
POSITION 2	POSITION 1
GREEN	YELLOW
9+  -10	11+  -12
FOR 5-1734320-1~4	

LED SCHEMATIC	
POSITION 2	POSITION 1
YELLOW	GREEN
9+  -10	11+  -12
FOR 5-1734320-5~8	



DETAIL B(SCEALE 2:1)

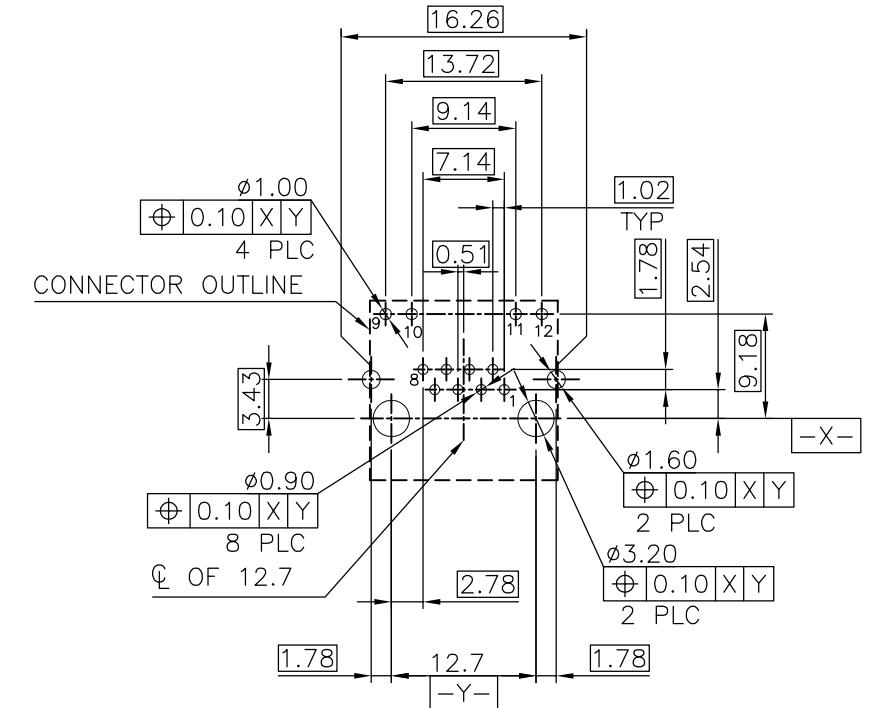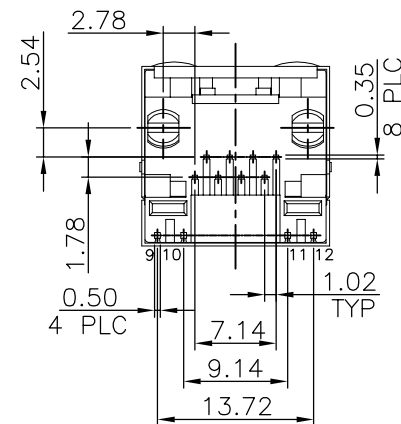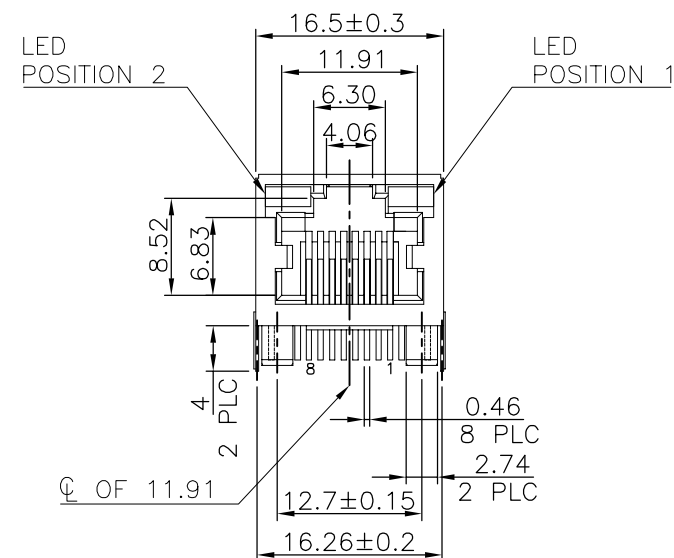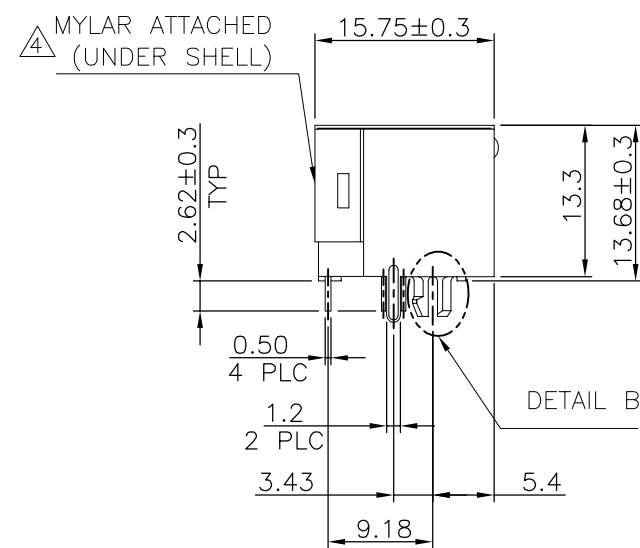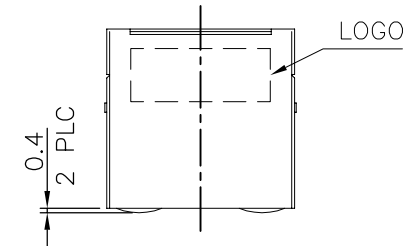


RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05 (TOP VIEW)

NOTE:

1. MATERIAL:
HOUSING: PA46, WITH 30% GF.
UL 94V-0, BLACK COLOR.
CONTACTS: PHOSPHOR BRONZE.
SHELL: BRASS.
LED SOLDER TAIL: STEEL.
MYLAR: SILICONE POLYMER.
2. FINISH:
CONTACTS: (SEE TABLE) GOLD PLATED ON CONTACT AREA,
GOLD PLATED ON SOLDER TAIL,
WITH ENTIRE CONTACT UNDERPLATED
1.27 μ m [50 μ "] MIN. NICKEL.
SHELL: 0.508 μ m [20 μ "] MIN. NICKEL PLATED.
LED SOLDER TAIL: 2.159 μ m [85 μ "] MIN. TIN PLATED.
3. RECOMMENDED PCB THICKNESS: 1.6mm.
- ④ MYLAR ATTACHED UNDER SHELL.
5. WAVE SOLDER CAPABLE TO 265°C PER TE SPEC 109-202, CONDITION B.

OBSOLETE	YELLOW	GREEN	1.27μm [50μ"]	5-1734320-8
			0.762μm [30μ"]	5-1734320-7
			0.381μm [15μ"]	5-1734320-6
			0.152μm [6μ"]	5-1734320-5
OBSOLETE	GREEN	YELLOW	1.27μm [50μ"]	5-1734320-4
			0.762μm [30μ"]	 5-1734320-3
			0.381μm [15μ"]	5-1734320-2
			0.152μm [6μ"]	5-1734320-1
	POSITION 2	POSITION 1	MIN. GOLD THICKNESS	PART NUMBER
	INDICATOR COLOR			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN —		 TE Connectivity			
DIMENSIONS: mm		CHK —					
		APVD —		NAME MODULAR JACK CONNECTOR RJ45, SINGLE PORT, SIDE ENTRY, DIP TYPE			
		PRODUCT SPEC —					
		APPLICATION SPEC —					
MATERIAL —		WEIGHT —		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
FINISH —		CUSTOMER DRAWING		A3	00779	C=1734320	—
				SCALE	SHEET		REV
				5 OF 6		B4	

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
© COPYRIGHT 2011 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
DW		P	LTR	DESCRIPTION	DATE	APVD
				SEE SHEET 1.		

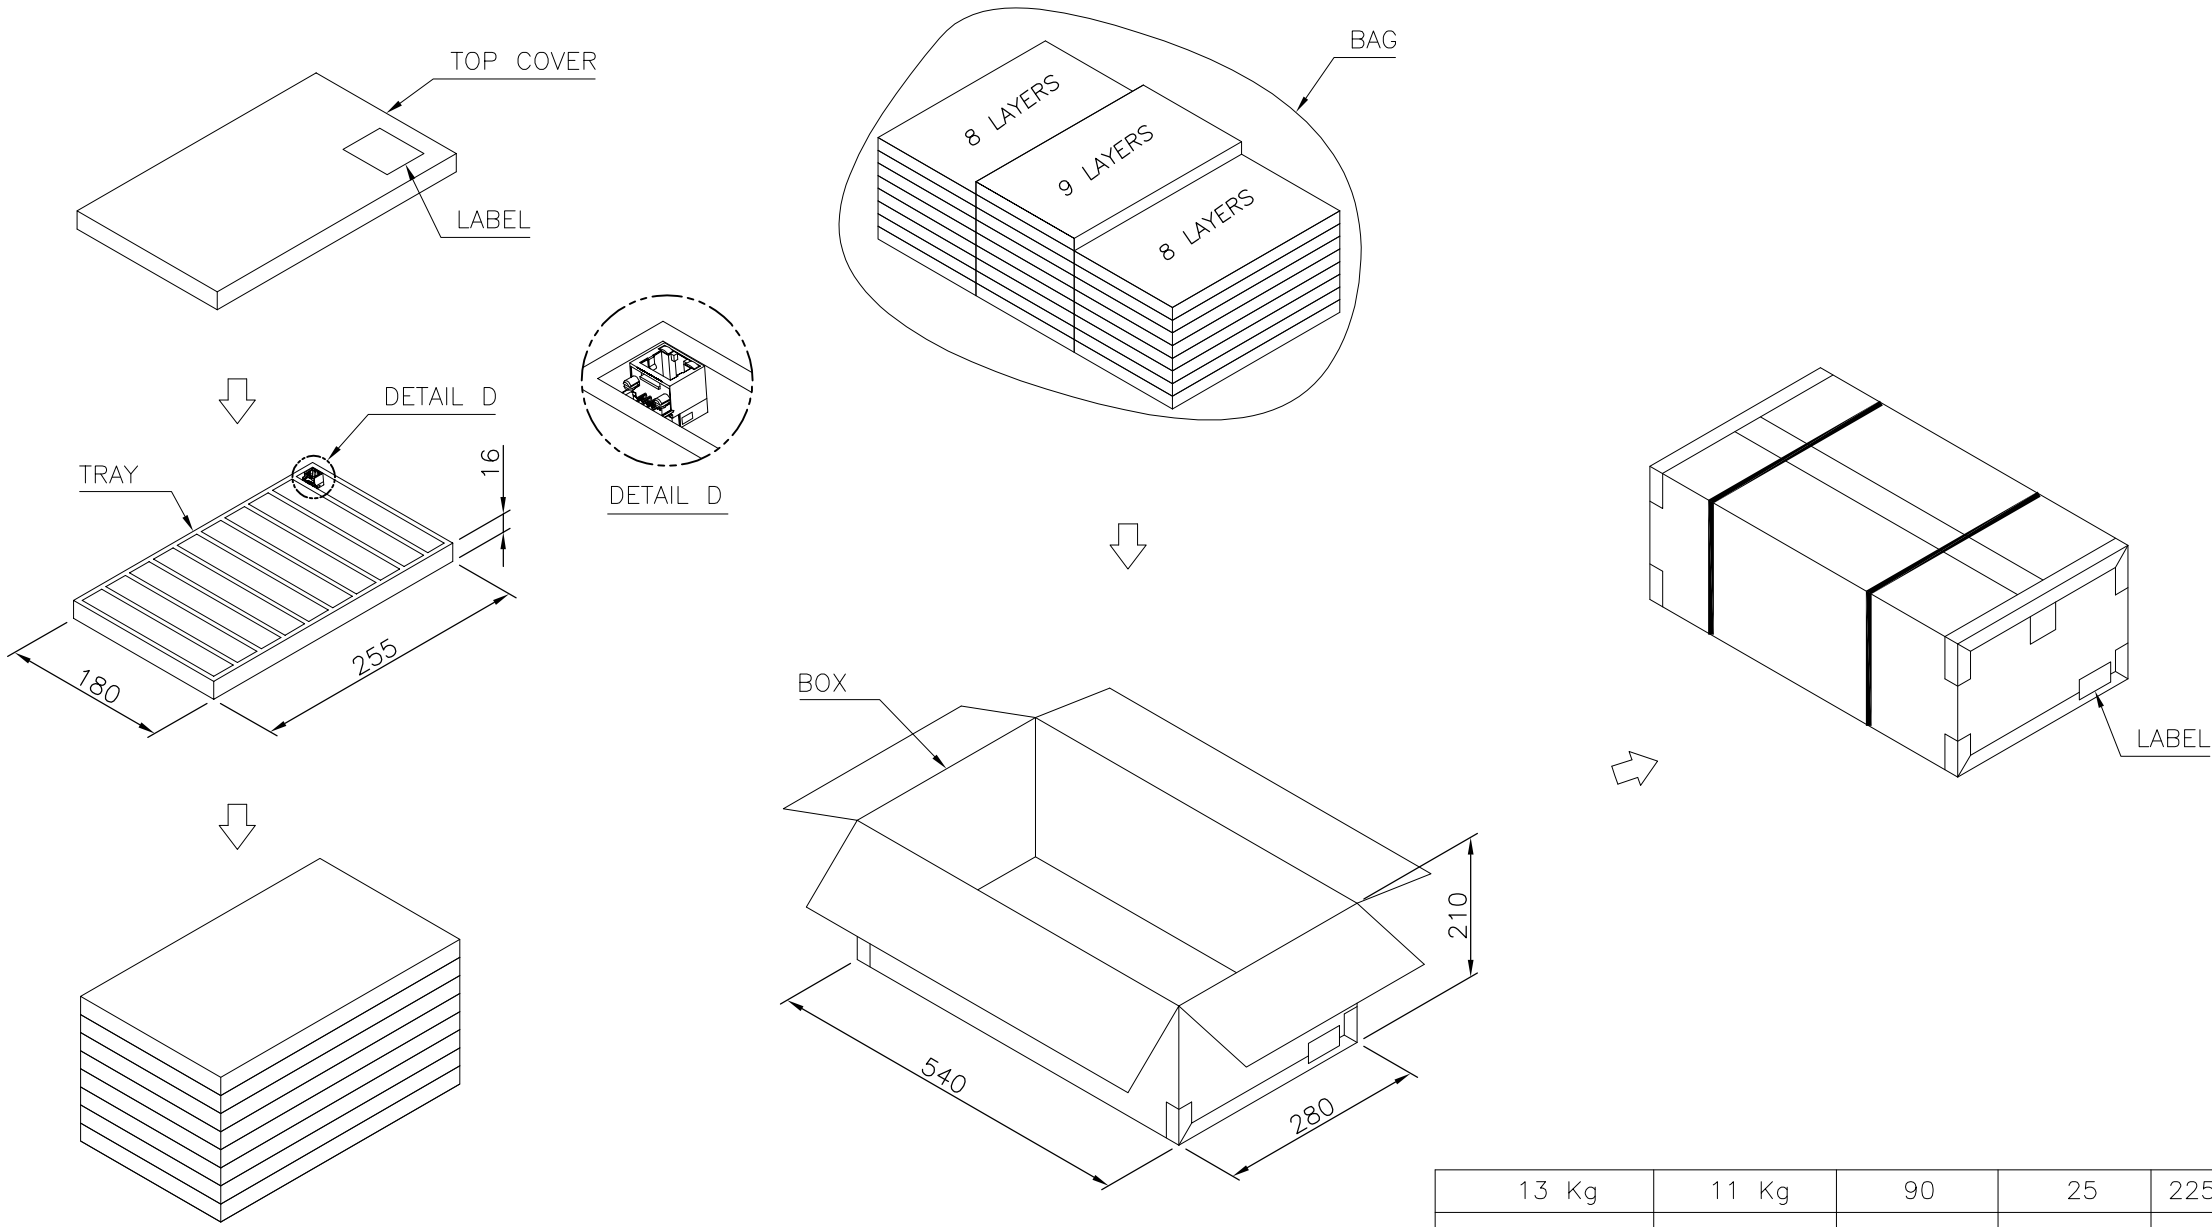

13 Kg	11 Kg	90	25	2250 PCS	3-1734320-X
14.4 Kg	12.4 Kg	100	25	2500 PCS	5-1734320-X 4-1734320-X 2-1734320-X 1-1734320-X 1734320-X
GROSS WEIGHT (Ref.)	NET WEIGHT (Ref.)	PCS/TRAY	TRAYS /BOX	QUANTITY	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity			
		CHK				
		APVD				
		PRODUCT SPEC				
DIMENSIONS: mm		APPLICATION SPEC	NAME			
		WEIGHT				
MATERIAL		CUSTOMER DRAWING	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
			A3	00779	C=1734320	
			SCALE		SHEET 6 OF 6	REV B4

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9