

# ASMT-YTD2-0BB02

## High Brightness Tricolor PLCC6 White Surface Mount LED



### Data Sheet



#### Description

The high brightness White Surface tri-color PLCC-6 family of SMT LEDs has a separate heat path for each LED dice, enabling the LED to be driven at higher current. These SMT LEDs are in the high brightness category, are high reliability devices, are high performance and are designed for a wide range of environmental conditions. They also provide super wide viewing angle at 120° with the built in reflector pushing up the intensity of the light output. The high reliability characteristics and other features make the White Surface tri-color PLCC-6 family ideally suitable for exterior and interior full color signs application conditions.

For easy pick & place, the LEDs are shipped in EIA-compliant tape and reel. Every reel is shipped from a single intensity and color bin; except red color providing better uniformity. These White Surface tri-color LEDs are compatible with reflow soldering process.

#### Features

- Industry Standard PLCC-6 package (Plastic Leaded Chip Carrier) with individual addressable pin-out for higher flexibility of driving configuration
- High reliability LED package with silicone encapsulation
- High brightness using AlInGaP and InGaN dice technologies
- Wide viewing angle at 120 °
- Compatible with reflow soldering process
- JEDEC MSL 2a
- Water-Resistance (IPX6\*) per IEC 60529:2001


\* The test is conducted on component level by mounting the components on PCB with proper potting to protect the leads. It is strongly recommended that customers perform necessary tests on the components for their final application.

#### Applications

- Indoor and outdoor full color sign display
- Gaming machine

**CAUTION:** LEDs are Class 1C ESD sensitive. Please observe appropriate precautions during handling and processing. Please refer to Avago Application Note AN-1142 for additional details.

## Package Dimensions

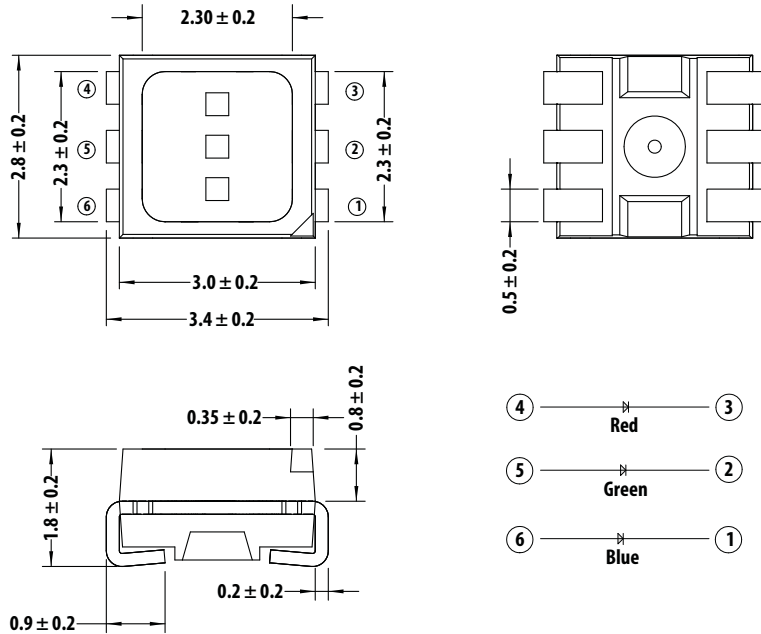

## Lead Configuration

|   |         |       |
|---|---------|-------|
| 1 | Cathode | Blue  |
| 2 | Cathode | Green |
| 3 | Cathode | Red   |
| 4 | Anode   | Red   |
| 5 | Anode   | Green |
| 6 | Anode   | Blue  |

### Notes:

1. All Dimensions are in millimeters
2. Tolerance =  $\pm 0.2$  mm unless otherwise specified
3. Terminal Finish: Ag plating
4. Encapsulation material: silicone resin


**Table 1. Device Selection Guide**

| Part Number     | Color 1 - AllInGaP Red       |       |                               |       | Color 2 - InGaN Green        |       |                               |       | Color 3 - InGaN Blue          |       |                              |       |
|-----------------|------------------------------|-------|-------------------------------|-------|------------------------------|-------|-------------------------------|-------|-------------------------------|-------|------------------------------|-------|
|                 | Min. I <sub>v</sub><br>@20mA |       | Typ. I <sub>v</sub><br>@ 20mA |       | Max I <sub>v</sub><br>@ 20mA |       | Min. I <sub>v</sub><br>@ 20mA |       | Typ. I <sub>v</sub><br>@ 20mA |       | Max I <sub>v</sub><br>@ 20mA |       |
|                 | Bin ID                       | (mcd) | (mcd)                         | (mcd) | Bin ID                       | (mcd) | (mcd)                         | (mcd) | Bin ID                        | (mcd) | (mcd)                        | (mcd) |
| ASMT-YTD2-0BB02 | U2                           | 560   | 745                           | 1125  | W1                           | 1125  | 1600                          | 2240  | T1                            | 285   | 380                          | 560   |

### Notes:

1. The luminous intensity  $I_v$  is measured at the mechanical axis of the LED package and it is tested in pulsing condition. The actual peak of the spatial radiation pattern may not be aligned with this axis.
2. Tolerance =  $\pm 12\%$

## Part Numbering System

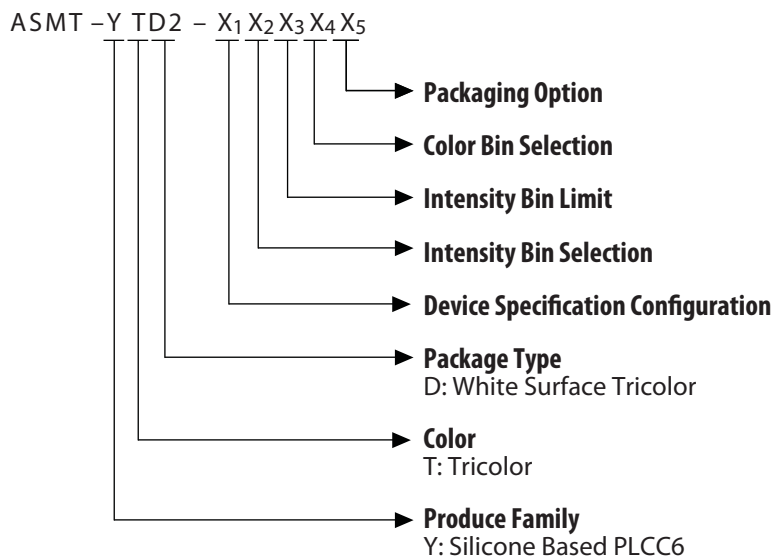

**Table 2. Absolute Maximum Ratings ( $T_A = 25^\circ\text{C}$ )**

| Parameter                                       | Red                         | Green & Blue | Unit             |
|-------------------------------------------------|-----------------------------|--------------|------------------|
| DC forward current <sup>[1]</sup>               | 50                          | 30           | mA               |
| Peak forward current <sup>[2]</sup>             | 100                         | 100          | mA               |
| Power dissipation                               | 125                         | 114          | mW               |
| Reverse voltage                                 | 4V <sup>[3]</sup>           |              | V                |
| Maximum junction temperature $T_{j\text{ max}}$ | 125                         |              | $^\circ\text{C}$ |
| Operating temperature range                     | -40 to + 110 <sup>[4]</sup> |              | $^\circ\text{C}$ |
| Storage temperature range                       | -40 to + 120                |              | $^\circ\text{C}$ |

Notes:

1. Derate linearly as shown in Figure 4a & 4b.
2. Duty Factor = 10% Frequency = 1KHz
3. Driving the LED in reverse bias condition is suitable for short term only
4. Refer to Figure 4a and figure 4b for more information

**Table 3. Optical Characteristics ( $T_A = 25^\circ\text{C}$ )**

| Color | Dominant Wavelength,<br>$\lambda_d$ (nm) <sup>[1]</sup> |      |     | Peak Wavelength,<br>$\lambda_p$ (nm) | Viewing Angle<br>$2\theta_{1/2}$ <sup>[2]</sup> (Degrees) | Luminous Efficacy<br>$\eta_V$ <sup>[3]</sup> (lm/W) | Luminous Efficiency<br>$\eta_e$ (lm/W) |
|-------|---------------------------------------------------------|------|-----|--------------------------------------|-----------------------------------------------------------|-----------------------------------------------------|----------------------------------------|
|       | Min                                                     | Typ. | Max | Typ.                                 | Typ.                                                      | Typ.                                                | Typ.                                   |
| Red   | 618                                                     | 622  | 628 | 629                                  | 120                                                       | 210                                                 | 43                                     |
| Green | 525                                                     | 530  | 537 | 521                                  | 120                                                       | 535                                                 | 75                                     |
| Blue  | 465                                                     | 470  | 477 | 464                                  | 120                                                       | 84                                                  | 15                                     |

Notes:

1. The dominant wavelength is derived from the CIE Chromaticity Diagram and represents the perceived color of the device.
2.  $\theta_{1/2}$  is the off axis angle where the luminous intensity is  $\frac{1}{2}$  the peak intensity
3. Radiant intensity,  $I_e$  in watts / steradian, may be calculated from the equation  $I_e = I_V / \eta_V$ , where  $I_V$  is the luminous intensity in candelas and  $\eta_V$  is the luminous efficacy in lumens / watt.
4.  $\Phi_V$  is the total luminous flux output as measured with an integrating sphere at mono pulse condition.

**Table 4. Electrical Characteristics ( $T_A = 25^\circ\text{C}$ )**

| Color | Forward Voltage,<br>$V_F$ (V) <sup>[1]</sup> |      |      | Reverse Voltage<br>$V_R$ @ 100 $\mu\text{A}$ | Reverse Voltage<br>$V_R$ @ 10 $\mu\text{A}$ | Thermal Resistance<br>$R\theta_{J-P}$ ( $^\circ\text{C/W}$ ) <sup>[2]</sup> |
|-------|----------------------------------------------|------|------|----------------------------------------------|---------------------------------------------|-----------------------------------------------------------------------------|
|       | Min                                          | Typ. | Max. | Min.                                         | Min.                                        | Typ                                                                         |
| Red   | 1.80                                         | 2.10 | 2.50 | 4                                            | –                                           | 280                                                                         |
| Green | 2.80                                         | 3.20 | 3.80 | –                                            | 4                                           | 180                                                                         |
| Blue  | 2.80                                         | 3.20 | 3.80 | –                                            | 4                                           | 180                                                                         |

Notes:

1. Tolerance  $\pm 0.1\text{V}$ .
2. One chip on thermal resistance

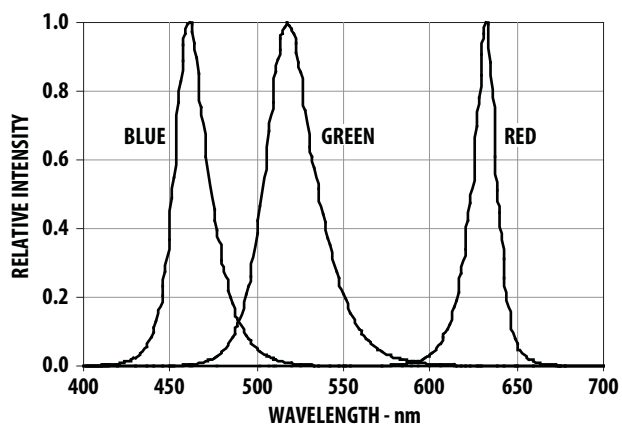


Figure 1. Relative Intensity vs Wavelength

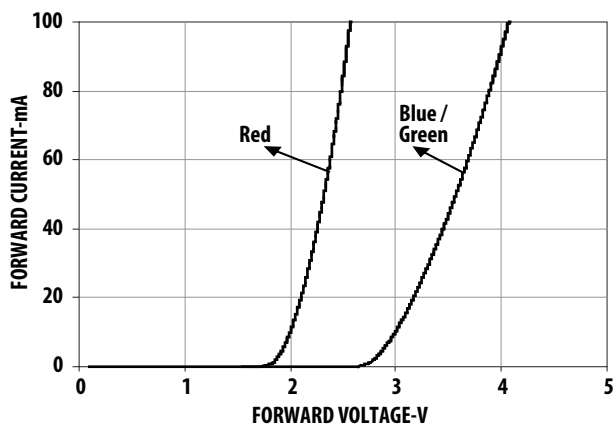


Figure 2. Forward Current-mA vs Forward Voltage-V

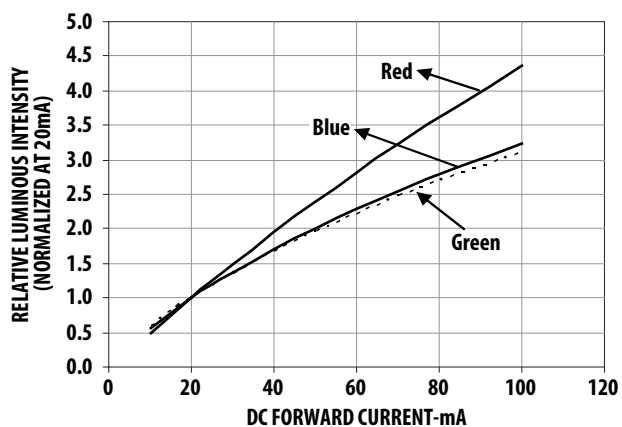


Figure 3. Relative Intensity vs Forward Current

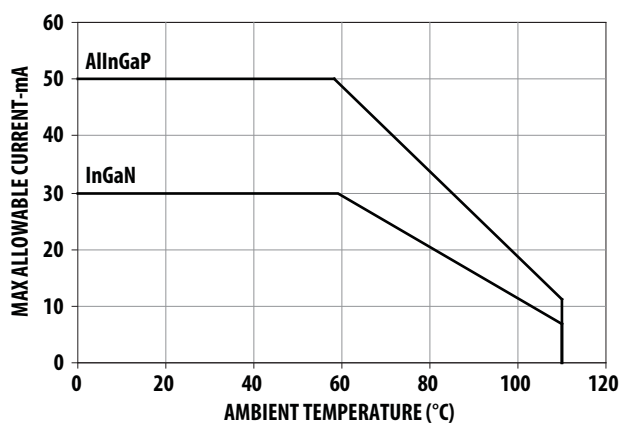


Figure 4a. Maximum forward current vs. ambient temperature. Derated based on  $T_{JMAX} = 125^{\circ}C$ . (3 chips)

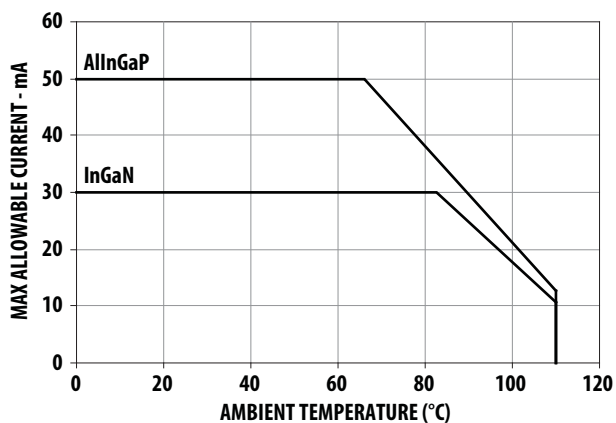


Figure 4b. Maximum forward current vs. ambient temperature. Derated based on  $T_{JMAX} = 125^{\circ}C$ . (single chip)

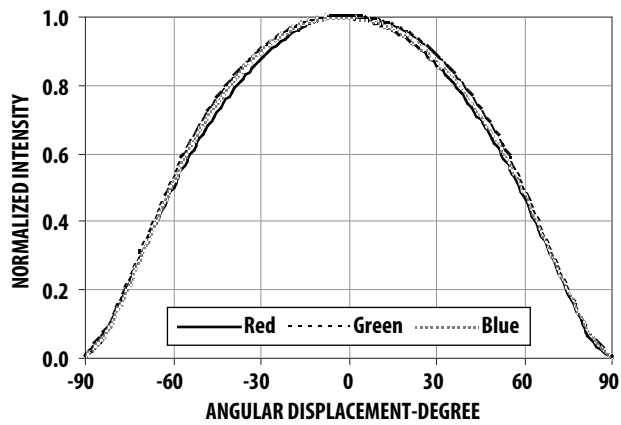


Figure 5a. Radiation Pattern for X axis

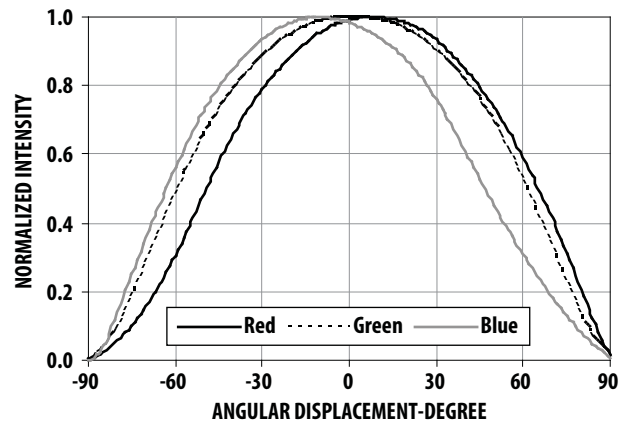


Figure 5b. Radiation Pattern for Y axis

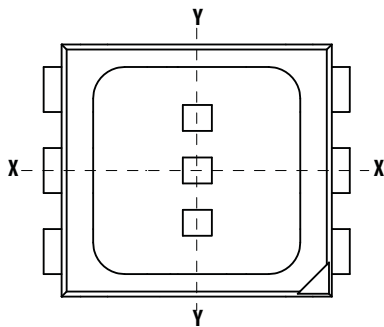


Figure 5c. Component Axis for Radiation Patterns

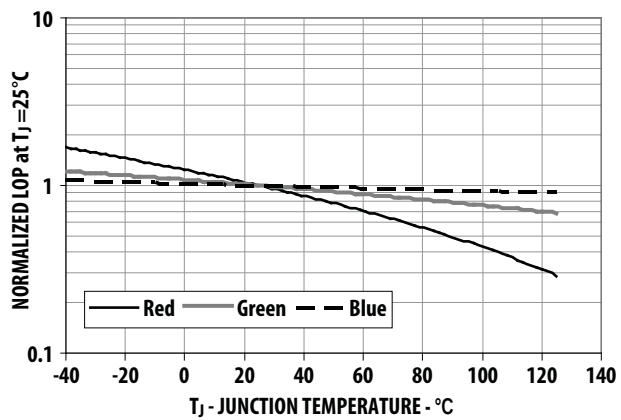


Figure 6. Relative Intensity vs Junction Temperature

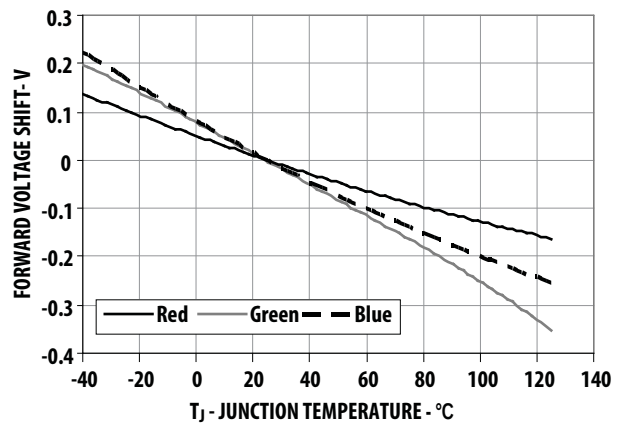


Figure 7. Forward Voltage vs Junction Temperature

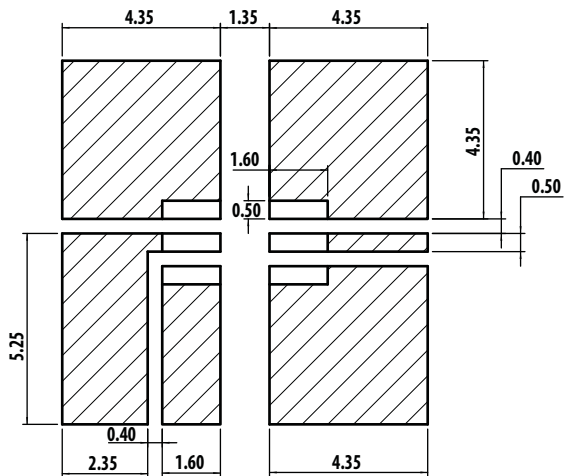


Figure 8a. Recommended soldering land pattern.


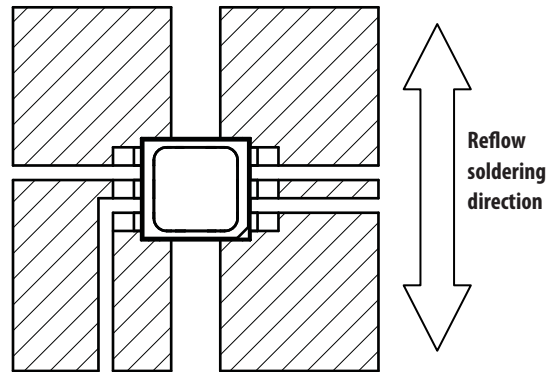


Figure 8b. LED Configuration on land pattern



ID = 1.7mm  
OD = 3.5mm

Figure 9. Recommended Pick and Place Nozzle Tip

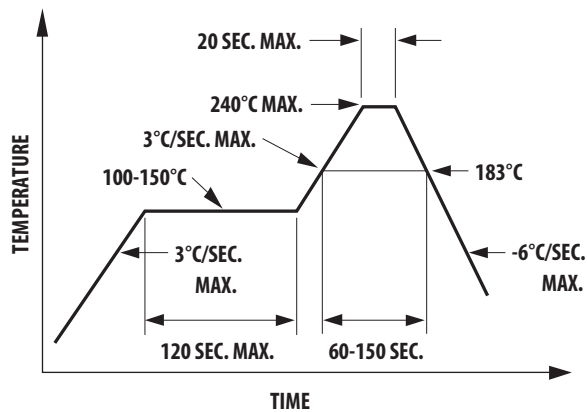


Figure 10. Recommended leaded reflow soldering profile.

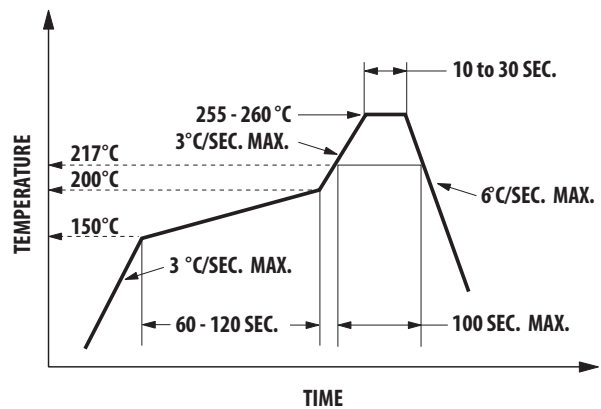


Figure 11. Recommended Pb-free reflow soldering profile.

Note: For detail information on reflow soldering of Avago surface mount LEDs, do refer to Avago Application Note AN 1060 Surface Mounting SMT LED Indicator Components

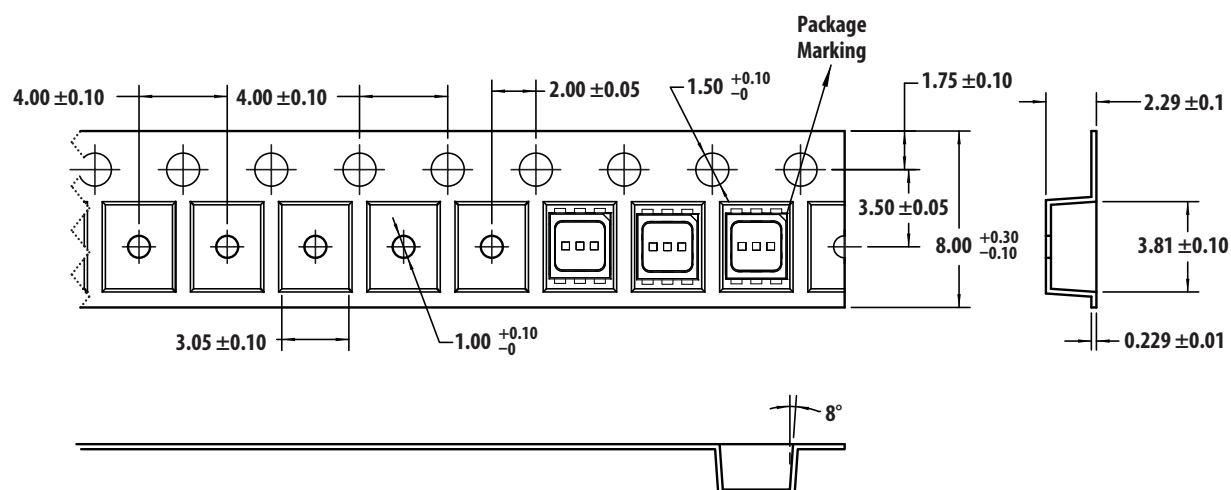


Figure 12. Carrier tape Dimension

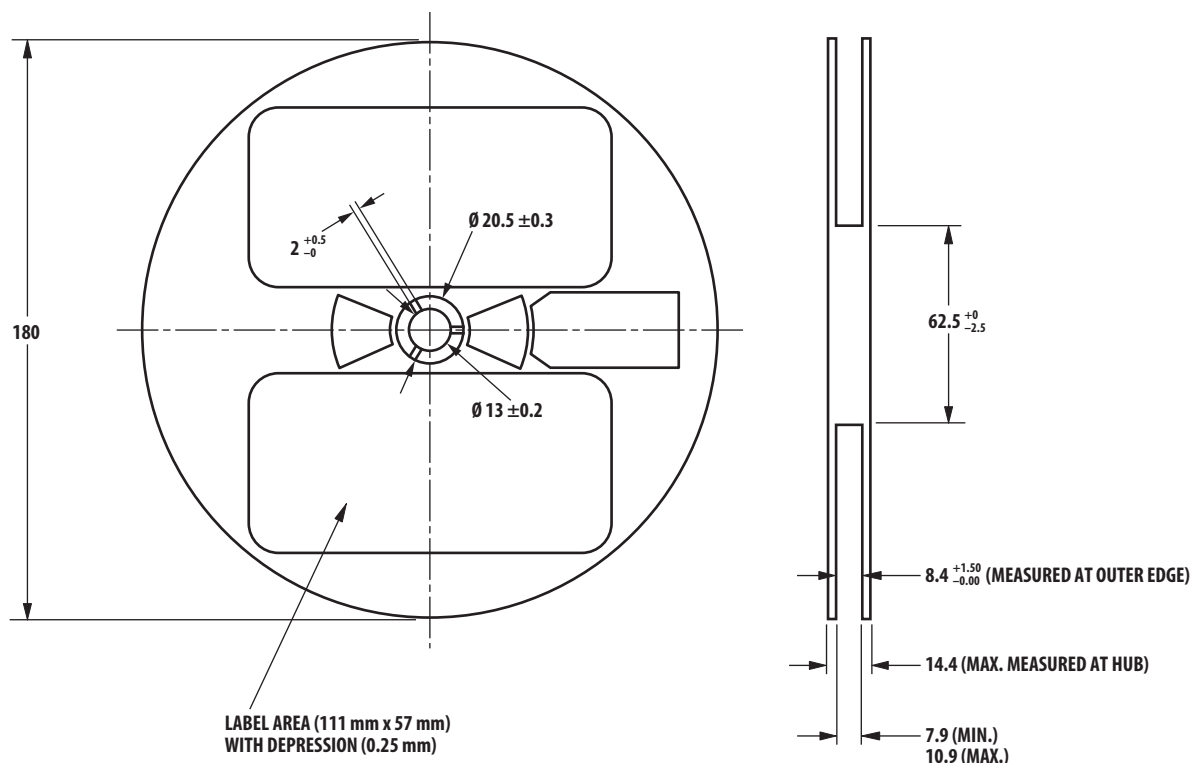


Figure 13. Reel Dimension

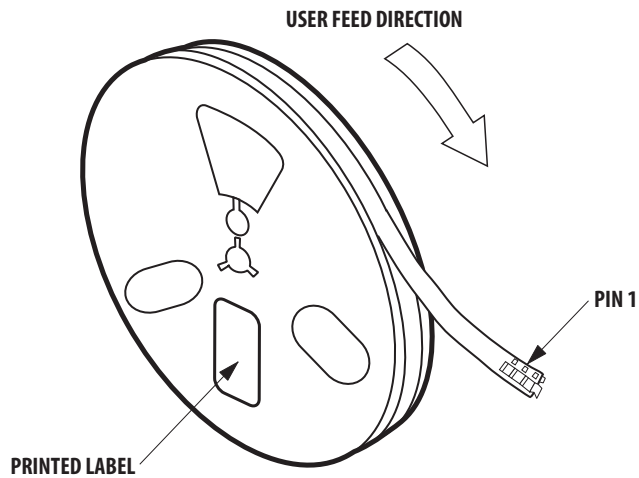


Figure 14. Reeling Orientation

### Packaging Label:

(i) Avago Mother Label (Available on MBB bags)

|                                                                                                                |                                         |
|----------------------------------------------------------------------------------------------------------------|-----------------------------------------|
| <b>Avago</b><br>TECHNOLOGIES<br>STANDARD LABEL LS0002<br>RoHS Compliant Halogen Free<br>e4 Max Temp 260C MSL2a |                                         |
| (1P) Item: Part Number<br>[Barcode]                                                                            | (Q) QTY: Quantity<br>[Barcode]          |
| (1T) Lot: Lot Number<br>[Barcode]                                                                              | CAT: Intensity Bin<br>[Barcode]         |
| LPN:<br>[Barcode]                                                                                              | BIN: Color Bin<br>[Barcode]             |
| (9D)MFG Date: Manufacturing Date<br>[Barcode]                                                                  |                                         |
| (P) Customer Item:<br>[Barcode]                                                                                |                                         |
| (V) Vendor ID:<br>[Barcode]                                                                                    | (9D) Date Code: Date Code<br>[Barcode]  |
| DeptID:<br>[Barcode]                                                                                           | Made In: Country of Origin<br>[Barcode] |

|                                                          |                                                            |
|----------------------------------------------------------|------------------------------------------------------------|
| <b>Avago</b><br>TECHNOLOGIES<br>BABY LABEL COSB001B V0.0 |                                                            |
| (1P) PART #: Part Number<br>[Barcode]                    | QUANTITY: Packing Quantity<br>[Barcode]                    |
| (1T) LOT #: Lot Number<br>[Barcode]                      | (9D): DATE CODE:<br>[Barcode]                              |
| (9D)MFG DATE: Manufacturing Date<br>[Barcode]            |                                                            |
| C/O: Country of Origin<br>[Barcode]                      |                                                            |
| (1T) TAPE DATE:<br>[Barcode]                             | D/C: Date Code VF:<br>CAT: INTENSITY BIN<br>BIN: COLOR BIN |

**CAT: V1 W1 T2**

Intensity for Blue  
Intensity for Green  
Intensity for Red

**BIN: A B**

The diagram shows two horizontal lines representing color bins. The top line is labeled 'Color Bin for Blue' and the bottom line is labeled 'Color Bin for Green'. Above the blue bin, the text 'BIN: A B' is shown. A vertical line descends from 'A' and a horizontal line connects it to the blue bin. Another vertical line descends from 'B' and a horizontal line connects it to the green bin.

|       | Color Bin Combinations |         |               |
|-------|------------------------|---------|---------------|
| $X_4$ | Red                    | Green   | Blue          |
| 0     | Full distribution      | A, B, C | A, B, C, D, E |

## Color Bin Limits

### Red Color Bin Table

| Bin ID            | Min Dom | Max Dom |   |        |        |        |        |
|-------------------|---------|---------|---|--------|--------|--------|--------|
| Full Distribution | 618     | 628     | x | 0.6873 | 0.6696 | 0.6866 | 0.7052 |
|                   |         |         | y | 0.3126 | 0.3136 | 0.2967 | 0.2948 |

Tolerance of each bin limit is  $\pm 1$  nm

### Green Color Bin Table

| Bin ID | Min Dom | Max Dom |   |        |        |        |        |
|--------|---------|---------|---|--------|--------|--------|--------|
| A      | 525.0   | 531.0   | x | 0.1142 | 0.1799 | 0.2138 | 0.1625 |
|        |         |         | y | 0.8262 | 0.6783 | 0.6609 | 0.8012 |
| B      | 528.0   | 534.0   | x | 0.1387 | 0.1971 | 0.2298 | 0.1854 |
|        |         |         | y | 0.8148 | 0.6703 | 0.6507 | 0.7867 |
| C      | 531.0   | 537.0   | x | 0.1625 | 0.2138 | 0.2454 | 0.2077 |
|        |         |         | y | 0.8012 | 0.6609 | 0.6397 | 0.7711 |

Tolerance of each bin limit is  $\pm 1$  nm

### Blue Color Bin Table

| Bin ID | Min Dom | Max Dom | Corner Point | 1      | 2      | 3      | 4      |
|--------|---------|---------|--------------|--------|--------|--------|--------|
| A      | 465.0   | 469.0   | x            | 0.1355 | 0.1751 | 0.168  | 0.127  |
|        |         |         | y            | 0.0399 | 0.0986 | 0.1094 | 0.053  |
| B      | 467.0   | 471.0   | x            | 0.1314 | 0.1718 | 0.1638 | 0.122  |
|        |         |         | y            | 0.0459 | 0.1034 | 0.1167 | 0.063  |
| C      | 469.0   | 473.0   | x            | 0.1267 | 0.168  | 0.1593 | 0.116  |
|        |         |         | y            | 0.0534 | 0.1094 | 0.1255 | 0.074  |
| D      | 471.0   | 475.0   | x            | 0.1215 | 0.1638 | 0.1543 | 0.1096 |
|        |         |         | y            | 0.0626 | 0.1167 | 0.1361 | 0.0868 |
| E      | 473.0   | 477.0   | x            | 0.1158 | 0.1593 | 0.1489 | 0.1028 |
|        |         |         | y            | 0.0736 | 0.1255 | 0.1490 | 0.1029 |

Tolerance of each bin limit is  $\pm 1$  nm

### Packaging Option (X<sub>5</sub>)

| Option | Test Current | Reel Size |
|--------|--------------|-----------|
| 2      | 20mA         | 7 inch    |

## Handling Precaution

The encapsulation material of the LED is made of silicone for better product reliability. Since silicone is a soft material, avoid pressing on the silicon or poking the silicon with a sharp object as the product could be damaged and cause premature failure. During assembly handling, the unit should be held by the body only. Please refer to Avago Application Note AN 5288 for additional handling information and proper procedures.

## Moisture Sensitivity

This product has a Moisture Sensitive Level 2a rating per JEDEC J-STD-020. Refer to Avago Application Note AN5305, *Handling of Moisture Sensitive Surface Mount Devices*, for additional details and a review of proper handling procedures.

### A. Storage before use

- An Unopened moisture barrier bag (MBB) can be stored at <40°C/90%RH for 12 months. If the actual shelf life has exceeded 12 months and the humidity Indicator Card (HIC) indicates that baking is not required, then it is safe to reflow the LEDs per the original MSL rating.
- It is recommended that the MBB not be opened prior to assembly (e.g. for IQC).

### B. Control after opening the MBB

- The humidity indicator card (HIC) shall be read immediately upon opening of MBB.
- The LEDs must be kept at <30°C/60%RH at all times and all high temperature related processes including soldering, curing or rework need to be completed within 672 hours.

### C. Control for unfinished reel

- Unused LEDs must be stored in a sealed MBB with desiccant or desiccator at <5%RH.

### D. Control of assembled boards

- If the PCB soldered with the LEDs is to be subjected to other high temperature processes, the PCB need to be stored in sealed MBB with desiccant or desiccator at <5%RH to ensure that all LEDs have not exceeded their floor life of 672 hours.

### E. Baking is required if:

- The HIC indicator is not BROWN at 10% and is AZURE at 5%.
- The LEDs are exposed to condition of >30°C/60% RH at any time.
- The Led floor life exceeded 672hrs.

The recommended baking condition is: 60±5°C for 20hrs

**DISCLAIMER:** Avago's products and software are not specifically designed, manufactured or authorized for sale as parts, components or assemblies for the planning, construction, maintenance or direct operation of a nuclear facility or for use in medical devices or applications. Customer is solely responsible, and waives all rights to make claims against avago or its suppliers, for all loss, damage, expense or liability in connection with such use.

For product information and a complete list of distributors, please go to our web site: [www.avagotech.com](http://www.avagotech.com)

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9