


3M™ HIGH ROUTABILITY INTERNAL MINISAS CABLE ASSEMBLY, 8F36 SERIES

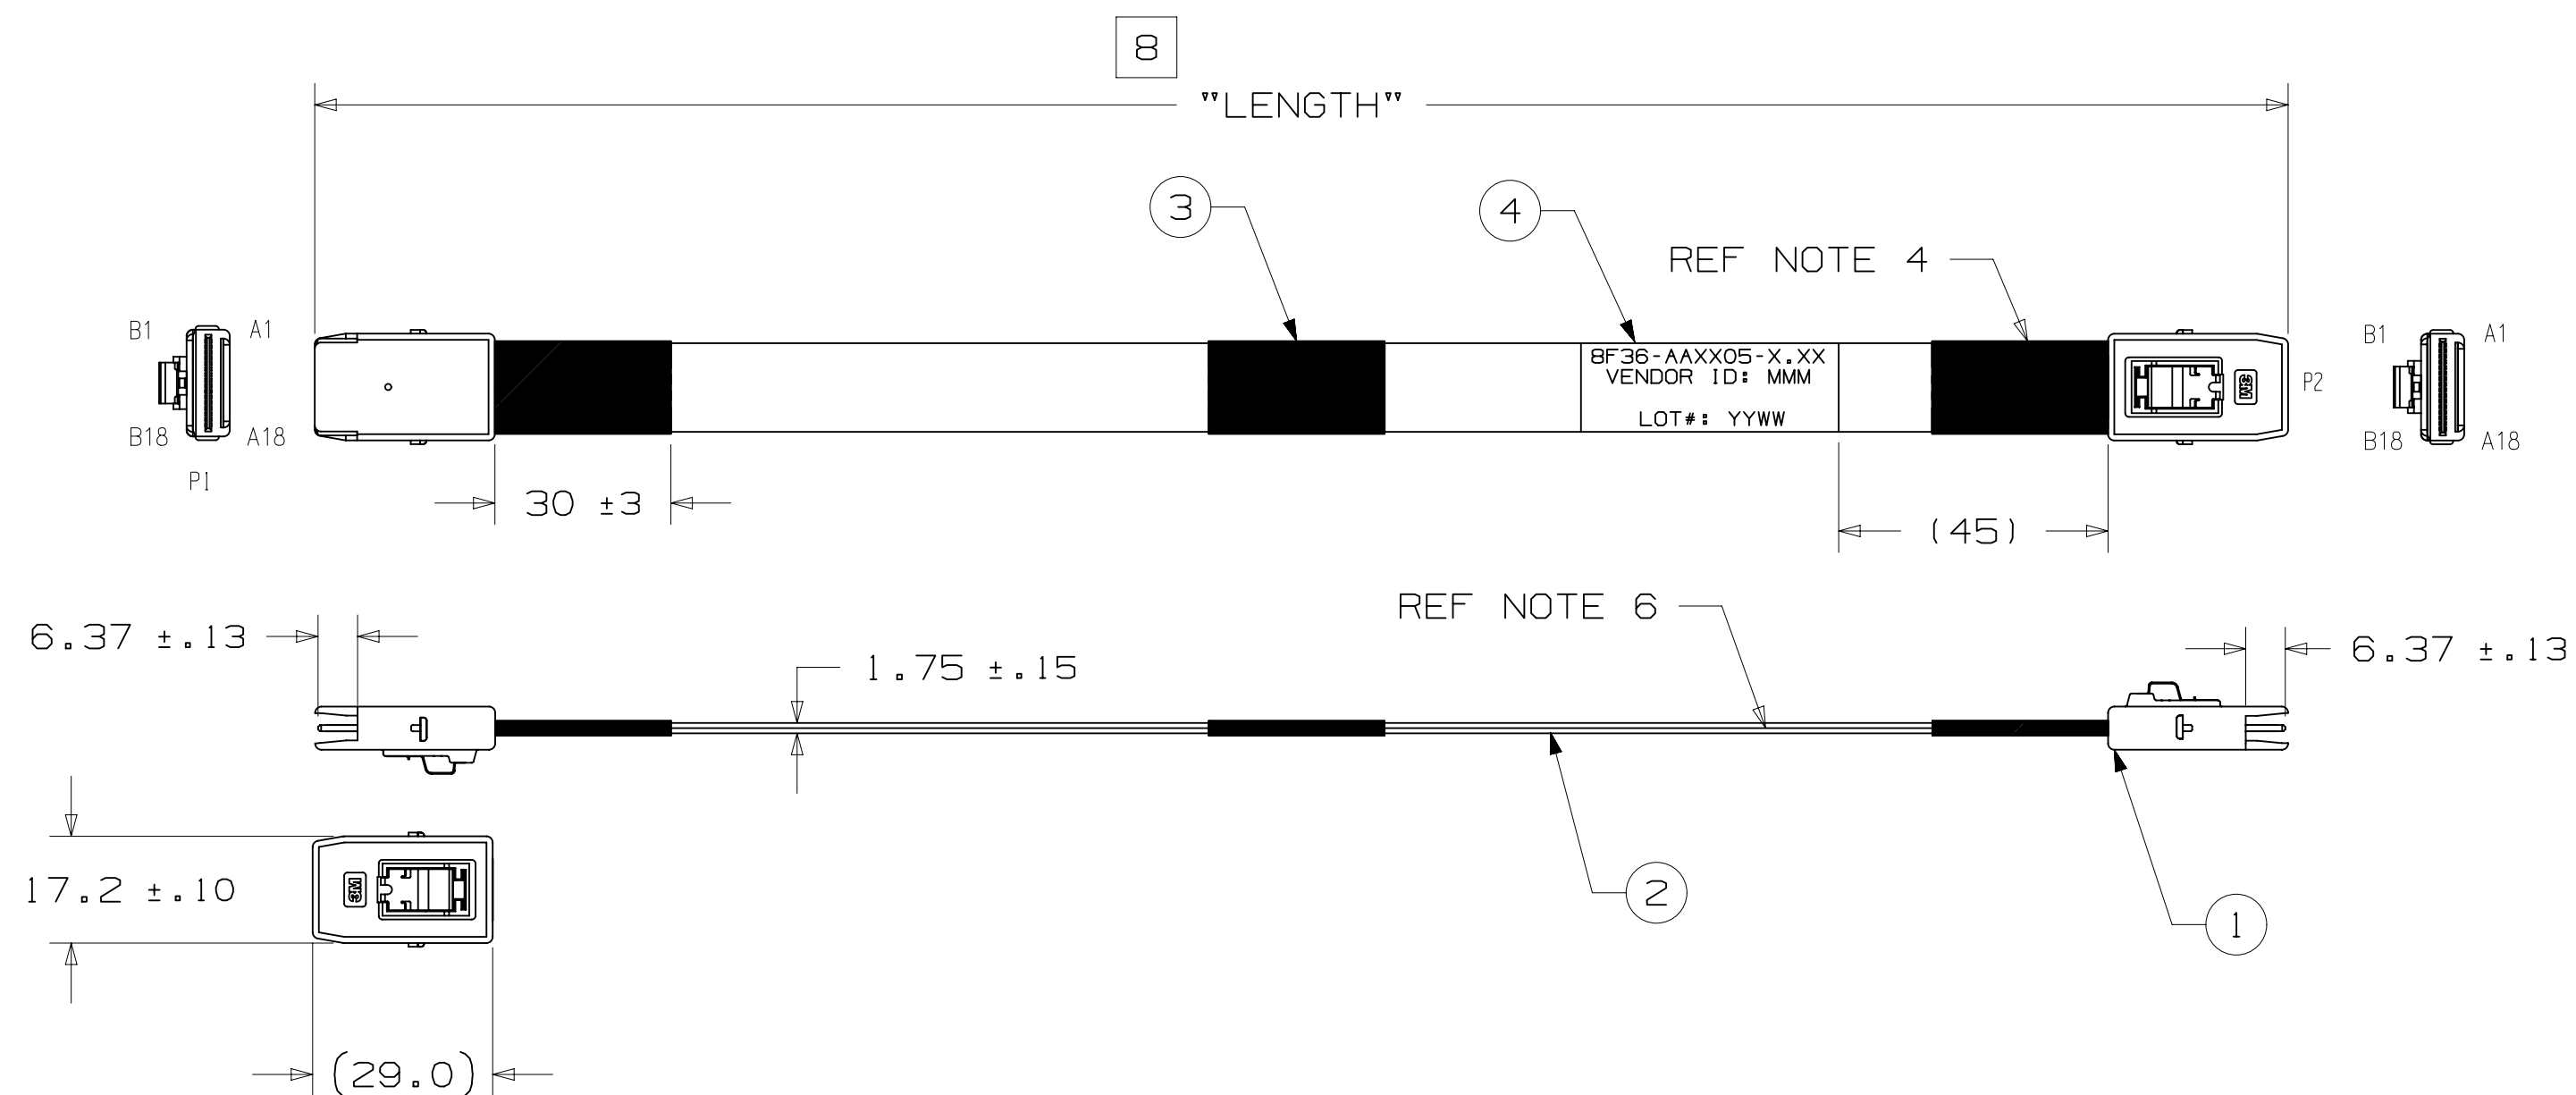

8 F 36 - AA X X 05 - X.XX

LENGTH IN METERS

- PINOUT (SEE PINOUTS ON SHEET 2)

CABLE USED


A	4-LANE WITH SIDEBANDS,	SN-PLATED SIGNAL,CABLE	P/N	SL8801/12-11DA5-00
B	4-LANE WITH SIDEBANDS,	AG-PLATED SIGNAL,CABLE	P/N	SL8801/12-10DA5-00
C	4-LANE NO SIDEBANDS,	SN-PLATED SIGNAL,CABLE	P/N	SL8802/08-21DN5-00
D	4-LANE NO SIDEBANDS,	AG-PLATED SIGNAL,CABLE	P/N	SL8802/08-20DN5-00

Visit <http://www.3Mconnector.com>

NOTES

1. ROHS COMPLIANT. SEE REGULATORY INFORMATION APPENDIX IN "RoHS COMPLIANCE" SECTION AT WWW.3M.COM/INTERCONNECT. (E1 & C1 APPLY).
2. PADDLECARD PLATING:
30 μ " MIN. GOLD PLATING
50 μ " MIN. NICKEL UNDERPLATING.
CABLE A & B : 78-9101-1588-6.
CABLE C & D : 78-9101-0933-5.
3. MINISAS CABLE PLUG DIMENSIONS SHALL CONFORM WITH SFF-8086 AND SFF-8087 STANDARDS.
4. CLOTH TAPE WRAPPED AROUND CABLE RIBBONS AT BACK OF EACH CONNECTOR. ALSO, UP TO TWO ADDITIONAL TAPE PIECES WILL BE WRAPPED AROUND THE TWO CABLE RIBBONS SPACED EQUIDISTANT FROM THE CONNECTOR ENDS AND EACH OTHER, DEPENDING ON ASS'Y LENGTH (L):
L <= 0.2M: NO ADDITIONAL TAPE
0.2M < L <= 0.6M: 1 TAPE WRAP
0.6M < L <= 1.0M: 2 TAPE WRAP
5. PRODUCT SPECIFICATION:
#PS-0082.
6. TWO RIBBONS OF 3M RIBBON TWIN AXIAL CABLE.
7. THIS CABLE CONSTRUCTION HAS A THIN ALUMINUM LAYER AT EACH EDGE USER SHOULD EVALUATE ITS USE IN THEIR APPLICATION AND, IF NECESSARY, INSULATING TAPE MAY BE APPLIED TO COVER THE ALUMINUM LAYER, AS USER DEEMS APPROPRIATE.
8. LENGTH TOLERANCE:
±10MM FOR LENGTH <= 0.5 METERS
±15MM FOR LENGTH > 0.5 METERS.

C	43801	OCT 12, 2012		RAO	MARK
B	37070	OCT 25, 2011		JNC	ML
A	30167	AUG 09, 2010		ML	ML
REV		ECO		ISSUE DATE AND DESCRIPTION	
DRAFT		DATE		MFG	
RAO VITTAPALLI		JUN 06, 2012		MING KHIANG	
CHKD		DATE		APPL	
MARK LETTANG		JUN 06, 2012		ALAN ANG	
		3M Center St. Paul, MN 55144		© 3M COPYRIGHT 2013 This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.	
TITLE					
CABLE ASSEMBLY INTERNAL 36P MINISAS RIBBON TWINAX					
CAGE NUMBER		SIZE		DRAWING NO.	
C		78-5100-2363-9		REV.	
MODEL		DET. LISTS ☐ YES ☒ NO		SHT 1 OF 2	

DESIGN REFERENCE		NEXT ASSEMBLY	
DISTRIBUTION CODES			
DIVISION		DIVISION CODE	
Interconnect Solutions		ISD	
DO NOT SCALE DRAWING	SCALE	TOLERANCES EXCEPT AS NOTED	
		INCHES	
THIRD ANGLE PROJECTION		$\begin{matrix} .0 & \pm \\ .00 & \pm \\ .000 & \pm \\ .0000 & \pm \end{matrix}$	
INTERPRET PER ASME Y14.5 - 1994		MILLIMETERS	
MAX SURFACE ROUGHNESS		$\begin{matrix} 0 & \pm \\ .0 & \pm \\ .00 & \pm \\ .000 & \pm \end{matrix}$	
☐ UNL SURFACES ☒ MARKED ONLY		ANGLES $\pm$	

3M™ HIGH ROUTABILITY INTERNAL MINISAS CABLE ASSEMBLY, 8F36 SERIES

PINOUT 1
BACKPLANE-TO-CONTROLLER

P1		P2	
A1	GND	B1	GND
A2	Rx 0+	B2	Tx 0+
A3	Rx 0-	B3	Tx 0-
A4	GND	B4	GND
A5	Rx 1+	B5	Tx 1+
A6	Rx 1-	B6	Tx 1-
A7	GND	B7	GND
A8	SIDEBAND	B8	SIDEBAND
A9	SIDEBAND	B9	SIDEBAND
A10	SIDEBAND	B10	SIDEBAND
A11	SIDEBAND	B11	SIDEBAND
A12	GND	B12	GND
A13	Rx 2+	B13	Tx 2+
A14	Rx 2-	B14	Tx 2-
A15	GND	B15	GND
A16	Rx 3+	B16	Tx 3+
A17	Rx 3-	B17	Tx 3-
A18	GND	B18	GND


NOTE:
1. A1, A4, A7, A12, A15, A18, B1, B4, B7, B12, B15 AND B18 ARE ALL REFERENCE GROUNDS AND ARE SHORTED TOGETHER THROUGH THE PADDLECARD GROUND PLANES.

PINOUT 3
BACKPLANE-TO-CONTROLLER (NO SIDEBANDS)

P1		P2	
A1	GND	B1	GND
A2	Rx 0+	B2	Tx 0+
A3	Rx 0-	B3	Tx 0-
A4	GND	B4	GND
A5	Rx 1+	B5	Tx 1+
A6	Rx 1-	B6	Tx 1-
A7	GND	B7	GND
A12	GND	B12	GND
A13	Rx 2+	B13	Tx 2+
A14	Rx 2-	B14	Tx 2-
A15	GND	B15	GND
A16	Rx 3+	B16	Tx 3+
A17	Rx 3-	B17	Tx 3-
A18	GND	B18	GND

P1		P2	
B1	GND	A1	GND
B2	Tx 0+	A2	Rx 0+
B3	Tx 0-	A3	Rx 0-
B4	GND	A4	GND
B5	Tx 1+	A5	Rx 1+
B6	Tx 1-	A6	Rx 1-
B7	GND	A7	GND
B12	GND	A12	GND
B13	Tx 2+	A13	Rx 2+
B14	Tx 2-	A14	Rx 2-
B15	GND	A15	GND
B16	Tx 3+	A16	Rx 3+
B17	Tx 3-	A17	Rx 3-
B18	GND	A18	GND

NOTE:
1. A1, A4, A7, A12, A15, A18, B1, B4, B7, B12, B15 AND B18 ARE ALL REFERENCE GROUNDS AND ARE SHORTED TOGETHER THROUGH THE PADDLECARD GROUND PLANES.
2. A8-A11 AND B8-B11 HAVE NO CONNECTIONS TO CABLE.

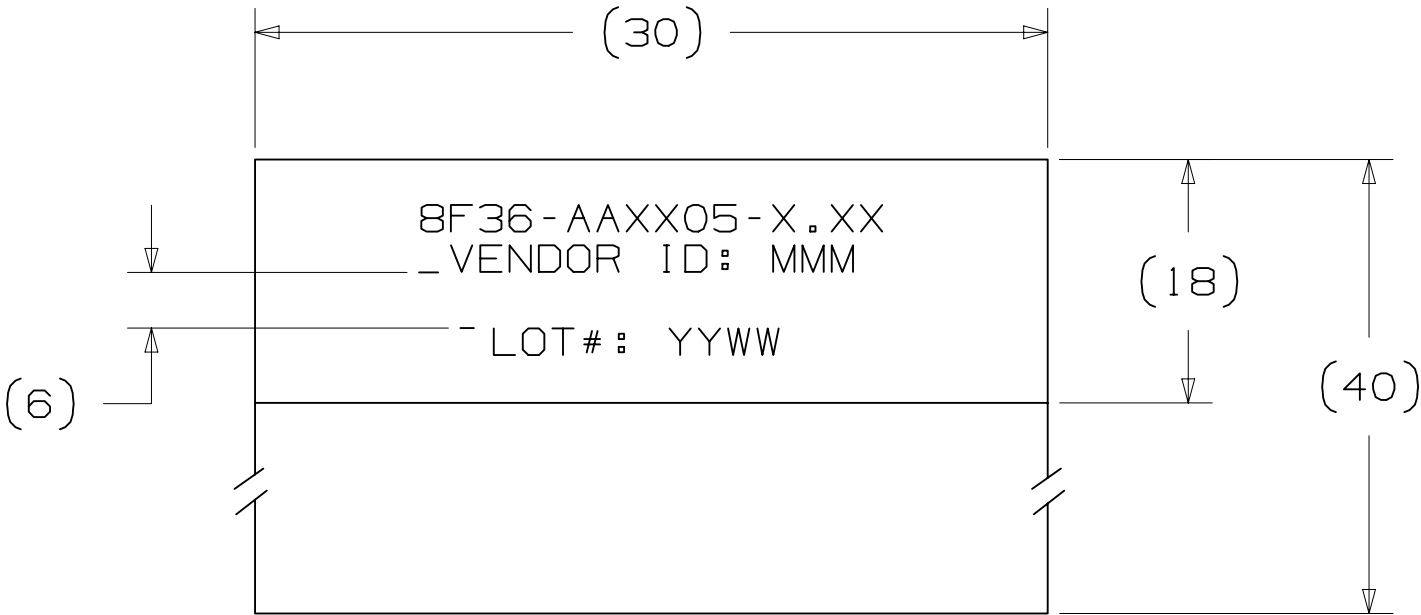

4	LABEL 30X40MM	1X
3	ACETATE TAPE	AS REQUIRED
2	CABLE RIBBON TWINAX , 150V ,80 C 30AWG AG/SN PLATED. REFER TO SHEET 1 FOR SELECTION.	AS PER LENGTH
1	36 PIN MINISAS CONNECTOR, PCB FR4, OVERMOULD -PBT 30% GF, LATCH -STAINLESS STEEL.	2X
ITEM	SPECIFICATION	QUANTITY

C	43801	OCT 12,2012	RAO	MARK
B	37070	OCT 25,2011	JNC	ML
A	30167	AUG 09,2010	ML	ML
		RELEASED		

DESIGN REFERENCE				NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
DISTRIBUTION CODES						DRFT	RAO VITTAPALLI	DATE	JUN 06,2012	MFG	MING KHIANG
						DATE	JUN 06,2012	DATE	JUN 06,2012		
DIVISION Interconnect Solutions				DIVISION CODE ISD		CHKD	MARK LETTANG	DATE	JUN 06,2012	APPL	ALAN ANG
						DATE	JUN 06,2012	DATE	JUN 06,2012		
DO NOT SCALE DRAWING				SCALE ---		3M 3M Center St. Paul, MN 55144		© 3M COPYRIGHT 2013 This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.			
TOLERANCES EXCEPT AS NOTED		INCHES .0 ± .00 ± .000 ± .0000 ±									
THIRD ANGLE PROJECTION				INTERPRET PER ASME Y14.5 - 1994		CAGE NUMBER SIZE DRAWING NO. REV.		78-5100-2363-9 C			
MAX SURFACE ROUGHNESS ☒ ALL SURFACES ☐ MARKED ONLY		MILLIMETERS .0 ± .00 ± .000 ±									
ANGLES 1				MODEL		DET. LISTS ☐ YES ☒ NO		SHT 2 OF 2			

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9