



SEOUL SEMICONDUCTOR

# Specification

# C8WT803

SSC		CUSTOMER
Drawn	Approval	Approval

Rev.06

September 2011

[www.seoulsemicon.com](http://www.seoulsemicon.com)

SSC- QP- 7- 07- 24 (Rev.00)



# CONTENTS

1. Description
2. Absolute Maximum Ratings
3. Electro-Optical Characteristics
4. Optical characteristics
5. Reliability Test
6. Color & Binning
7. Bin Code Description
8. Outline Dimension
9. Reel Structure
10. Packing
11. Soldering
12. Precaution for use
13. Handling of Silicone Resin LEDs



# C8WT803

# C8WT803

## 1. Description

This surface-mount LED comes in standard package dimension.

It has a substrate made up of a molded plastic reflector sitting on top of a bent lead frame.

The die is attached within the reflector cavity and the cavity is encapsulated by silicone.

The package design coupled with careful selection of component materials allow these products to perform with high reliability.



## Features

- White colored SMT package.
- Pb-free Reflow Soldering Application
- Suitable for all SMT assembly methods ;  
Suitable for all soldering methods
- RoHS Compliant

## Applications

- Interior lighting
- General lighting
- Indoor and out door displays
- Architectural / Decorative lighting

Rev.06

September 2011

[www.seoulsemicon.com](http://www.seoulsemicon.com)

SSC- QP- 7- 07- 24 (Rev.00)



## 2. Absolute maximum ratings [1]

Parameter	Symbol	Value	Unit
<b>Power Dissipation</b>	P <sub>d</sub>	111	mW
<b>Forward Current</b>	I <sub>F</sub>	30	mA
<b>Operating Temperature</b>	T <sub>opr</sub>	-40~+85	°C
<b>Storage Temperature</b>	T <sub>stg</sub>	-40~+100	°C
<b>Junction Temperature</b>	T <sub>j</sub>	125	°C

[1] Care is to be taken that power dissipation does not exceed the absolute maximum rating of the product.  
 \* LED's properties might be different from suggested values like above and below tables if operation condition will be exceeded our parameter range.

## 3. Electro-Optical characteristics

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
<b>Forward Voltage</b>	V <sub>F</sub>	I <sub>F</sub> =20mA	2.9	3.2	3.4	V
<b>Reverse Voltage</b>	I <sub>R</sub>	V <sub>F</sub> =5V	-	-	10	µA
<b>Luminous Intensity*[1]</b>	I <sub>v</sub>	I <sub>F</sub> =20mA	-	1,800	-	Mcd
<b>Color Correlated Temperature</b>	CCT	I <sub>F</sub> =20mA	2,600	-	7,000	K
<b>Viewing Angle [2]</b>	2θ <sub>1/2</sub>	I <sub>F</sub> =20mA	-	115	-	deg.
<b>Color Rendering Index*</b>	Ra	I <sub>F</sub> =20mA	75	80	-	-
<b>ESD (HBM)</b>		1.5kΩ;100pF	1	-	-	KV
<b>Thermal resistance [3]</b>	R <sub>thJS</sub>	I <sub>F</sub> =20mA		76		°C/W

[1] The luminous intensity IV was measured at the peak of the spatial pattern which may not be aligned with the mechanical axis of the LED package.

[2] 2θ<sub>1/2</sub> is the off-axis where the luminous intensity is 1/2 of the peak intensity.

[3] Thermal resistance: R<sub>thJS</sub> (Junction / solder)

\* Tolerance : VF :± 0.1V, IV :± 10%, Ra :± 3, x,y :± 0.01

[Note] All measurements were made under the standardized environment of SSC.

Rev.06

September 2011


[www.seoulsemicon.com](http://www.seoulsemicon.com)

SSC- QP- 7- 07- 24 (Rev.00)

#### 4. Optical characteristics


Forward Voltage  
vs. Forward Current

T<sub>a</sub>=25 °C

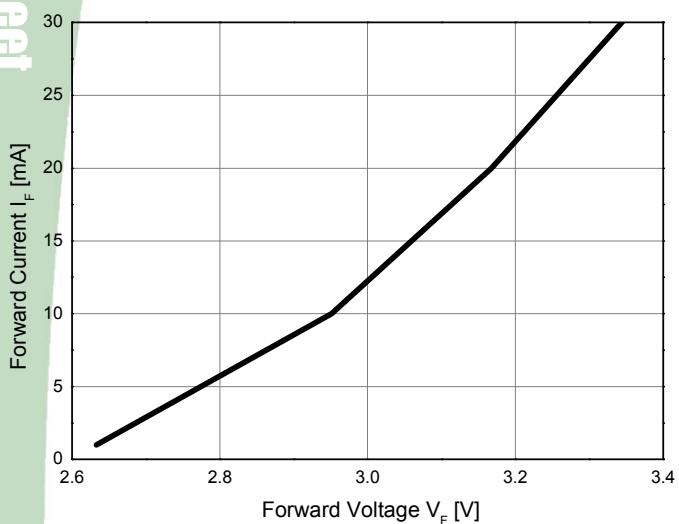


Forward Current  
vs. Relative Luminous Intensity

T<sub>a</sub>=25 °C

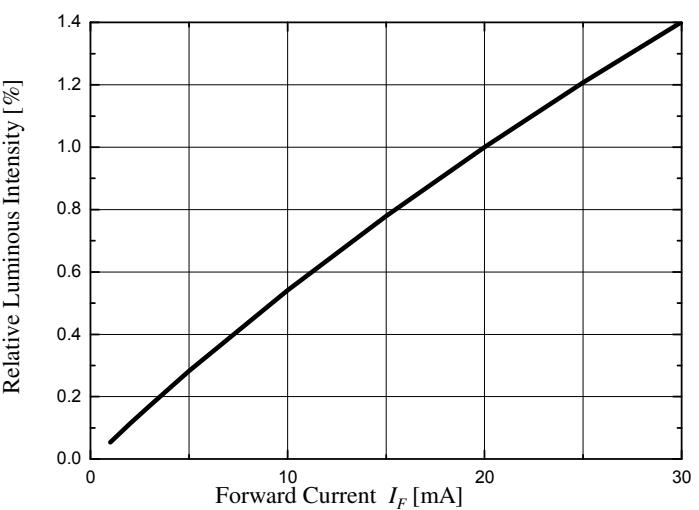


Forward Current  
vs. Chromaticity Coordinate

T<sub>a</sub>=25 °C

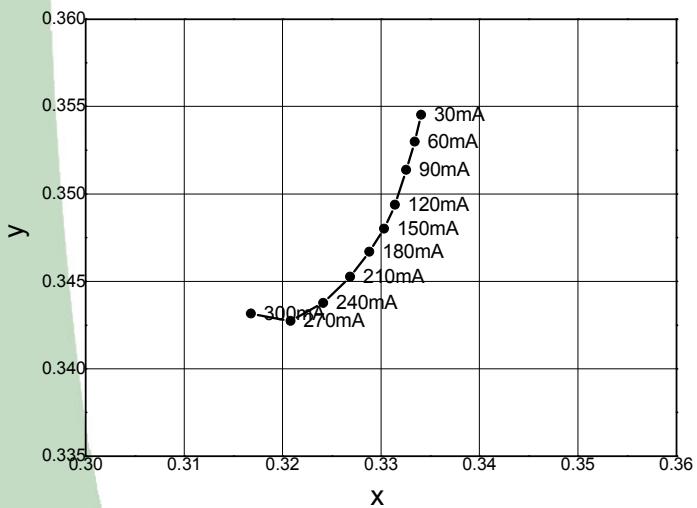

Directivity

T<sub>a</sub>=25 °C

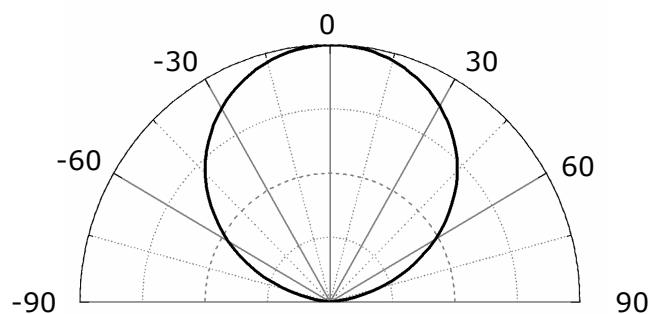

Rev.06


September 2011

[www.seoulsemicon.com](http://www.seoulsemicon.com)


SSC-QP-7-07-24 (Rev.00)

#### 4. Optical characteristics


Forward Voltage Shift  
vs. Junction Temperature

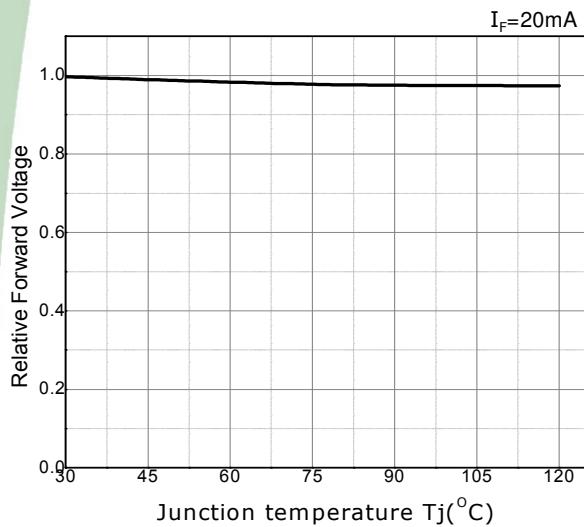

Relative Light Output  
vs. Junction Temperature

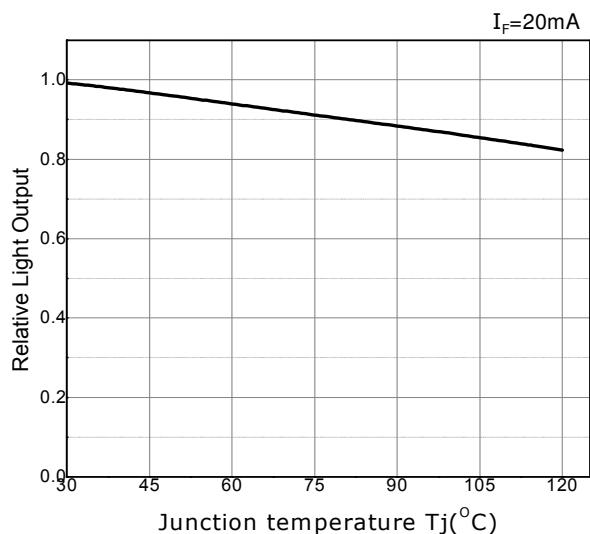


Junction Temperature ( $^{\circ}\text{C}$ )  
vs. Chromaticity Coordinate

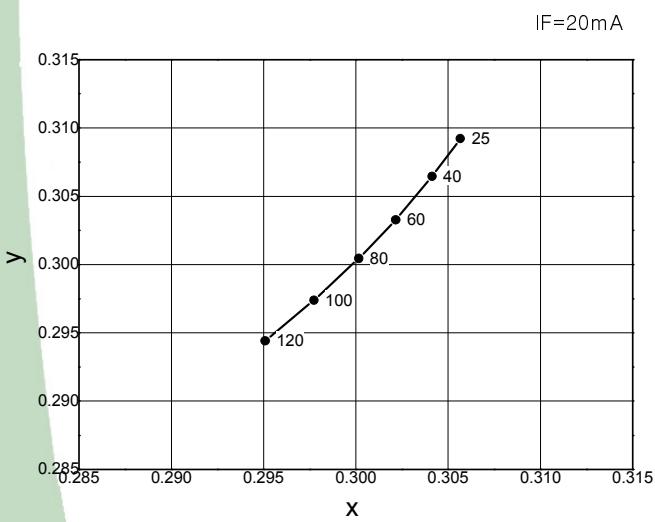


#### 4. Optical characteristics

Ambient Temperature  
vs. Maximum Forward Current

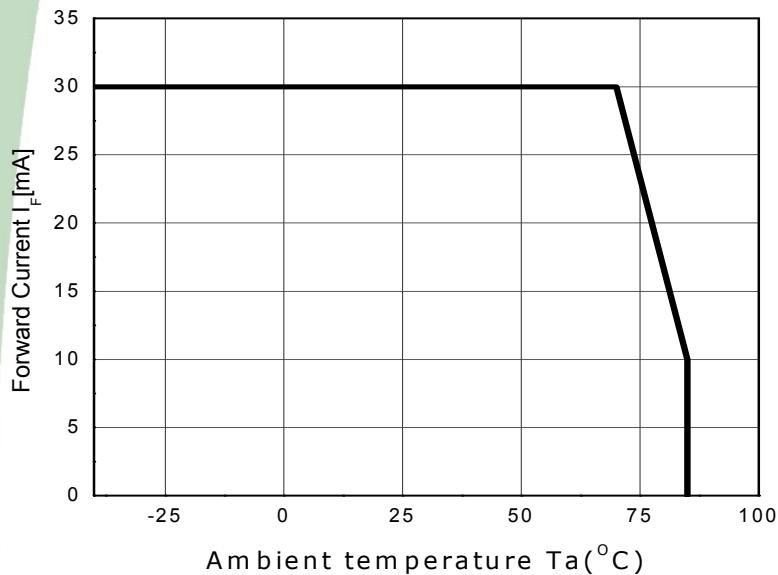

Spectrum

$T_a=25^{\circ}\text{C}$ ,  $I_F=20\text{mA}$

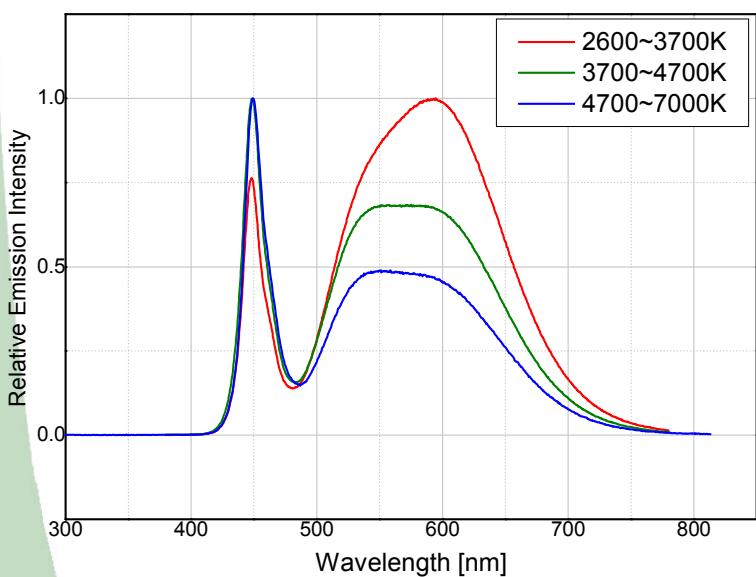



## 5. Reliability Test

Item	Reference	Test Conditions	Duration / Cycle	Number of Damaged
Thermal Shock	EIAJ ED-4701	$T_a = -40^{\circ}\text{C}(30\text{min}) \sim 100^{\circ}\text{C}(30\text{min})$	100 Cycle	0/22
High Temperature Storage	EIAJ ED-4701	$T_a = 100^{\circ}\text{C}$	1000 Hours	0/22
High Temp. High Humidity Storage	EIAJ ED-4701	$T_a = 60^{\circ}\text{C}, \text{RH}=90\%$	1000 Hours	0/22
Low Temperature Storage	EIAJ ED-4701	$T_a = -40^{\circ}\text{C}$	1000 Hours	0/22
Operating Endurance Test	Internal Reference	$T_a = 25^{\circ}\text{C}, I_F = 20\text{mA}$	1000 Hours	0/22
High Temperature High Humidity Life Test	Internal Reference	$T_a = 60^{\circ}\text{C}, \text{RH}=90\%, I_F = 20\text{mA}$	500 Hours	0/22
High Temperature Life Test	Internal Reference	$T_a = 85^{\circ}\text{C}, I_F = 20\text{mA}$	500 Hours	0/22
Low Temperature Life Test	Internal Reference	$T_a = -40^{\circ}\text{C}, I_F = 20\text{mA}$	1000 Hours	0/22
ESD(HBM)	MIL-STD-883D	1KV at $1.5\text{k}\Omega$ ; 100pF	3 Time	0/22
Reflow	$T_{sol}$	$260^{\circ}\text{C} < 10\text{sec. Reflow Soldering}$	3 Time	0/22

### CRITERIA FOR JUDGING THE DAMAGE

Item	Symbol	Condition	Criteria for Judgment	
			MIN	MAX
Forward Voltage	$V_F$	$I_F = 20\text{mA}$	-	$\text{USL}^{[1]} \times 1.2$
Luminous Intensity	$I_V$	$I_F = 20\text{mA}$	$\text{LSL}^{[2]} \times 0.7$	-

Note : [1] USL : Upper Standard Level

[2] LSL : Lower Standard Level


Rev.06

September 2011

[www.seoulsemicon.com](http://www.seoulsemicon.com)

SSC- QP- 7- 07- 24 (Rev.00)

## 6. Color & Binning

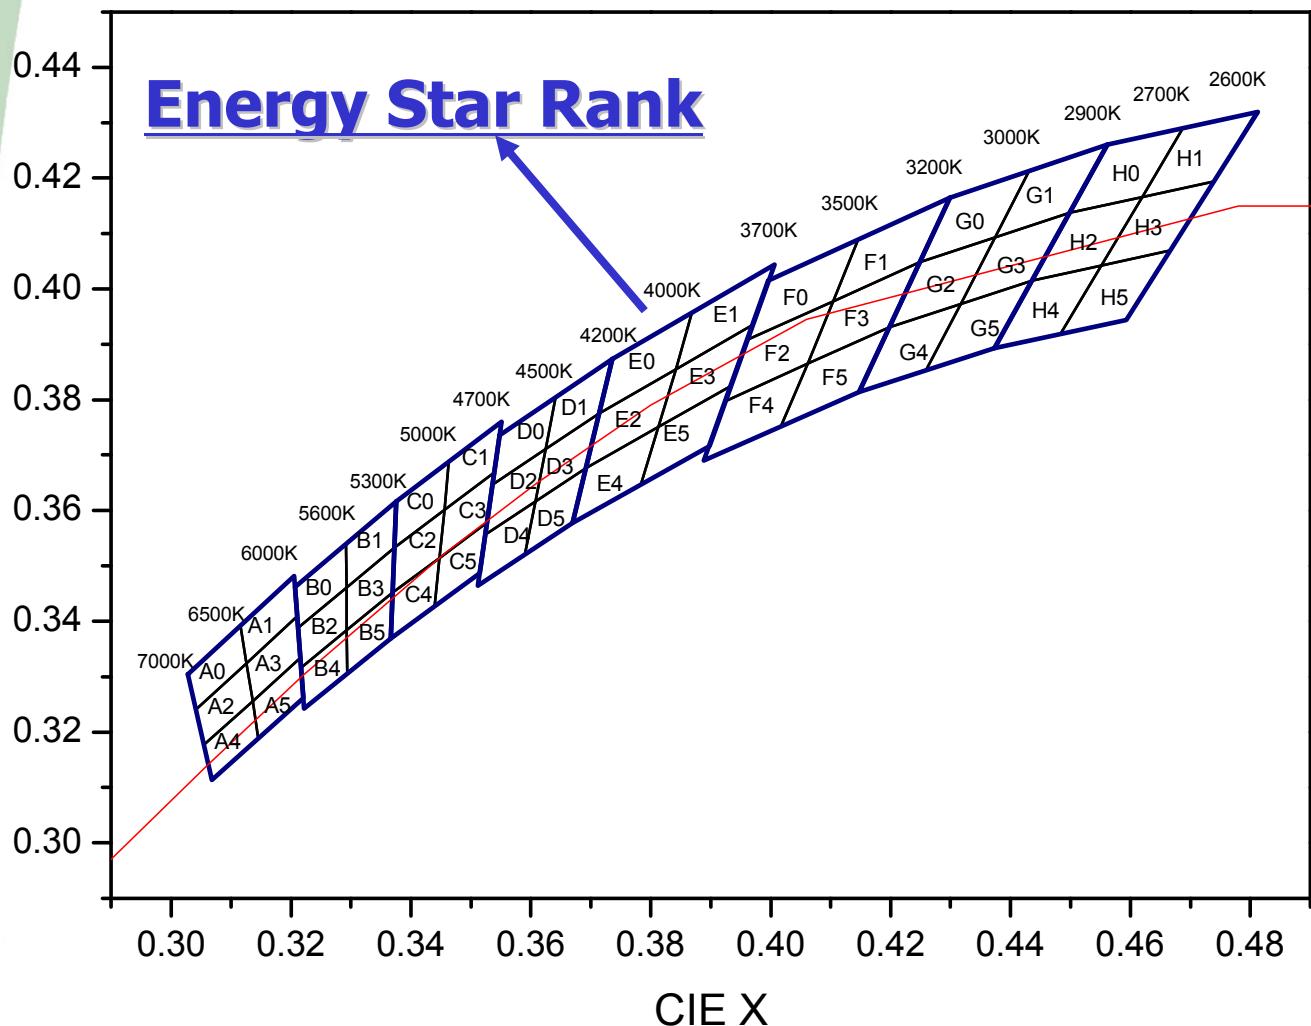



## 6. Color & Binning

### ● COLOR RANK

&lt;IF=20mA, Ta=25°C&gt;

<b>A0</b>		<b>A1</b>		<b>A2</b>	
CIE X	CIE Y	CIE X	CIE Y	CIE X	CIE Y
0.3028	0.3304	0.3115	0.3393	0.3041	0.324
0.3041	0.324	0.3126	0.3324	0.3055	0.3177
0.3126	0.3324	0.321	0.3408	0.3136	0.3256
0.3115	0.3393	0.3205	0.3481	0.3126	0.3324
<b>A3</b>		<b>A4</b>		<b>A5</b>	
CIE X	CIE Y	CIE X	CIE Y	CIE X	CIE Y
0.3126	0.3324	0.3055	0.3177	0.3136	0.3256
0.3136	0.3256	0.3068	0.3113	0.3146	0.3187
0.3216	0.3334	0.3146	0.3187	0.3221	0.3261
0.321	0.3408	0.3136	0.3256	0.3216	0.3334
<b>B0</b>		<b>B1</b>		<b>B2</b>	
CIE X	CIE Y	CIE X	CIE Y	CIE X	CIE Y
0.3207	0.3462	0.3292	0.3539	0.3212	0.3389
0.3212	0.3389	0.3293	0.3461	0.3217	0.3316
0.3293	0.3461	0.3373	0.3534	0.3293	0.3384
0.3292	0.3539	0.3376	0.3616	0.3293	0.3461
<b>B3</b>		<b>B4</b>		<b>B5</b>	
CIE X	CIE Y	CIE X	CIE Y	CIE X	CIE Y
0.3293	0.3461	0.3217	0.3316	0.3293	0.3384
0.3293	0.3384	0.3222	0.3243	0.3294	0.3306
0.3369	0.3451	0.3294	0.3306	0.3366	0.3369
0.3373	0.3534	0.3293	0.3384	0.3369	0.3451

Rev.06

September 2011

[www.seoulsemicon.com](http://www.seoulsemicon.com)

\* Measurement Uncertainty of the Color Coordinates : ± 0.01

SSC- QP- 7- 07- 24 (Rev.00)



## 6. Color & Binning

### ● COLOR RANK

&lt;IF=20mA, Ta=25°C&gt;

<b>C0</b>		<b>C1</b>		<b>C2</b>	
CIE X	CIE Y	CIE X	CIE Y	CIE X	CIE Y
0.3376	0.3616	0.3463	0.3687	0.3373	0.3534
0.3373	0.3534	0.3456	0.3601	0.3369	0.3451
0.3456	0.3601	0.3539	0.3669	0.3448	0.3514
0.3463	0.3687	0.3552	0.376	0.3456	0.3601
<b>C3</b>		<b>C4</b>		<b>C5</b>	
CIE X	CIE Y	CIE X	CIE Y	CIE X	CIE Y
0.3456	0.3601	0.3369	0.3451	0.3448	0.3514
0.3448	0.3514	0.3366	0.3369	0.344	0.3428
0.3526	0.3578	0.344	0.3428	0.3514	0.3487
0.3539	0.3669	0.3448	0.3514	0.3526	0.3578
<b>D0</b>		<b>D1</b>		<b>D2</b>	
CIE X	CIE Y	CIE X	CIE Y	CIE X	CIE Y
0.3548	0.3736	0.3641	0.3804	0.3536	0.3646
0.3536	0.3646	0.3625	0.3711	0.3523	0.3555
0.3625	0.3711	0.3714	0.3775	0.3608	0.3616
0.3641	0.3804	0.3736	0.3874	0.3625	0.3711
<b>D3</b>		<b>D4</b>		<b>D5</b>	
CIE X	CIE Y	CIE X	CIE Y	CIE X	CIE Y
0.3625	0.3711	0.3523	0.3555	0.3608	0.3616
0.3608	0.3616	0.3511	0.3465	0.359	0.3521
0.3692	0.3677	0.359	0.3521	0.367	0.3578
0.3714	0.3775	0.3608	0.3616	0.3692	0.3677

Rev.06

September 2011

[www.seoulsemicon.com](http://www.seoulsemicon.com)

\* Measurement Uncertainty of the Color Coordinates : ± 0.01

SSC- QP- 7- 07- 24 (Rev.00)



## 6. Color & Binning

### ● COLOR RANK

&lt;IF=20mA, Ta=25°C&gt;

<b>E0</b>		<b>E1</b>		<b>E2</b>	
CIE X	CIE Y	CIE X	CIE Y	CIE X	CIE Y
0.3736	0.3874	0.3869	0.3958	0.3714	0.3775
0.3714	0.3775	0.3842	0.3855	0.3692	0.3677
0.3842	0.3855	0.397	0.3935	0.3813	0.3751
0.3869	0.3958	0.4006	0.4044	0.3842	0.3855
<b>E3</b>		<b>E4</b>		<b>E5</b>	
CIE X	CIE Y	CIE X	CIE Y	CIE X	CIE Y
0.3842	0.3855	0.3692	0.3677	0.3813	0.3751
0.3813	0.3751	0.367	0.3578	0.3783	0.3646
0.3934	0.3825	0.3783	0.3646	0.3898	0.3716
0.397	0.3935	0.3813	0.3751	0.3934	0.3825
<b>F0</b>		<b>F1</b>		<b>F2</b>	
CIE X	CIE Y	CIE X	CIE Y	CIE X	CIE Y
0.3996	0.4015	0.4146	0.4089	0.396	0.3907
0.396	0.3907	0.4104	0.3978	0.3925	0.3798
0.4104	0.3978	0.4248	0.4048	0.4062	0.3865
0.4146	0.4089	0.4299	0.4165	0.4104	0.3978
<b>F3</b>		<b>F4</b>		<b>F5</b>	
CIE X	CIE Y	CIE X	CIE Y	CIE X	CIE Y
0.4104	0.3978	0.3925	0.3798	0.4062	0.3865
0.4062	0.3865	0.3889	0.369	0.4017	0.3751
0.4198	0.3931	0.4017	0.3751	0.4147	0.3814
0.4248	0.4048	0.4062	0.3865	0.4198	0.3931



## 6. Color & Binning

### ● COLOR RANK

&lt;IF=20mA, Ta=25°C&gt;

<b>G0</b>		<b>G1</b>		<b>G2</b>	
CIE X	CIE Y	CIE X	CIE Y	CIE X	CIE Y
0.4299	0.4165	0.443	0.4212	0.4248	0.4048
0.4248	0.4048	0.4374	0.4093	0.4198	0.3931
0.4374	0.4093	0.4499	0.4138	0.4317	0.3973
0.443	0.4212	0.4562	0.426	0.4374	0.4093
<b>G3</b>		<b>G4</b>		<b>G5</b>	
CIE X	CIE Y	CIE X	CIE Y	CIE X	CIE Y
0.4374	0.4093	0.4198	0.3931	0.4317	0.3973
0.4317	0.3973	0.4147	0.3814	0.4259	0.3853
0.4436	0.4015	0.4259	0.3853	0.4373	0.3893
0.4499	0.4138	0.4317	0.3973	0.4436	0.4015
<b>H0</b>		<b>H1</b>		<b>H2</b>	
CIE X	CIE Y	CIE X	CIE Y	CIE X	CIE Y
0.4562	0.426	0.4687	0.4289	0.4499	0.4138
0.4499	0.4138	0.462	0.4166	0.4436	0.4015
0.462	0.4166	0.474	0.4194	0.4551	0.4042
0.4687	0.4289	0.481	0.4319	0.462	0.4166
<b>H3</b>		<b>H4</b>		<b>H5</b>	
CIE X	CIE Y	CIE X	CIE Y	CIE X	CIE Y
0.462	0.4166	0.4436	0.4015	0.4551	0.4042
0.4551	0.4042	0.4373	0.3893	0.4483	0.3919
0.4666	0.4069	0.4483	0.3919	0.4593	0.3944
0.474	0.4194	0.4551	0.4042	0.4666	0.4069

## 7. Bin Code Description

Bin Code		
Luminous Intensity	Color Rank	Forward Voltage
J8	G1	Z1



2,600K ~ 7,000K

Luminous Intensity [mcd] *[1]			Flux *[2] [lm]
@ $I_F = 20\text{mA}$			
RANK	Min.	Max.	Typ.
J4	1,400	1,500	3.9
J5	1,500	1,600	4.2
J6	1,600	1,700	4.4
J7	1,700	1,800	4.7
J8	1,800	1,900	5.0
J9	1,900	2,000	5.3
K0	2,000	2,100	5.5
K1	2,100	2,200	5.8
K2	2,200	2,300	6.1
K3	2,300	2,400	6.4
K4	2,400	2,500	6.6

Color Rank @ $I_F = 20\text{mA}$
A~H

Forward Voltage [V] @ $I_F = 20\text{mA}$		
RANK	Min.	Max.
Y	2.9	3.0
Z1	3.0	3.1
Z2	3.1	3.2
Z3	3.2	3.3
A1	3.3	3.4

- Available ranks  
 Not yet available ranks

CCT	IV Rank											
4700~7000 K	J4	J5	J6	J7	J8	J9	K0	K1	K2	K3	K4	
3700~4700 K	J4	J5	J6	J7	J8	J9	K0	K1	K2	K3	K4	
2600~3700 K	J4	J5	J6	J7	J8	J9	K0	K1	K2	K3	K4	

[Note] All measurements were made under the standardized environment of SSC.

In order to ensure availability, single color rank will not be orderable.

[1] Classification criteria : Luminous intensity IV

[2] Please use for only reference.

Rev.06



September 2011

www.seoulsemicon.com


SSC- QP- 7- 07- 24 (Rev.00)



## 8. Outline Dimension

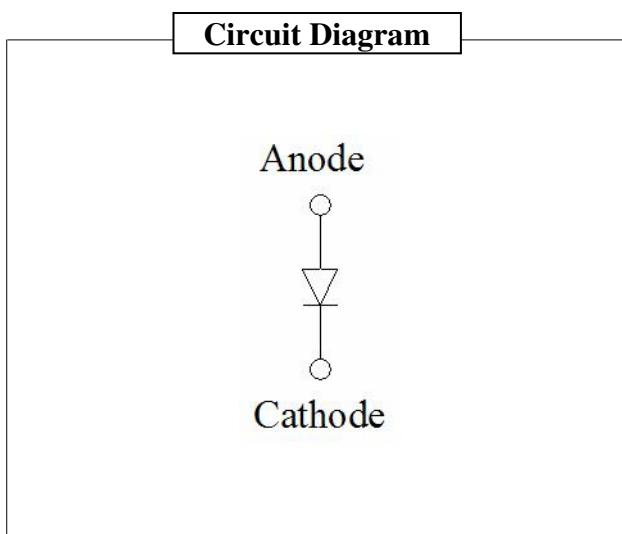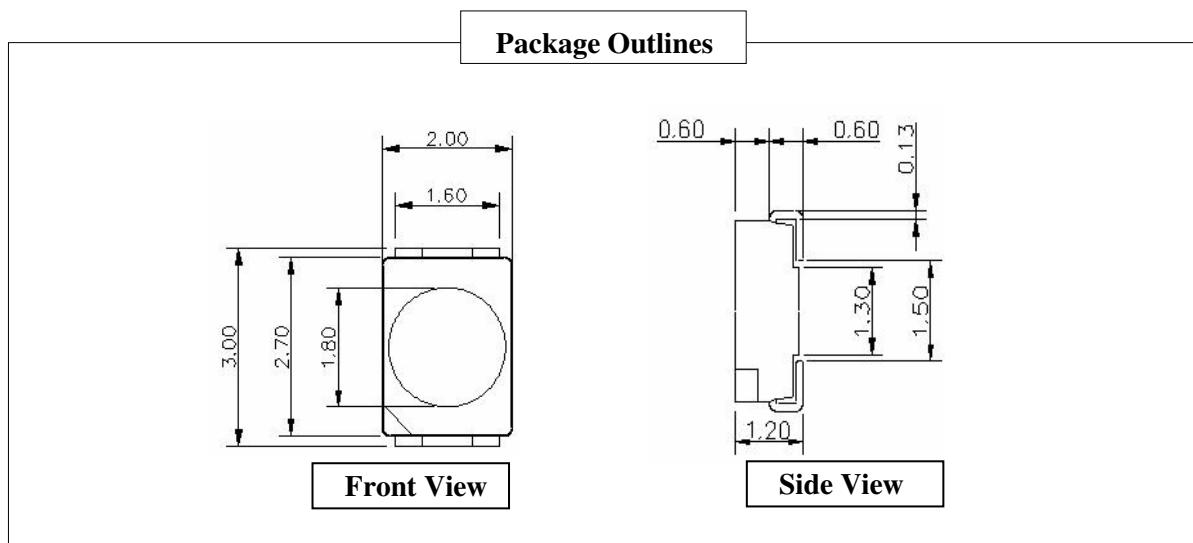

Recommended Solder Pattern



( Tolerance:  $\pm 0.2$ , Unit: mm )


Rev.06

September 2011

[www.seoulsemicon.com](http://www.seoulsemicon.com)

SSC- QP- 7- 07- 24 (Rev.00)

## 9. Reel Structure

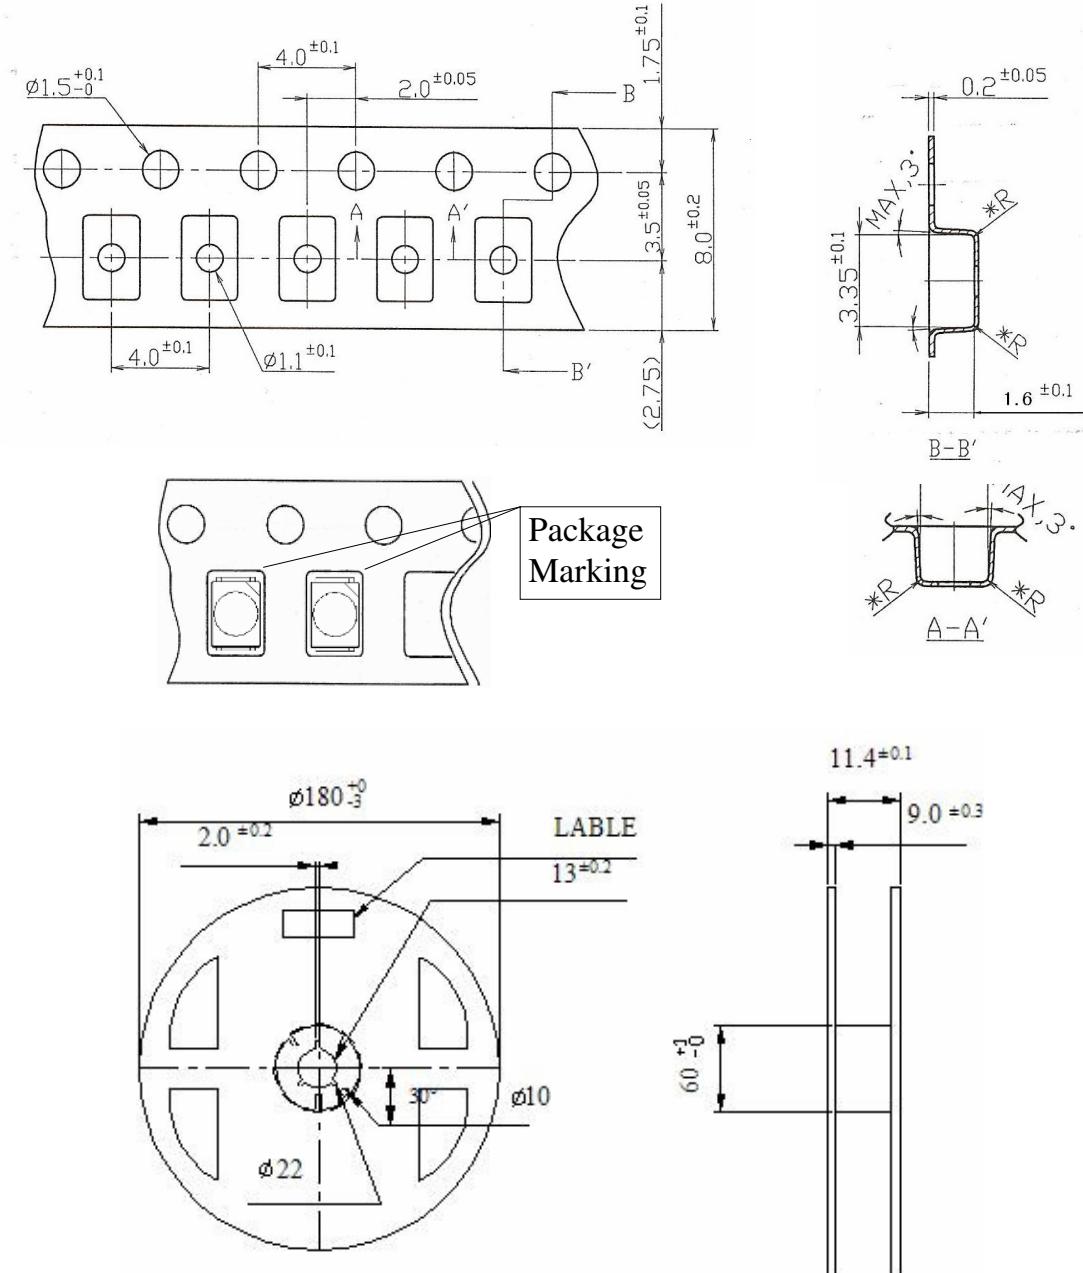

( Tolerance:  $\pm 0.2$ , Unit: mm )

- 1)Quantity : 3,000pcs/Reel
- 2)Cumulative Tolerance : Cumulative Tolerance/10 pitches to be  $\pm 0.2$ mm
- 3)Adhesion Strength of Cover Tape : Adhesion strength to be 0.1-0.7N when the cover tape is turned off from the carrier tape at the angle of 10 to the carrier tape
- 4)Package : P/N, Manufacturing data Code No. and quantity to be indicated on a damp proof Package

**Rev.06**

**September 2011**

**www.seoulsemicon.com**


**SSC- QP- 7- 07- 24 (Rev.00)**



## 10. Packing


### Reel

RANK: XXX  
 QUANTITY : XXXX  
 LOT NUMBER : XXXXXXXXXXXX  
 PART NUMBER : XXXXXX  
 SEOUL SEMICONDUCTOR CO., LTD.

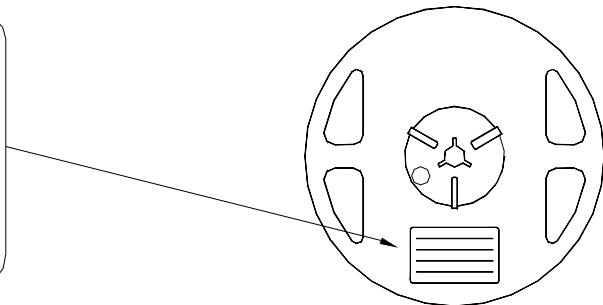

### Aluminum Vinyl Bag

RANK: XXX  
 QUANTITY : XXXX  
 LOT NUMBER : XXXXXXXXXXXX  
 PART NUMBER : XXXXXX  
 SEOUL SEMICONDUCTOR CO., LTD.




### Outer Box Structure

Material : Paper(SW3B(B))

TYPE	SIZE (mm)		
	Ⓐ	Ⓑ	Ⓒ
7inch	245	220	102
	245	220	142

### Ⓐ SIDE


RANK: XXX  
 QUANTITY : XXXX  
 LOT NUMBER : XXXXXXXXXXXX  
 PART NUMBER : XXXXXX  
 SEOUL SEMICONDUCTOR CO., LTD.

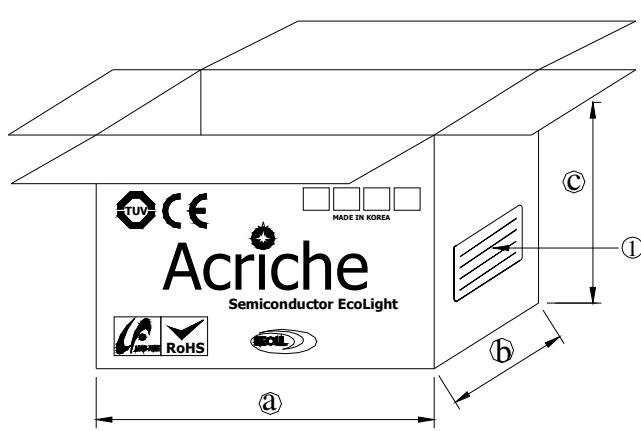

## 11. Soldering


### (1) Lead Solder

Lead Solder	
Pre-heat	120~150 °C
Pre-heat time	120 sec. Max.
Peak-Temperature	240 °C Max.
Soldering time Condition	10 sec. Max.

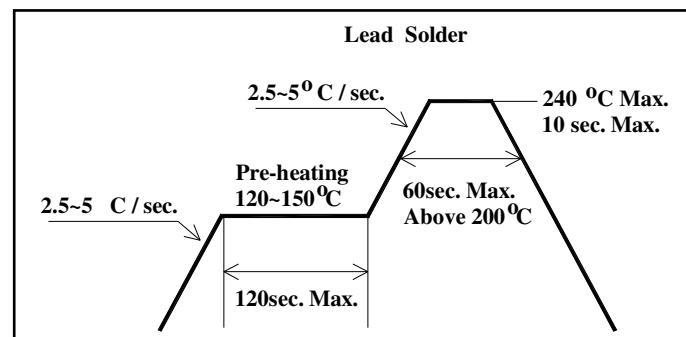

### (2) Lead-Free Solder

Lead Free Solder	
Pre-heat	150~200 °C
Pre-heat time	120 sec. Max.
Peak-Temperature	260 °C Max.
Soldering time Condition	10 sec. Max.

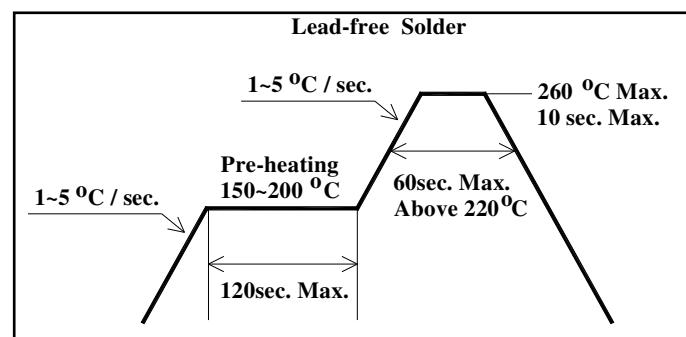

#### (3) Hand Soldering conditions

Do not exceed 4 seconds at maximum 315°C under soldering iron.

#### (4) The encapsulated material of the LEDs is silicone.

Precautions should be taken to avoid the strong pressure on the encapsulated part. So when using the chip mounter, the picking up nozzle that does not affect the silicone resign should be used.

(5) It is recommended that the customer use the nitrogen reflow method.

(6) Repairing should not be done after the LEDs have been soldered.

(7) Reflow soldering should not be done more than two times.

In the case of more than 24 hours passed soldering after first, LEDs will be damaged.

[Note] In case that the soldered products are reused in soldering process, we don't guarantee the products.

September 2011

[www.seoulsemicon.com](http://www.seoulsemicon.com)

SSC- QP- 7- 07- 24 (Rev.00)



## 12. Precaution for use

### 1) Storage

In order to avoid the absorption of moisture, it is recommended to store in a dry box (or a desiccator) with a desiccant. Otherwise, to store them in the following environment is recommended.

Temperature : 5°C ~30°C Humidity : maximum 70%RH

### 2) Attention after open.

LED is correspond to SMD, when LED be soldered dip, interfacial separation may affect the light transmission efficiency, causing the light intensity to drop. Attention in followed;

a. After opened and mounted the soldering shall be quickly.

b. Keeping of a fraction

Temperature : 5 ~ 40°C Humidity : less than 30%

3) In the case of more than 1 week passed after opening or change color of indicator on desiccant, components shall be dried 10-12hr. at 60± 5°C.

4) Silver plating might be tarnished in the environment that contains corrosive gases and materials. Also any product that has tarnished lead might be decreased the solder-ability and optical-electrical properties compare to normal ones.

Please do not expose the product in the corrosive environment during the storage.

5) Any mechanical force or any excess vibration shall not be accepted to apply during cooling process to normal temperature after soldering.

6) Quick cooling shall be avoided.

7) Components shall not be mounted on warped direction of PCB.

8) Anti radioactive ray design is not considered for the products.

9) This device should not be used in any type of fluid such as water, oil, organic solvent etc. When washing is required, IPA should be used.

10) When the LEDs are illuminating, operating current should be decided after considering the ambient maximum temperature.

11) The LEDs must be soldered within seven days after opening the moisture-proof packing.

12) Repack unused products with anti-moisture packing, fold to close any opening and then store in a dry place.

13) The appearance and specifications of the product may be modified for improvement without notice.

Rev.06

September 2011

[www.seoulsemicon.com](http://www.seoulsemicon.com)


SSC- QP- 7- 07- 24 (Rev.00)

## 13. Handling of Silicone Resin LEDs

- 1) During processing, mechanical stress on the surface should be minimized as much as possible. Sharp objects of all types should not be used to pierce the sealing compound.



- 2) In general, LEDs should only be handled from the side. By the way, this also applies to LEDs without a silicone sealant, since the surface can also become scratched.

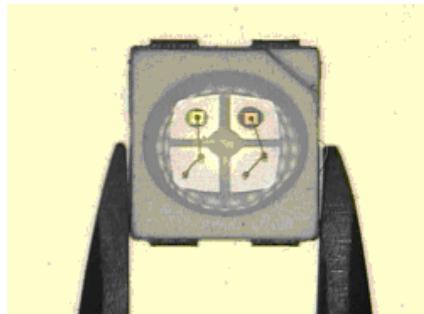

3) When populating boards in SMT production, there are basically no restrictions regarding the form of the pick and place nozzle, except that mechanical pressure on the surface of the resin must be prevented. This is assured by choosing a pick and place nozzle which is larger than the LED's reflector area.

4) Silicone differs from materials conventionally used for the manufacturing of LEDs. These conditions must be considered during the handling of such devices. Compared to standard encapsulants, silicone is generally softer, and the surface is more likely to attract dust.

As mentioned previously, the increased sensitivity to dust requires special care during processing. In cases where a minimal level of dirt and dust particles cannot be guaranteed, a suitable cleaning solution must be applied to the surface after the soldering of components.

5) SSC suggests using isopropyl alcohol for cleaning. In case other solvents are used, it must be assured that these solvents do not dissolve the package or resin. Ultrasonic cleaning is not recommended. Ultrasonic cleaning may cause damage to the LED.

6) Please do not mold this product into another resin (epoxy, urethane, etc) and do not handle this product with acid or sulfur material in sealed space.

**Данный компонент на территории Российской Федерации****Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

**Офис по работе с юридическими лицами:**

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru  
moschip.ru\_4

moschip.ru\_6  
moschip.ru\_9