

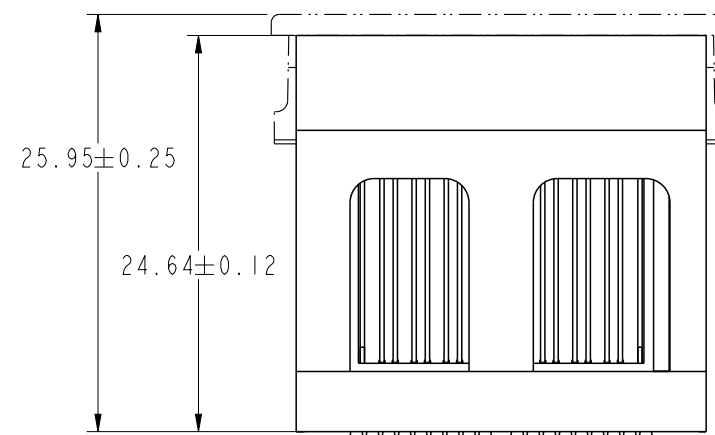


rev	ecn no	dr	date
A	V05-0335	TAB	2005-04-19
B	V06-0239	LP	2006-03-27
C	V06-0558	LP	2006-06-21
D	V08-0329	SM	2008-11-15

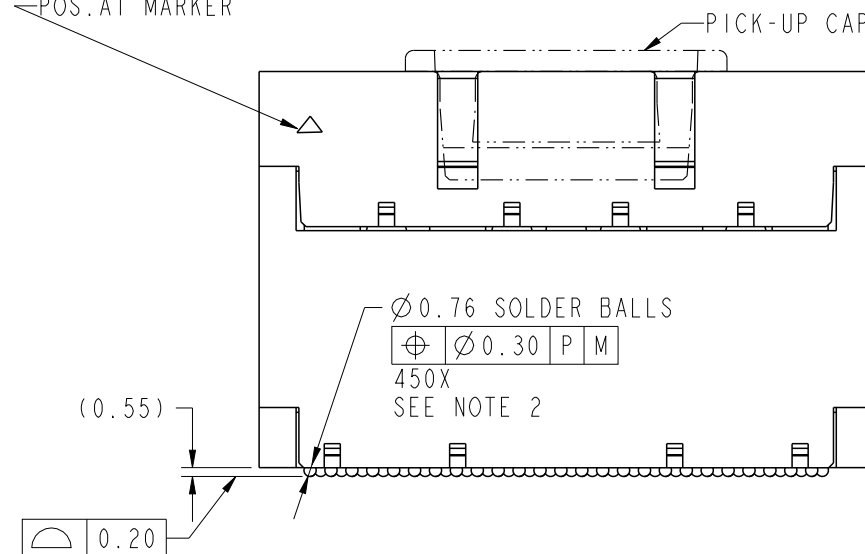

spec ref		*		dr		Bill Lin	2010/02/02	projection				mm		size		A4	scale		1:1				
tolerance std		ASME Y14.5		eng		Nickor Zuo	2011/05/26							ecn no		ELX-DG-003943-1							
-		TOLERANCES UNLESS OTHERWISE SPECIFIED		chr		Alex Cao	2011/06/24							rel level		Released							
				appr		Pei-Ming Zheng	2011/06/27							product family		GIG-Array							
surface		✓		linear		0.X		±0.30				title		GIG-Array		dwg no		10054783		rev		E	
				0.XX		±0.10		25mm PLUG ASSY. 200 SIG. POS.															
				0.XXX		±0.05																	
-				angular		0°		±2°		www.fci.com		cat. no.		*		Product - Customer Drw		sheet 1 of 5					

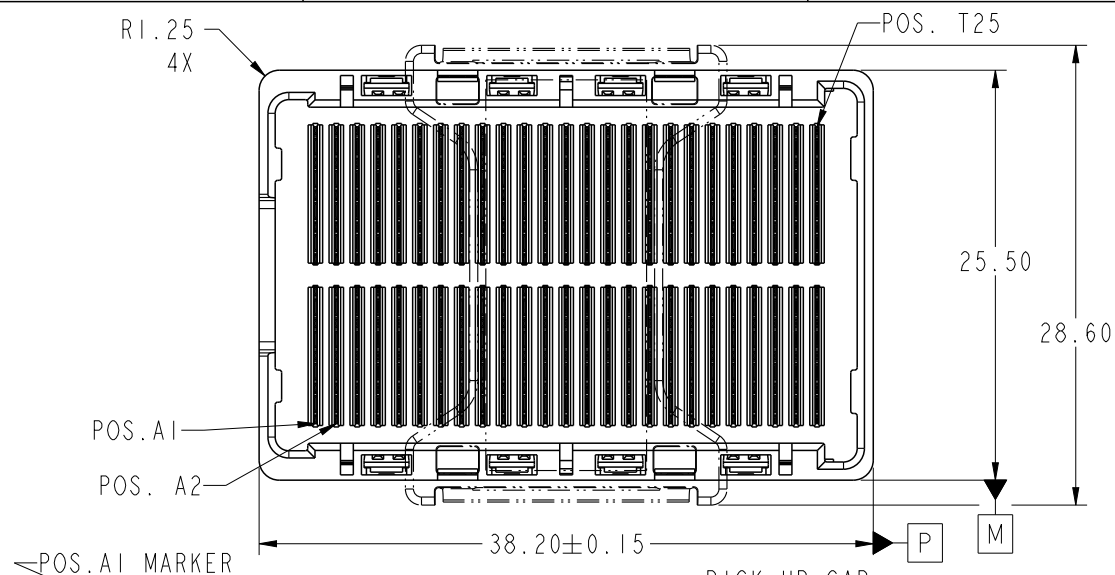


Copyright FCI.

KEY ORIENTATION SILKSCREEN
(OPTIONAL)

SEE NOTES 4 & 5

④ CONTACTS IN
ROWS J & K ARE
TIED TOGETHER
(COMMONED)

$\varnothing 0.60$
 $\varnothing 0.55$
 $\varnothing 0.10$ N
PAD SIZE
450X
SEE NOTE 6

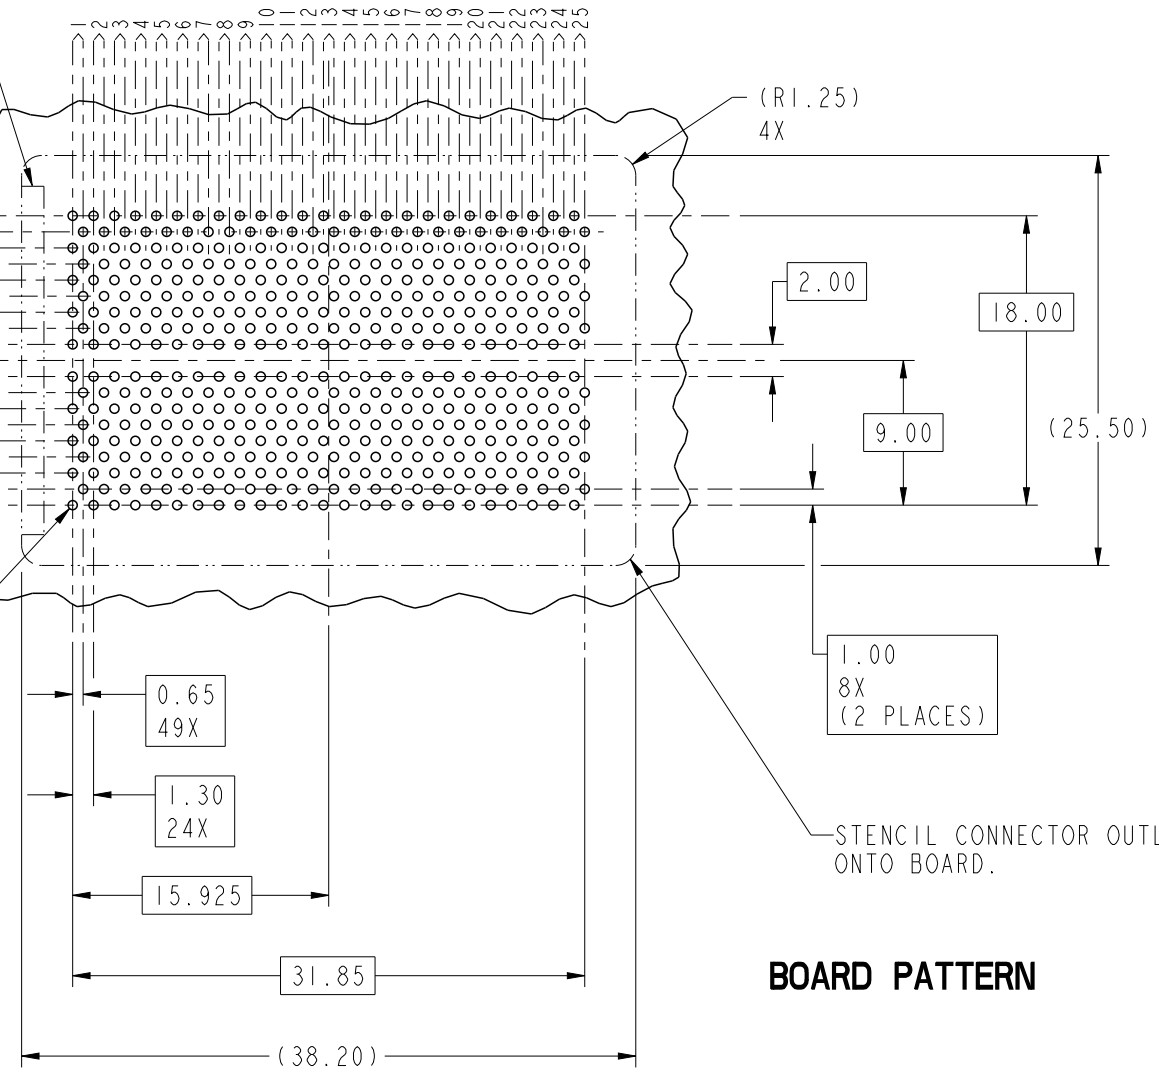


BOARD PATTERN

spec ref *				dr Bill Lin 2010/02/02		projection	mm	size A4	scale 1:1
tolerance std ASME Y14.5 -	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng Nickor Zuo 2011/05/26				ecn no ELX-DG-003943-1	
				chr Alex Cao 2011/06/24					
				appr Pei-Ming Zheng 2011/06/27					
product family GIG-Array						rel level Released			
surface ✓ -	linear	0.X	±0.30		title GIG-Array 25mm PLUG ASSY. 200 SIG. POS.	dwg no 10054783	rev E		
		0.XX	±0.10						
		0.XXX	±0.05						
	angular	0°	±2°					www.fci.com	cat. no. *


PrintE File - REV C - 2009-06-09





Copyright FCI.

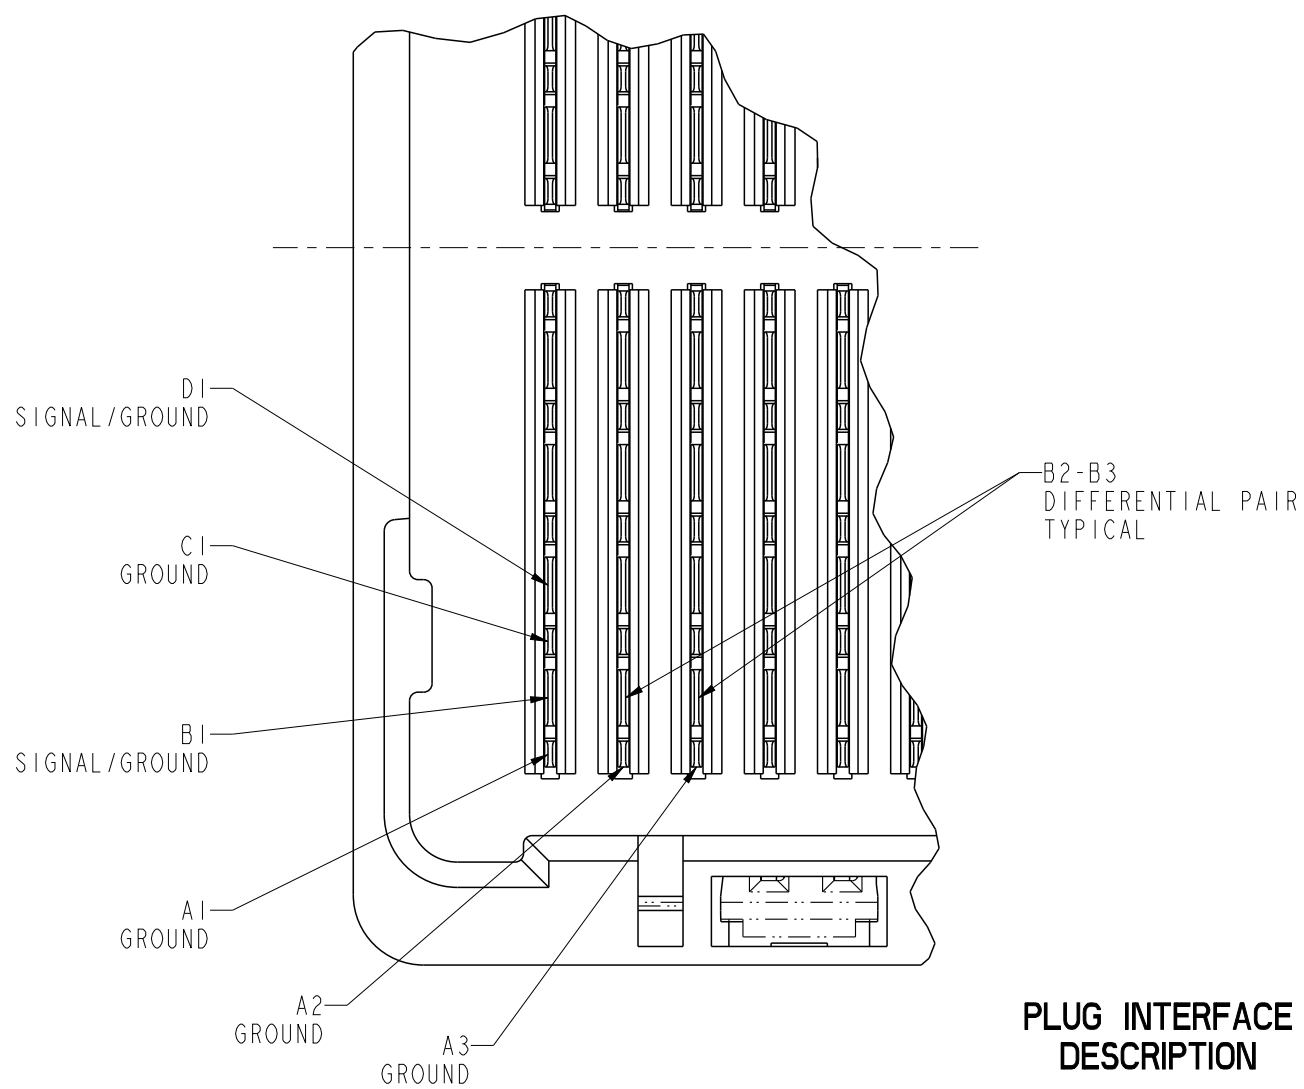

PLUG INTERFACE
DESCRIPTION

spec ref *				dr Bill Lin 2010/02/02		projection 	 mm	size	A4	scale	1:1
tolerance std ASME Y14.5 -	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng Nickor Zuo 2011/05/26				ecn no ELX-DG-003943-1			
				chr Alex Cao 2011/06/24				rel level Released			
				appr Pei-Ming Zheng 2011/06/27							
surface  -		linear	0.X	±0.30		title GIG-Array 25mm PLUG ASSY. 200 SIG. POS.		dwg no 10054783	rev E		
			0.XX	±0.10							
			0.XXX	±0.05							
			angular	0°	±2°	www.fci.com	cat. no. *		Product - Customer Drw		


FLAT AREA
FOR
PICK-UP CAP

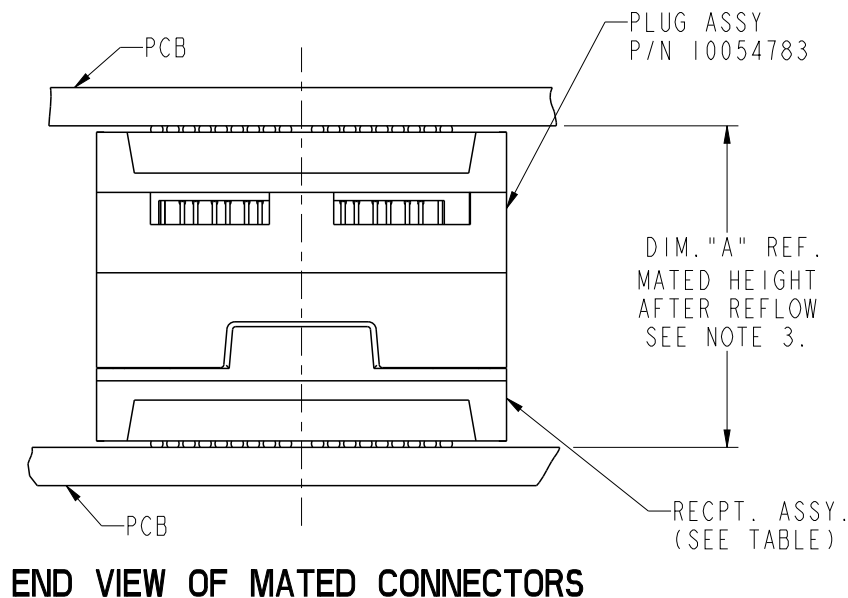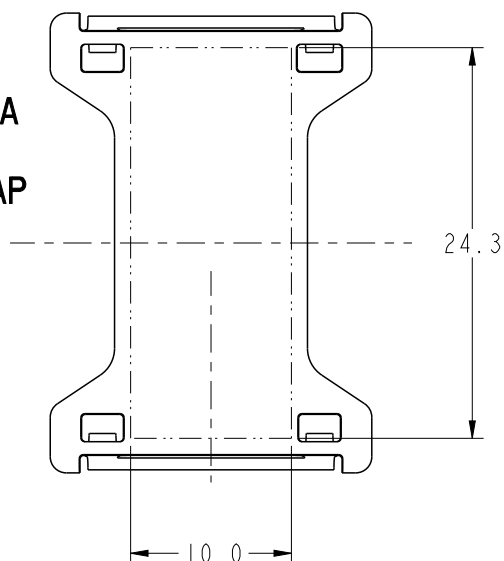

END VIEW OF MATED CONNECTORS

DIM. "A"	RECPT. ASSY. P/N
30	55740
35	10026010
40	55741


NOT TOOLED

spec ref		*		dr		Bill Lin	2010/02/02	projection				mm		size		A4	scale		1:1			
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		Nickor Zuo	2011/05/26							ecn no		ELX-DG-003943-1						
ASME Y14.5				chr		Alex Cao	2011/06/24							rel level		Released						
-				appr		Pei-Ming Zheng	2011/06/27							product family		GIG-Array						
surface				linear		0.X		±0.30				title		GIG-Array		dwg no		10054783		rev		E
				0.XX		±0.10																
				0.XXX		±0.05																
-		angular		0°		±2°		www.fci.com		cat. no.		*		Product - Customer Drw		sheet 4 of 5						

PRODUCT NUMBER	SOLDER BALL COMPOSITION	CONTACT PLATING PERFORMANCE LEVEL
10054783-001	STANDARD (EUTECTIC)	PERFORMANCE-BASED PLATING, QUALIFIED TO MEET THE REQUIREMENTS OF FCI PRODUCT SPECIFICATION GS-12-192, INCLUDING TELCORDIA CENTRAL OFFICE
10054783-001LF	LEADFREE	

NOTES:

- ① MAT'L:
HOUSING: LCP
CONTACT: COPPER ALLOY
PLATING (CONTACT): Au OVER Ni.
UL RATING: 94 V-0
SOLDER BALL: (SEE TABLE) EUTECTIC SnPb OR LEADFREE 95.5 Sn/4Ag/0.5Cu
- ② SOLDER BALLS WILL NOT BE PERFECT SPHERICAL SHAPE DUE TO REFLOW ATTACHMENT.
- ③ MATED HEIGHT EFFECTED BY CUSTOMERS' PCB PAD SIZE, PLATING, SOLDER REFLOW PROFILE & SOLDER PASTE.
- ④ CONTACTS IN ROWS A,C,E,G,J,K,M,P,R AND T ARE SINGLE BEAM CONTACTS, TYPICALLY USED AS GROUND PINS. (NOTE: CONTACTS IN ROWS J & K ARE TIED TOGETHER [COMMONED])
- ⑤ CONTACTS IN ROWS B,D,F,H,L,N,Q AND S ARE DUAL BEAM CONTACTS, TYPICALLY USED AS SIGNAL PINS.
- ⑥ SPECIFIED POSITIONAL TOLERANCE DEFINES PAD TO PAD LOCATION WITHIN LAND PATTERN. POSITIONAL TOLERANCE OF LAND PATTERN TO FUDICIAL MARKS OR PCB DATUMS SHALL BE DEFINED BY CUSTOMER. FOR RECOMMENDED PRODUCT APPLICATION AND PCB DESIGN DETAILS, SEE DOC. NO. GS-20-016.
- ⑦ FOR PROPER APPLICATION FOLLOW FCI APPLICATION SPECIFICATION GS-20-033 LEADFREE SOLDER BALLS WILL NOT SOLDER PROPERLY IN A LEADED SOLDER PROCESS DUE TO A HIGHER REFLOW TEMPERATURE, LEADFREE PRODUCT IS THEREFORE NOT BACKWARDS COMPATIBLE WITH LEADED OR SOME SOLDERING APPLICATIONS, REFERENCE FCI APPLICATION SPECIFICATION.
- ⑧ THIS PRODUCT MEETS THE EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008 PRODUCT MEETING THIS DIRECTIVE IS IDENTIFIED IN HTE LOT CODE NUMBER MARKED ON EACH PART BY HAVING AN "X" IN THE SEVENTH CHARACTER POSITION.

spec ref		*		dr		Bill Lin	2010/02/02	projection				size		A4	scale		1:1				
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		Nickor Zuo	2011/05/26					ecn no		ELX-DG-003943-1							
ASME Y14.5				chr		Alex Cao	2011/06/24					rel level		Released							
-				appr		Pei-Ming Zheng	2011/06/27					product family		GIG-Array							
surface				linear		0.X		±0.30				title		GIG-Array		dwg no		10054783		rev	
				0.XX		±0.10		25mm PLUG ASSY. 200 SIG. POS.						E							
				0.XXX		±0.05															
-		angular		0°		±2°		www.fci.com		cat. no.		*		Product - Customer Drw		sheet 5 of 5					

PrintE File - REV C - 2009-06-09

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9