


FLORENTINA-HLD-RS

~10° real spot beam

TECHNICAL SPECIFICATIONS:

Dimensions	285.6 x 19.5 mm
Height	9.5 mm
Fastening	clips
ROHS compliant	yes 



MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
TINA2-RS	Single lens	PMMA		
FLORENTINA-HLD	Holder	PC		


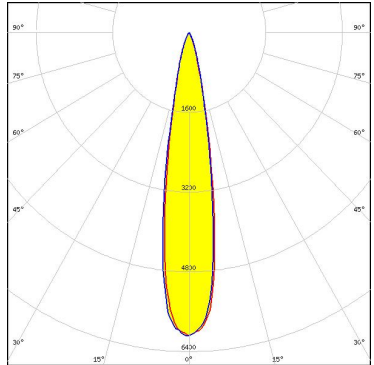

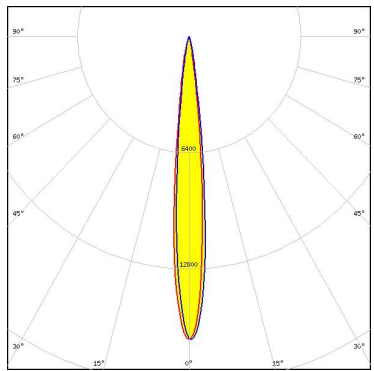

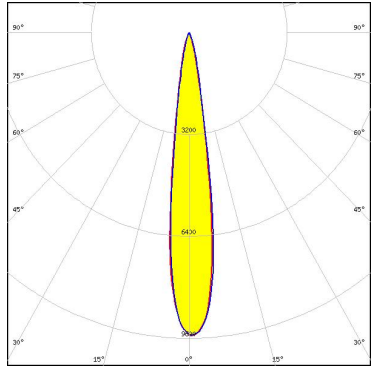

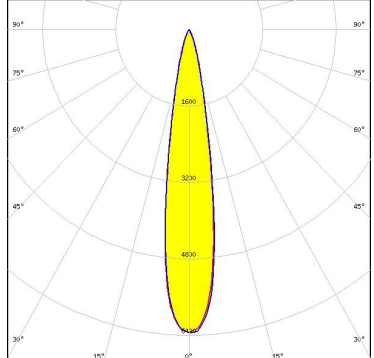


ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
CP14866_FLORENTINA-HLD-RS	Single lens	160	32	16	5.2
» Box size: 398 x 298 x 140 mm					

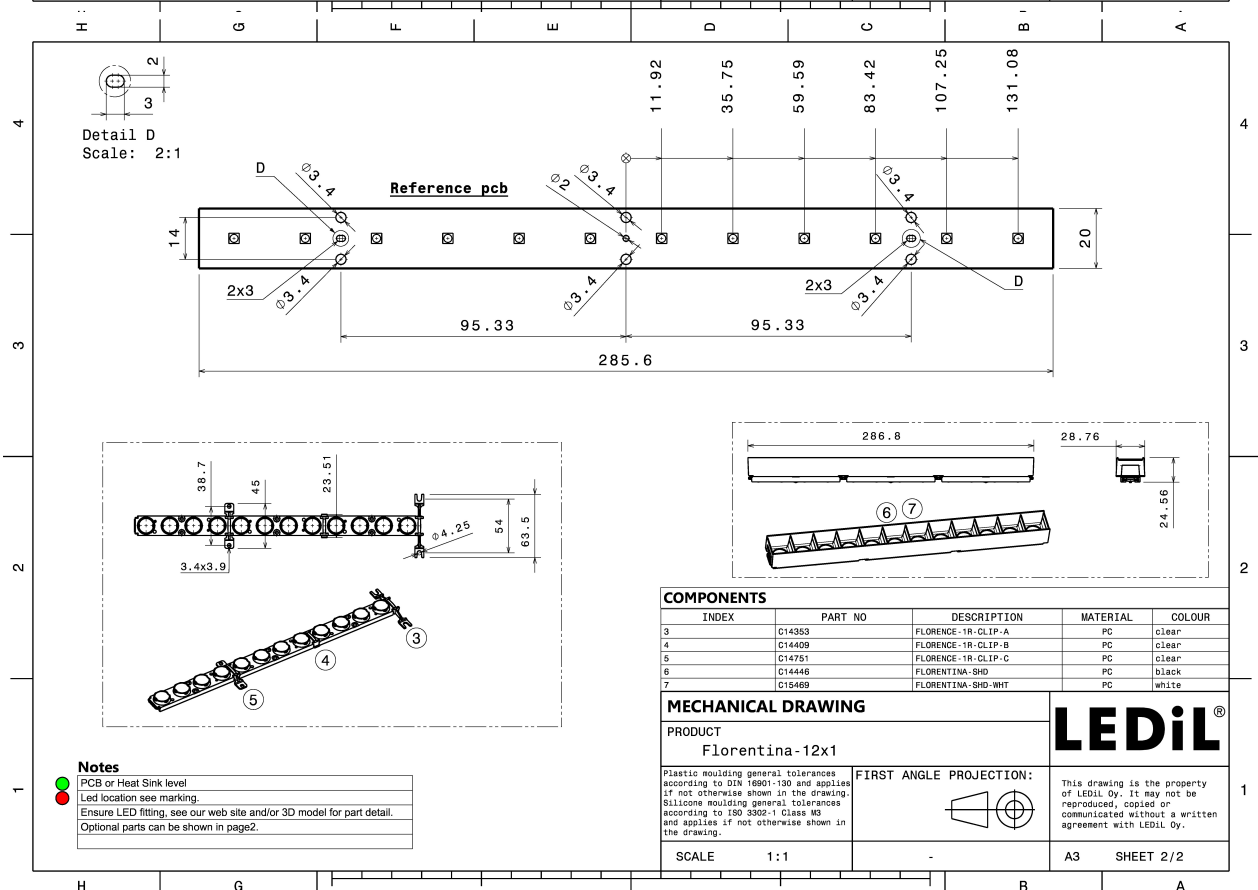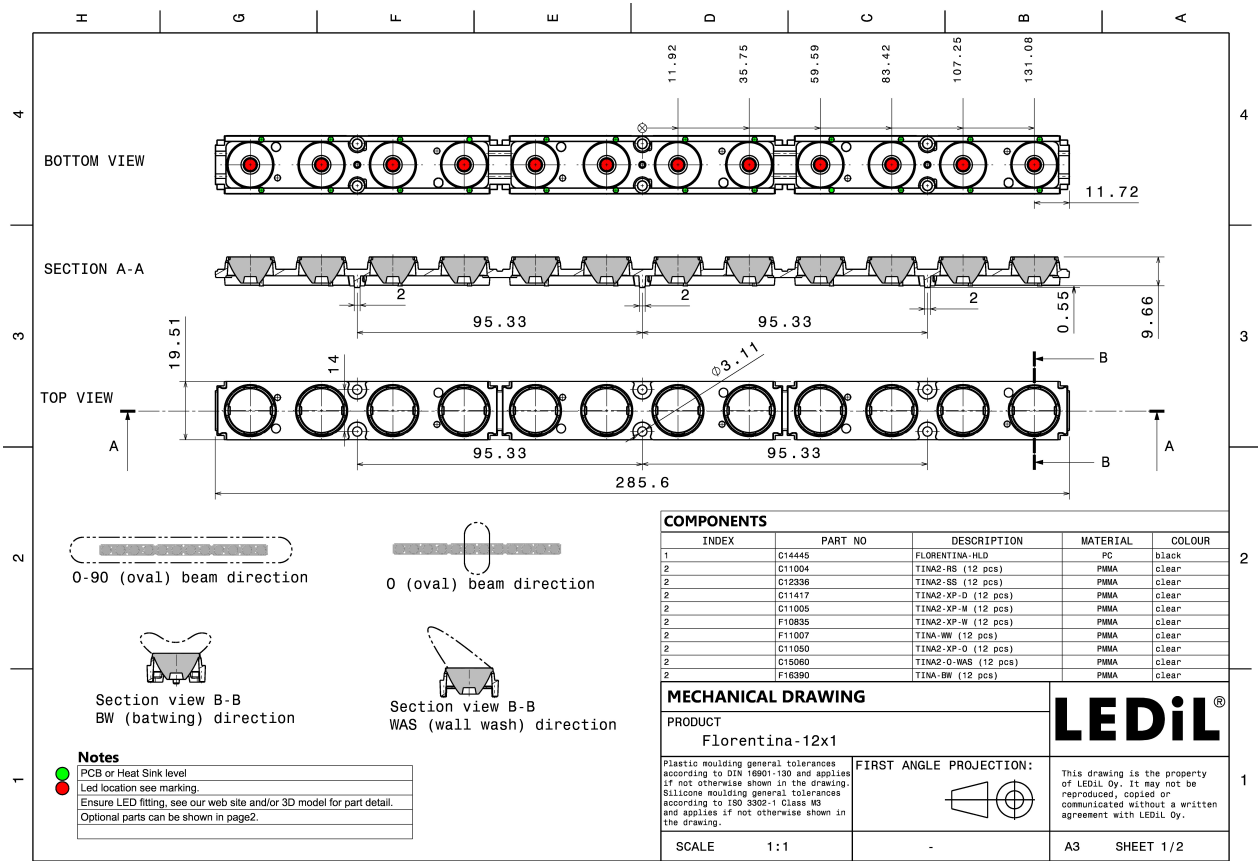



PHOTOMETRIC DATA (MEASURED):

<p>COMET ELECTRONICS</p> <p>LED QUICK FLUX LED FL-XG 1x12 xxx</p> <p>FWHM 18.0°</p> <p>Efficiency 84 %</p> <p>Peak intensity 6.100 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: C14446_FLORENTINA-SHD</p>		
<p>CREE</p> <p>LED XP-E2</p> <p>FWHM 11.0°</p> <p>Efficiency 84 %</p> <p>Peak intensity 16.740 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: C14446_FLORENTINA-SHD</p>		
<p>CREE</p> <p>LED XP-G2</p> <p>FWHM 15.0°</p> <p>Efficiency 86 %</p> <p>Peak intensity 9.500 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: C14446_FLORENTINA-SHD</p>		
<p>CREE</p> <p>LED XP-G3</p> <p>FWHM 18.0°</p> <p>Efficiency 84 %</p> <p>Peak intensity 6.400 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: C14446_FLORENTINA-SHD</p>		

PHOTOMETRIC DATA (MEASURED):



LG Innotek

LED H35C1 (LEMWA33)
 FWHM 15.0°
 Efficiency 84 %
 Peak intensity 8.600 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C14446_FLORENTINA-SHD

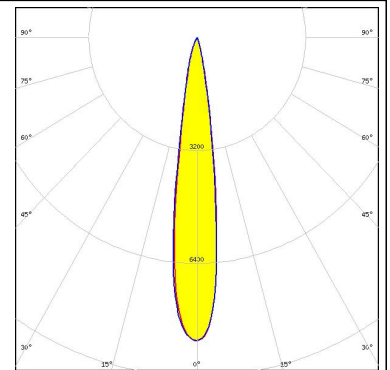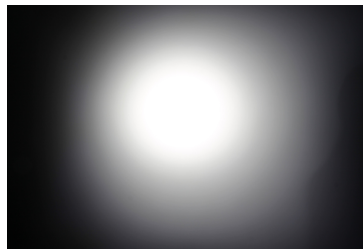



LG Innotek

LED H35C1 (LEMWA33)
 FWHM 15.0°
 Efficiency 84 %
 Peak intensity 8.600 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C14446_FLORENTINA-SHD

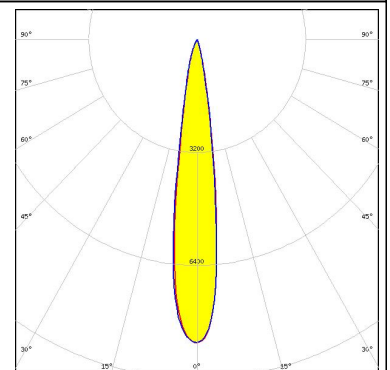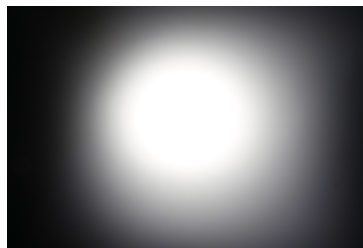



LUMILEDS

LED LUXEON Rebel ES
 FWHM 16.0°
 Efficiency 82 %
 Peak intensity 7.800 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C14446_FLORENTINA-SHD

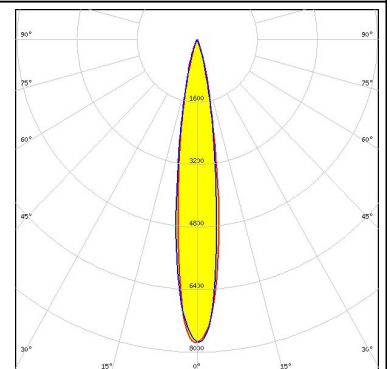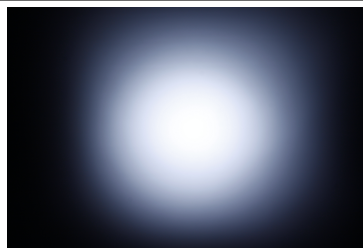

LUMILEDS



LED LUXEON Rebel Plus
 FWHM 14.0°
 Efficiency 82 %
 Peak intensity 11.200 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C14446_FLORENTINA-SHD

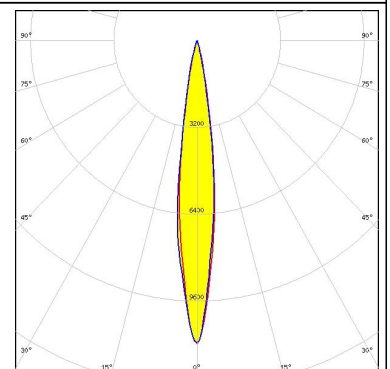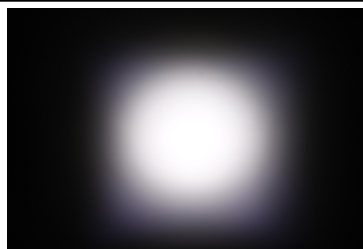

PHOTOMETRIC DATA (MEASURED):


LUMILEDS

LED LUXEON TX
 FWHM 15.0°
 Efficiency 83 %
 Peak intensity 8.800 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C14446_FLORENTINA-SHD

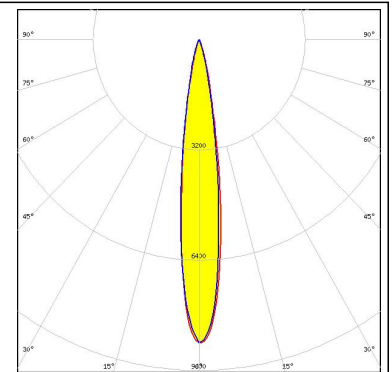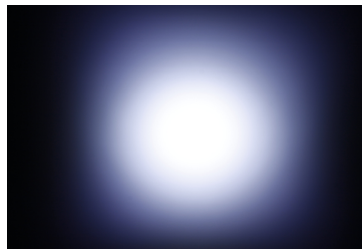


LUMILEDS

LED LUXEON Z ES
 FWHM 13.0°
 Efficiency 84 %
 Peak intensity 14.300 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C14446_FLORENTINA-SHD

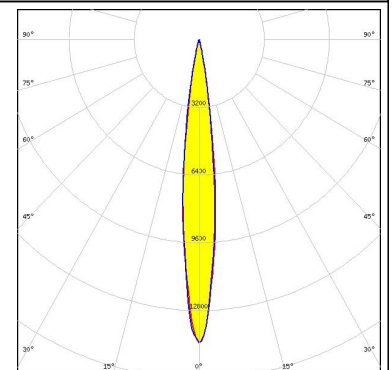



NICHIA

LED NCSxx19B
 FWHM 13.0°
 Efficiency 80 %
 Peak intensity 10.300 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C14446_FLORENTINA-SHD

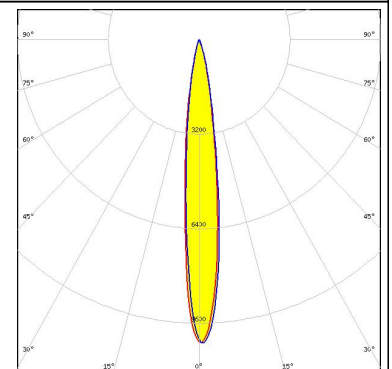

NICHIA



LED NVSxx19B/NVSxx19C
 FWHM 16.0°
 Efficiency 79 %
 Peak intensity 6.700 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C14446_FLORENTINA-SHD

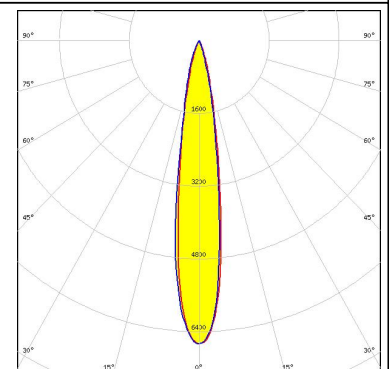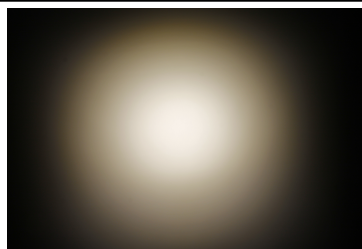

PHOTOMETRIC DATA (MEASURED):



OSRAM
Opto Semiconductors

LED OSLON Square EC
FWHM 15.0°
Efficiency 81 %
Peak intensity 9.000 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C14446_FLORENTINA-SHD

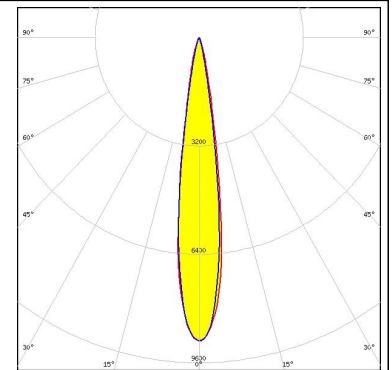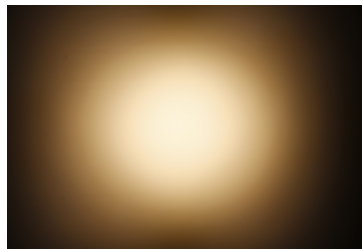



OSRAM
Opto Semiconductors

LED OSLON Square EC
FWHM 15.0°
Efficiency 81 %
Peak intensity 8.950 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C14446_FLORENTINA-SHD

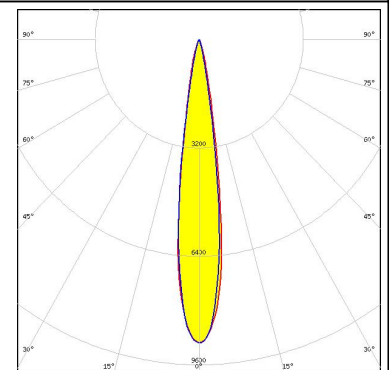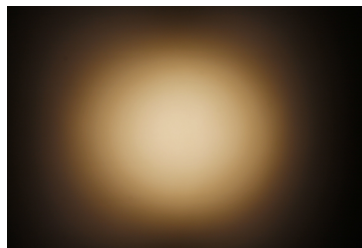


OSRAM
Opto Semiconductors

LED OSLON SSL 150
FWHM 11.0°
Efficiency 84 %
Peak intensity 15.600 cd/lm
LEDs/each optic 1
Light colour White
Required components:

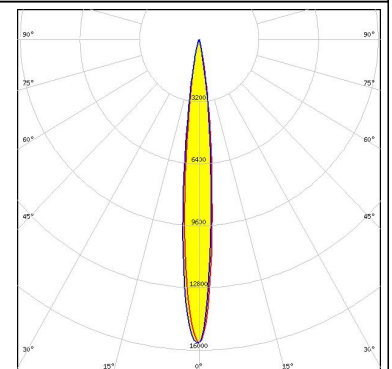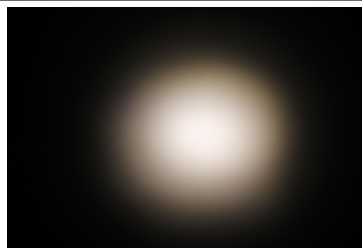

OSRAM
Opto Semiconductors

LED OSLON SSL 150
FWHM 11.0°
Efficiency 82 %
Peak intensity 17.600 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C14446_FLORENTINA-SHD

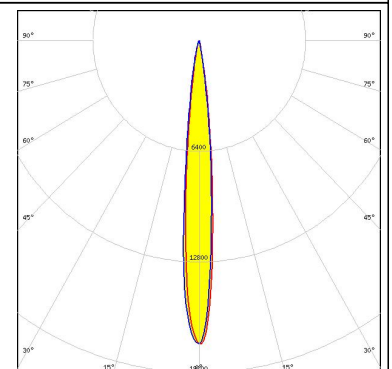


PHOTOMETRIC DATA (MEASURED):

OSRAM



Opto Semiconductors

LED OSLON SSL 80
 FWHM 15.0°
 Efficiency 82 %
 Peak intensity 9.760 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C14446_FLORENTINA-SHD

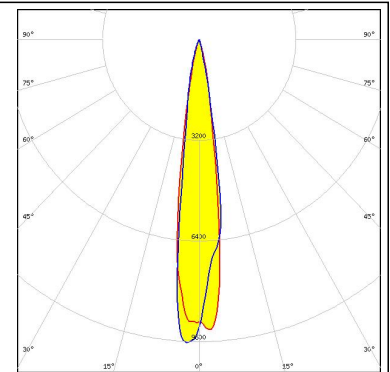

SAMSUNG



LED LH351B
 FWHM 18.0°
 Efficiency 84 %
 Peak intensity 6.800 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C14446_FLORENTINA-SHD

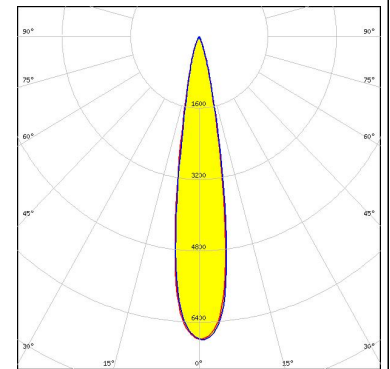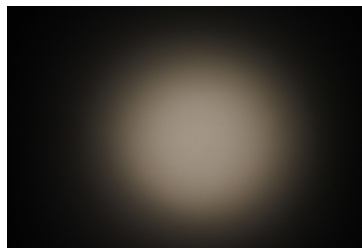

TOSHIBA

Leading Innovation >>>


LED TL1L4
 FWHM 16.0°
 Efficiency 82 %
 Peak intensity 7.700 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C14446_FLORENTINA-SHD

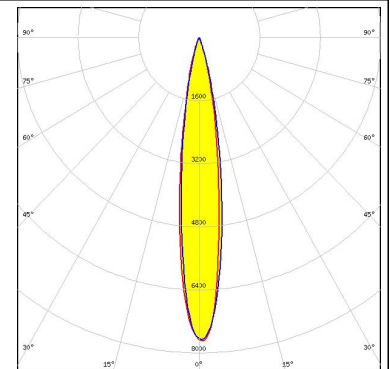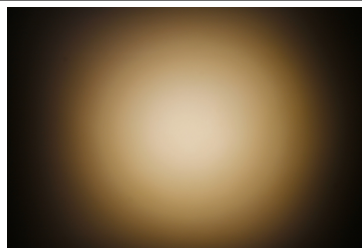


PHOTOMETRIC DATA (SIMULATED):




LED NCSxE17A
FWHM 11.0°
Efficiency 88 %
Peak intensity 22.360 cd/lm
LEDs/each optic 1
Light colour White
Required components:
 C14446_FLORENTINA-SHD

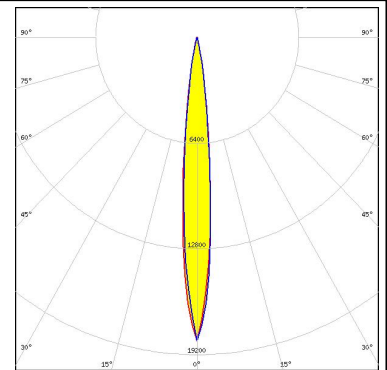


LED NVSU119C
FWHM 16.0°
Efficiency 92 %
Peak intensity cd/lm
LEDs/each optic 1
Light colour UV
Required components:

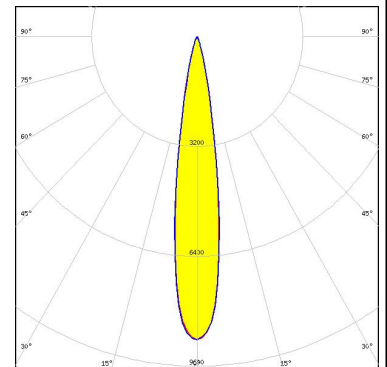


LED NVSxE21A
FWHM 13.0°
Efficiency 88 %
Peak intensity 14.700 cd/lm
LEDs/each optic 1
Light colour White
Required components:
 C14446_FLORENTINA-SHD

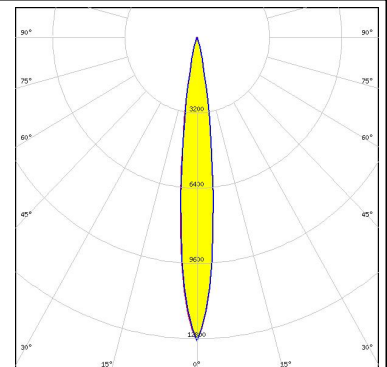

LED NWSx229A
FWHM 24.0°
Efficiency 86 %
Peak intensity 3.950 cd/lm
LEDs/each optic 1
Light colour White
Required components:
 C14446_FLORENTINA-SHD

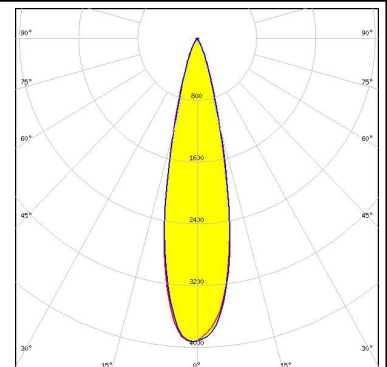

PHOTOMETRIC DATA (SIMULATED):

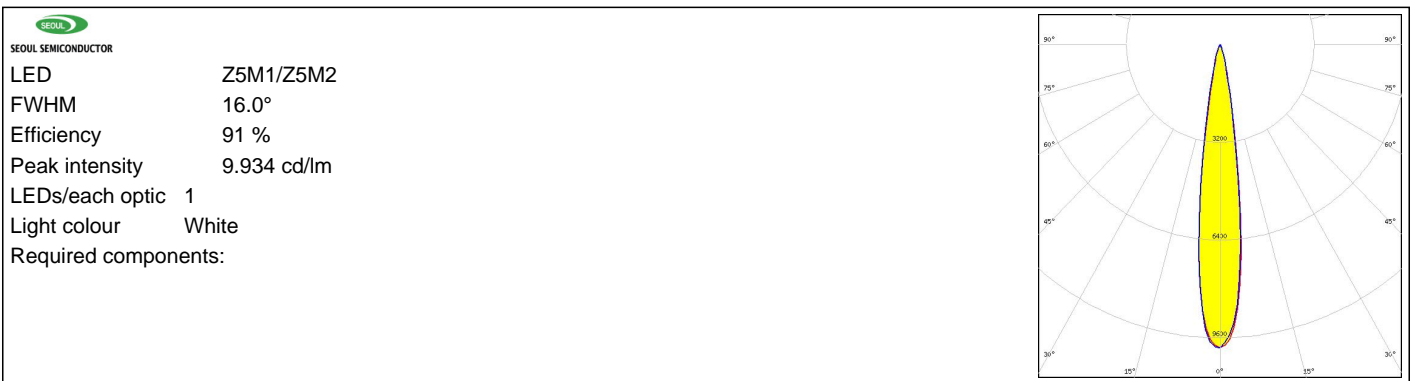

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9