# Shielded Power Inductors – XFL4030




- High current – up to 5.2 A
- Very low DCR – as low as 3.6 mOhms
- AEC-Q200 Grade 1 qualified (–40°C to +125°C ambient)

**Core material** Composite

**Environmental** RoHS compliant, halogen free

**Terminations** Tin-silver over copper. Other terminations available at additional cost.

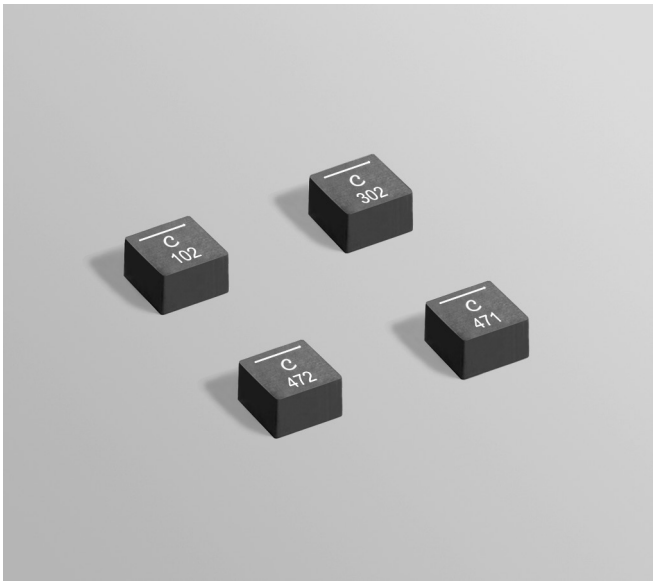**Weight** 0.25 – 0.27 g

**Operating voltage** 0 – 20 V

**Ambient temperature** –40°C to +125°C with (40°C rise) Irms current.

**Maximum part temperature** +165°C (ambient + temp rise).

**Storage temperature** Component: –55°C to +165°C.
Tape and reel packaging: –55°C to +80°C

**Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Failures in Time (FIT) / Mean Time Between Failures (MTBF)** 38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

**PCB washing** Tested with pure water or alcohol only. For other solvents, see Doc787_PCB_Washing.pdf

| Part number[1] | Inductance[2] ±20% (µH) | DCR (mOhms)[3] typ | DCR (mOhms)[3] max | SRF typ[4] (MHz) | Isat (A)[5] 10% drop | Isat (A)[5] 20% drop | Isat (A)[5] 30% drop | Irms (A)[6] 20°C rise | Irms (A)[6] 40°C rise |
|---|---|---|---|---|---|---|---|---|---|
| XFL4030-471ME_ | 0.47 | 3.6 | 4.4 | 110 | 4.5 | 4.9 | 5.2 | 14.0 | 18.0 |
| XFL4030-102ME_ | 1.0 | 5.5 | 6.6 | 67 | 3.6 | 3.9 | 4.1 | 11.0 | 14.5 |
| XFL4030-202ME_ | 2.0 | 9.5 | 11.5 | 46 | 2.5 | 2.8 | 3.0 | 7.80 | 11.8 |
| XFL4030-302ME_ | 3.0 | 17.0 | 20.5 | 39 | 1.8 | 2.1 | 2.2 | 6.10 | 8.00 |
| XFL4030-472ME_ | 4.7 | 25.0 | 30.0 | 34 | 1.7 | 2.0 | 2.1 | 5.70 | 7.50 |

1. When ordering, please specify **packaging** code:

**XFL4030-472MEC**

**Packaging: C** = 7″ machine-ready reel. EIA-481 embossed plastic tape (500 parts per full reel). Quantities less than full reel available: in tape (not machine ready) or with leader and trailer ($25 charge).
**B** = Less than full reel. In an effort to simplify our part numbering system, Coilcraft is eliminating the need for multiple packaging codes. When ordering, simply change the last letter of your part number from B to C.
**D** = 13″ machine-ready reel. EIA-481 embossed plastic tape. Factory order only, not stocked (2000 parts per full reel).

2. Inductance tested at 1 MHz, 0.1 Vrms, 0 Adc.
3. DCR measured on a micro-ohmmeter.
4. SRF measured using Agilent/HP 4395A or equivalent.
5. DC current at 25°C that causes the specified inductance drop from its value without current.
6. Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.
7. Electrical specifications at 25°C.

Refer to Doc 362 “Soldering Surface Mount Components” before soldering.

## Irms Testing

Irms testing was performed on 0.75 inch wide × 0.25 inch thick copper traces in still air.

Temperature rise is highly dependent on many factors including pcb land pattern, trace size, and proximity to other components. Therefore temperature rise should be verified in application conditions.

Coilcraft
www.coilcraft.com

**US** +1-847-639-6400 sales@coilcraft.com
**UK** +44-1236-730595 sales@coilcraft-europe.com
**Taiwan** +886-2-2264 3646 sales@coilcraft.com.tw
**China** +86-21-6218 8074 sales@coilcraft.com.cn
**Singapore** + 65-6484 8412 sales@coilcraft.com.sg

Document 1048-1 Revised 12/23/19

© Coilcraft Inc. 2019
This product may not be used in medical or high risk applications without prior Coilcraft approval.
Specification subject to change without notice.
Please check web site for latest information.

# Shielded Power Inductors – XFL4030

## Typical L vs Current













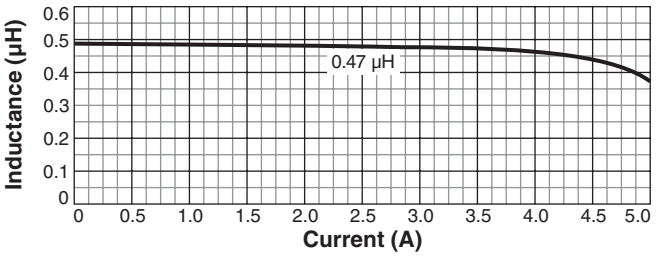


## Typical L vs Frequency

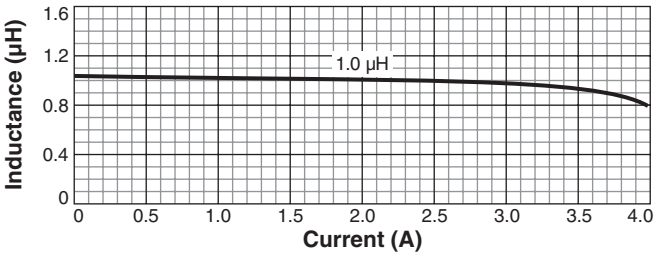


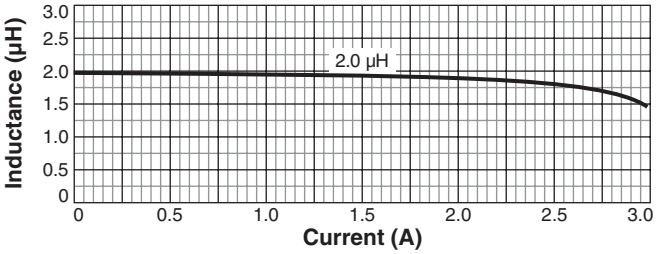


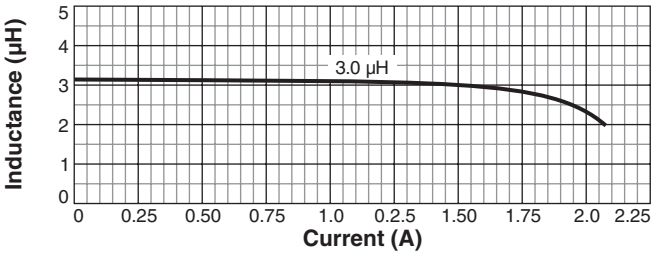**Note**: Parts manufactured prior to 2011 may not have orientation indicator.

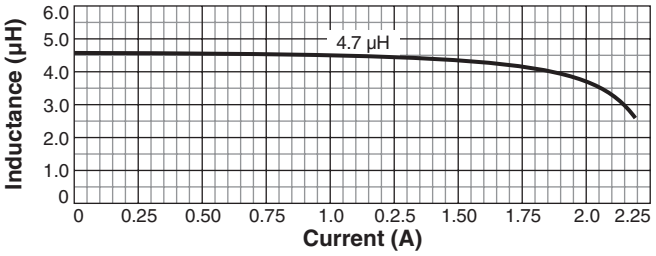


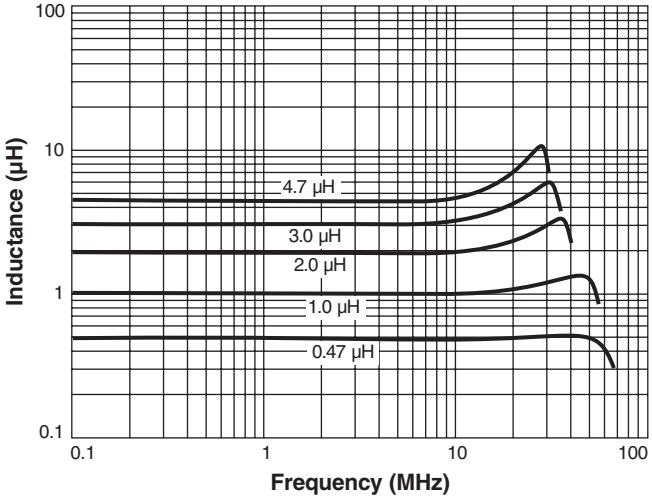


| Dash number | Terminal thickness (typ) (in / mm) |
|---|---|
| -471 | 0.0079 / 0.20 |
| -102 | 0.0079 / 0.20 |
| -202 | 0.0059 / 0.15 |
| -302 | 0.0039 / 0.10 |
| -472 | 0.0039 / 0.10 |

* For optional tin-lead and tin-silver-copper terminations, dimensions are for the mounted part. Dimensions before mounting can be an additional 0.005 inch / 0.13 mm.




**Recommended Land Pattern**

Dimensions are in inches / mm

**Packaging** 500/7″ reel; 2000/13″ reel Plastic tape: 12 mm wide, 0.23 mm thick, 8 mm pocket spacing, 3.25 mm pocket depth

Coilcraft®
www.coilcraft.com

**US** +1-847-639-6400 sales@coilcraft.com
**UK** +44-1236-730595 sales@coilcraft-europe.com
**Taiwan** +886-2-2264 3646 sales@coilcraft.com.tw
**China** +86-21-6218 8074 sales@coilcraft.com.cn
**Singapore** + 65-6484 8412 sales@coilcraft.com.sg

Document 1048-2 Revised 12/23/19

© Coilcraft Inc. 2019
This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001
Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

**Данный компонент на территории Российской Федерации**

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

**Офис по работе с юридическими лицами:**

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:
moschip.ru
moschip.ru_4
moschip.ru_6
moschip.ru_9