



# EVERLIGHT ELECTRONICS CO.,LTD.


## Technical Data Sheet

### 4.7mm 1Pcs Circuit Board Indicator

#### A2703B/SUR/S530-A3

#### ■ Features :

- Low power consumption
- High efficiency and low cost
- Good control and free combinations on the colors of LED lamps
- Good lock and easy to assembly
- Stackable and easy to assembly  
Stackable vertically and easy to assembly
- Versatile mounting on P.C board or panel
- Stackable horizontally and easy to assembly
- Pb free
- The product itself will remain within RoHS compliant version

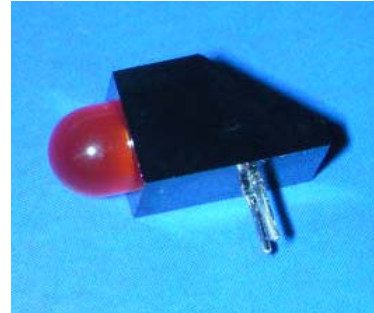

#### ■ Descriptions :

- ARRAY=Plastic Holder+Combinations of Lamps
- The array will easily mount the applicable lamps on any panel up to

#### ■ Applications :

- 1.Used as indicators of indicating the Degree, Functions, Positions etc, in electronic instruments.

| PART NO.           | Chip     |               | Lens Color   |
|--------------------|----------|---------------|--------------|
|                    | Material | Emitted Color |              |
| 7363-2SURD/S530-A3 | AlGaInP  | Hyper Red     | Red Diffused |




## Technical Data Sheet

## 4.7mm 1Pcs Circuit Board Indicator

A2703B/SUR/S530-A3

## Package Dimensions

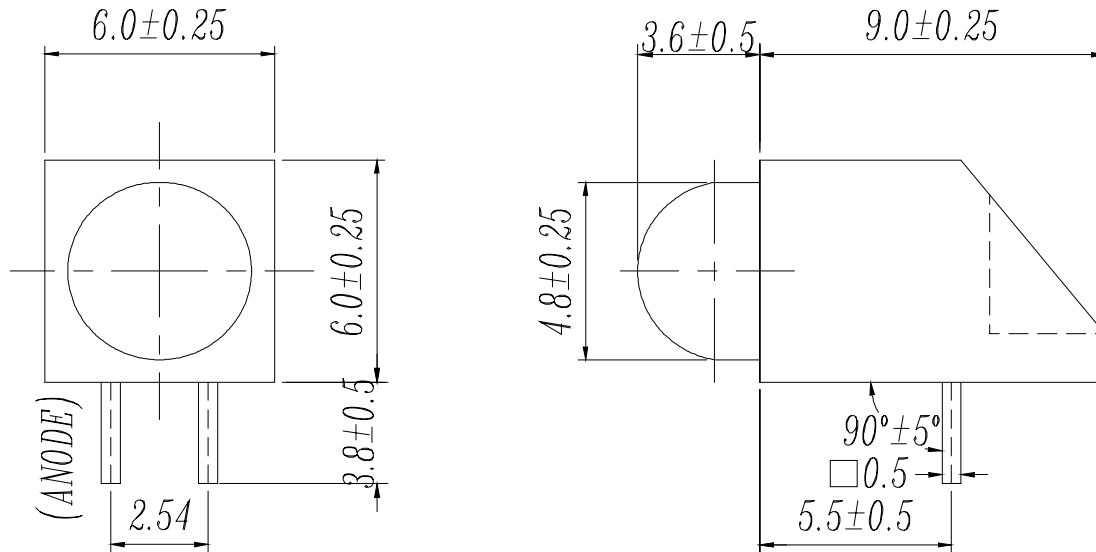

- Notes:** 1.All dimensions are in millimeters, tolerance is 0.25mm except being specified  
2.Lead spacing is measured where the lead emerge from the package  
The product itself will remain within RoHS compliant version

Absolute Maximum Ratings at  $T_a = 25^\circ\text{C}$ 

| Parameter               | Symbol | Rating      | Unit |
|-------------------------|--------|-------------|------|
| Forward Current         | IF     | 25          | mA   |
| Operating Temperature   | Topr   | -40 to +85  | °C   |
| Storage Temperature     | Tstg   | -40 to +100 | °C   |
| Soldering Temperature   | Tsol   | $260 \pm 5$ | °C   |
| Electrostatic Discharge | ESD    | 2000        | V    |
| Power Dissipation       | Pd     | 60          | mW   |
| Reverse Voltage         | VR     | 5           | V    |

Note: \*1:Soldering time  $\leq 5$  seconds.



EVERLIGHT ELECTRONICS CO.,LTD.

Technical Data Sheet

4.7mm 1Pcs Circuit Board Indicator

A2703B/SUR/S530-A3

Electro-Optical Characteristics(Ta=25°C)

| Parameter                    | Symbol         | Condition              | Min. | Typ. | Max. | Unit |
|------------------------------|----------------|------------------------|------|------|------|------|
| Forward Voltage              | V <sub>F</sub> | I <sub>F</sub> = 20 mA | /    | 2.0  | 2.4  | V    |
| Reverse Current              | I <sub>R</sub> | V <sub>R</sub> = 5 V   | /    | /    | 10   | μA   |
| Luminous Intensity           | I <sub>v</sub> | I <sub>F</sub> = 20 mA | 63   | 125  | /    | mcd  |
| Viewing Angle                | 2θ 1/2         | I <sub>F</sub> = 20 mA | /    | 40   | /    | deg  |
| Peak Wavelength              | λ <sub>p</sub> | I <sub>F</sub> = 20 mA | /    | 632  | /    | nm   |
| Dominant Wavelength          | λ <sub>d</sub> | I <sub>F</sub> = 20 mA | /    | 624  | /    | nm   |
| Spectrum Radiation Bandwidth | △λ             | I <sub>F</sub> = 20 mA | /    | 20   | /    | nm   |







# Technical Data Sheet

## 4.7mm 1Pcs Circuit Board Indicator

A2703B/SUR/S530-A3

### Typical Electro-Optical Characteristic Curves:

( SUR )

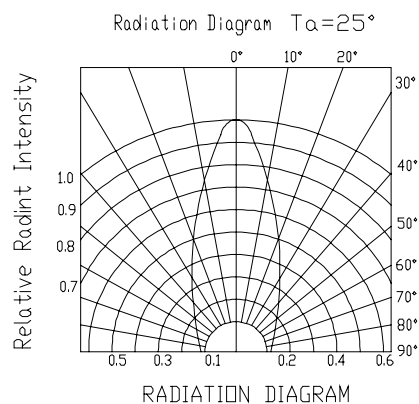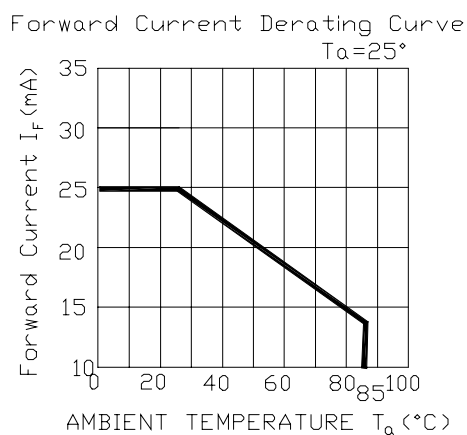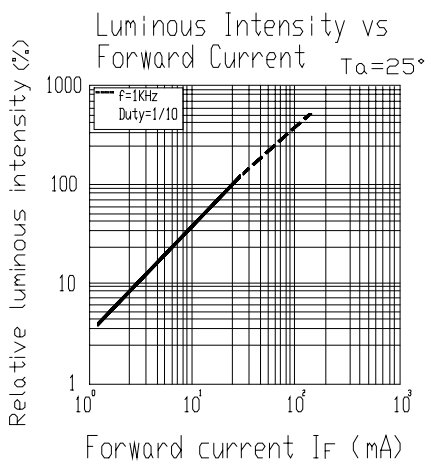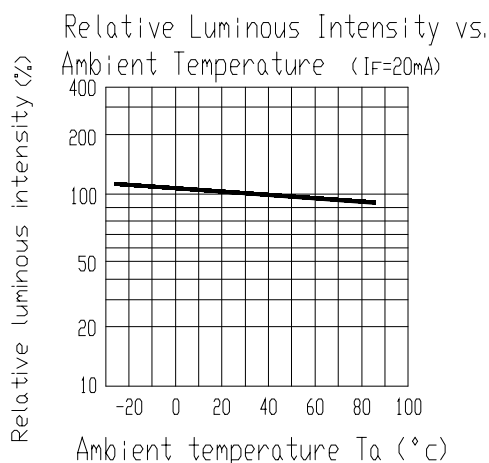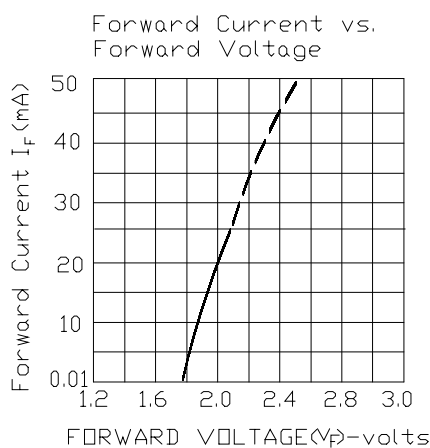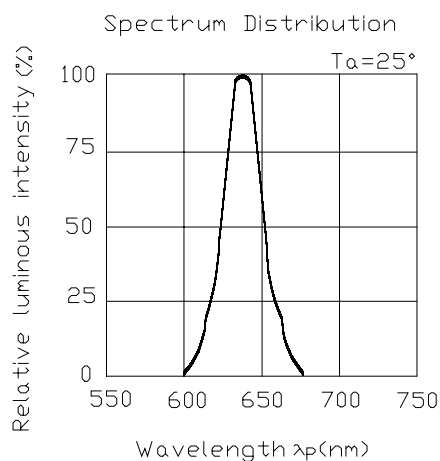



# Technical Data Sheet

## 4.7mm 1Pcs Circuit Board Indicator

A2703B/SUR/S530-A3

### ■ Reliability test items and conditions:

The reliability of products shall be satisfied with items listed below.

Confidence level : 97%

LTPD : 3%

| NO | Item                             | Test Conditions                                | Test Hours/Cycle | Sample Size | Failure Judgment Criteria                                           | Ac/Re |
|----|----------------------------------|------------------------------------------------|------------------|-------------|---------------------------------------------------------------------|-------|
| 1  | Solder Heat                      | TEMP : 260°C ± 5 °C                            | 10 SEC           | 76 PCS      | $I_v \leq I_{vt} * 0.5$<br>or<br>$V_f \geq U$<br>or<br>$V_f \leq L$ | 0/1   |
| 2  | Temperature Cycle                | H : +100°C 15min<br>§ 5 min<br>L : -40°C 15min | 300 CYCLES       | 76 PCS      |                                                                     | 0/1   |
| 3  | Thermal Shock                    | H : +100°C 5min<br>§ 10 sec<br>L : -10°C 5min  | 300 CYCLES       | 76 PCS      |                                                                     | 0/1   |
| 4  | High Temperature Storage         | TEMP : 100°C                                   | 1000 HRS         | 76 PCS      |                                                                     | 0/1   |
| 5  | Low Temperature Storage          | TEMP : -40°C                                   | 1000 HRS         | 76 PCS      |                                                                     | 0/1   |
| 6  | DC Operating Life                | TEMP : 25°C<br>I <sub>F</sub> = 20mA           | 1000 HRS         | 76 PCS      |                                                                     | 0/1   |
| 7  | High Temperature / High Humidity | 85°C / 85% RH                                  | 1000 HRS         | 76 PCS      |                                                                     | 0/1   |

Note : I<sub>vt</sub> : To test I<sub>v</sub> value of the chip before the reliability test

I<sub>v</sub> : The test value of the chip that has completed the reliability test

U : Upper Specification Limit

L : Lower Specification Limit



Technical Data Sheet  
4.7mm 1Pcs Circuit Board Indicator

A2703B/SUR/S530-A3

Packing Quantity Specification

1.500PCS/1Bag , 4Bags/1Box

2. 10Boxes/1Carton

Label Form Specification



CPN: Customer' s Production Number

P/N : Production Number

QTY: Packing Quantity

CAT: Ranks

HUE:Dominant Wavelength

REF: Reference

LOT No: Lot Number

MADE IN TAIWAN: Production Place

Notes

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.

The product itself will remain within RoHS compliant version

for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.

3. These specification sheets include materials protected under copyright of EVERLIGHT corporation.

Please don' t reproduce or cause anyone to reproduce them without EVERLIGHT' s consent.

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd,  
Tucheng, Taipei 236, Taiwan, R.O.C

Tel: (886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

<http://www.everlight.com>

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9