

## Description


The 843N571I is a PLL based clock synthesizer for use in Ethernet applications. The device uses IDT's fourth generation FemtoClock® NG technology for optimal high clock frequency and low phase noise performance, combined with a low power consumption and high power supply noise rejection. Using IDT's latest FemtoClock NG PLL technology, the 843N571I achieves <0.3ps RMS phase jitter performance.

843N571I can synthesize 100MHz, 125MHz, 156.25MHz and a low frequency 33.33MHz CPU clock from a single device. Six LVCMOS outputs also serve as additional buffering of the 25MHz crystal reference.


## Features

- Fourth generation FemtoClock® Next Generation (NG) technology
- Seven single-ended LVCMOS outputs, 30Ω output impedance
- Three LVPECL output pairs  
One differential LVPECL (QA, nQA) output pair: 156.25MHz  
Two selectable differential LVPECL output pairs (QB, nQB and QC, nQC): 100MHz and 125MHz
- One single-ended LVCMOS (QD0) 33.33MHz CPU clock
- Selectable external crystal or single-ended input source
- Crystal oscillator interface designed for 25MHz, parallel resonant crystal
- FemtoClock NG frequency multiplier provides low jitter, high frequency output
- FemtoClock NG VCO frequency: 2.5GHz
- RMS phase jitter @ 125MHz, using a 25MHz crystal (12kHz – 20MHz): 0.283ps (typical)
- Power supply noise rejection PSNR: -80dB
- 3.3V supply voltage
- -40C to 85C ambient operating temperature
- Lead-free (RoHS 6) packaging

## Pin Assignment

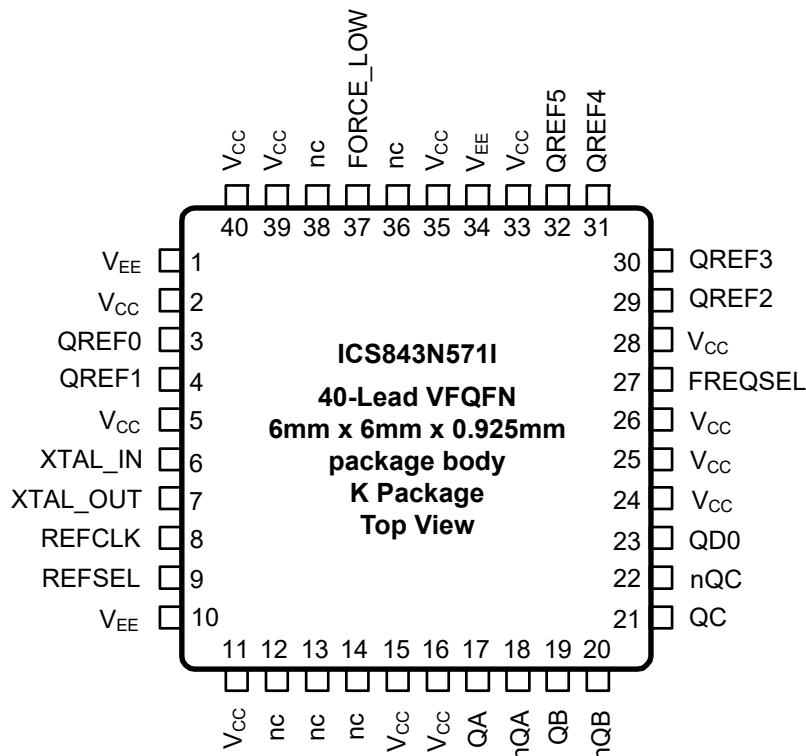

## Block Diagram

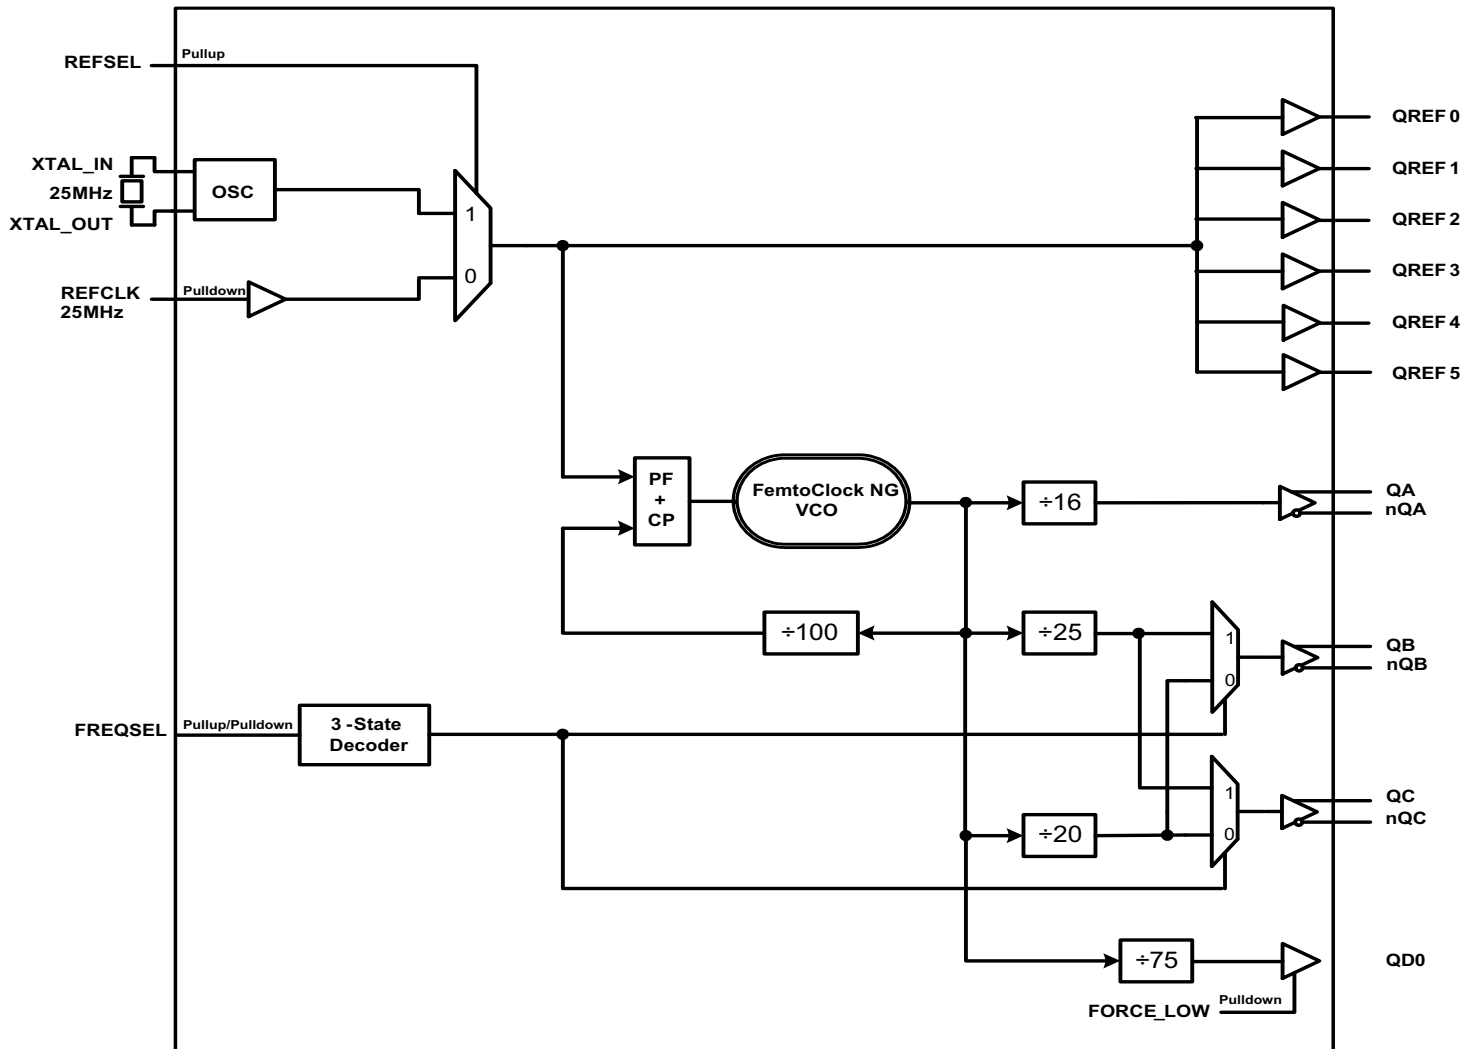

## Pin Description and Pin Characteristic Tables

**Table 1. Pin Descriptions**

| Number                                                    | Name                                           | Type   |                     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------------------------------------------------|------------------------------------------------|--------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1, 10, 34                                                 | V <sub>EE</sub>                                | Power  |                     | Negative supply pins.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 2, 5, 11, 15,<br>16, 24, 25,<br>26, 28, 33,<br>35, 39, 40 | V <sub>CC</sub>                                | Power  |                     | Power supply pins.<br>Pins 2, 28, 33 – power supply connection for the 25MHz LVCMOS outputs<br>Pin 5 – power supply connection for the crystal oscillator<br>Pins 11, 15, 26, 35 – power supply connection for the dividers and other core circuitry<br>Pin 16 (vposO) – power supply connection for the differential LVPECL outputs<br>Pin 24, 25 – power supply connection for the 33MHz LVCMOS output<br>Pin 39 – power supply connection for the digital logic<br>Pin 40 – power supply connection for the PLL |
| 3, 4,<br>29, 30,<br>31, 32                                | QREF0, QREF1,<br>QREF2, QREF3,<br>QREF4, QREF5 | Output |                     | Single-ended outputs. 3.3V LVCMOS/LVTTL reference levels.                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 6,<br>7                                                   | XTAL_IN,<br>XTAL_OUT                           | Input  |                     | Parallel resonant crystal interface. XTAL_OUT is the output, XTAL_IN is the input.                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 8                                                         | REFCLK                                         | Input  | Pulldown            | Single-ended LVCMOS/LVTTL reference clock input.                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 9                                                         | REFSEL                                         | Input  | Pullup              | Reference select pin. When HIGH, selects crystal. When LOW, selects REFCLK. See Table 3A. LVCMOS/LVTTL interface levels.                                                                                                                                                                                                                                                                                                                                                                                           |
| 12, 13, 14,<br>36, 38                                     | nc                                             |        |                     | No connect.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 17, 18                                                    | QA, nQA                                        | Output |                     | Differential output pair. LVPECL interface levels.                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 19, 20                                                    | QB, nQB                                        | Output |                     | Differential output pair. LVPECL interface levels.                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 21, 22                                                    | QC, nQC                                        | Output |                     | Differential output pair. LVPECL interface levels.                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 23                                                        | QD0                                            | Output |                     | Single-ended output. 3.3V LVCMOS/LVTTL reference levels.                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 27                                                        | FREQSEL                                        | Input  | Pullup/<br>Pulldown | Frequency select pin. See Table 3B. LVCMOS/LVTTL interface levels.                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 37                                                        | FORCE_LOW                                      | Input  | Pulldown            | Forces the QD0 output into a low state. See Table 3C. LVCMOS/LVTTL interface levels.                                                                                                                                                                                                                                                                                                                                                                                                                               |

NOTE: Pullup and Pulldown refer to internal input resistors. See Table 2, *Pin Characteristics*, for typical values.

**Table 2. Pin Characteristics**

| Symbol                | Parameter                                  |                | Test Conditions        | Minimum | Typical | Maximum | Units |
|-----------------------|--------------------------------------------|----------------|------------------------|---------|---------|---------|-------|
| C <sub>IN</sub>       | Input Capacitance                          |                | Crystal Not Included   |         | 2       |         | pF    |
| C <sub>PD</sub>       | Power Dissipation Capacitance (per output) | QD0, QREF[0:5] | V <sub>CC</sub> = 3.6V |         | 6       |         | pF    |
| R <sub>PULLUP</sub>   | Input Pullup Resistor                      |                |                        |         | 51      |         | kΩ    |
| R <sub>PULLDOWN</sub> | Input Pulldown Resistor                    |                |                        |         | 51      |         | kΩ    |
| R <sub>OUT</sub>      | Output Impedance                           | QD0, QREF[0:5] |                        |         | 30      |         | Ω     |

## Function Tables

**Table 3A. REFSEL Function Table**

| Inputs      | Input Source      |
|-------------|-------------------|
| REFSEL      |                   |
| 0           | REFCLK            |
| 1 (default) | XTAL_IN, XTAL_OUT |

**Table 3C. FORCE\_LOW Function Table**

| Inputs      | Output Frequency (MHz) |
|-------------|------------------------|
| FORCE_LOW   | QD0                    |
| 0 (default) | 33.33                  |
| 1           | Disabled               |

**Table 3B. FREQSEL Function Table**

| Inputs          | Output Frequency (MHz) |         |
|-----------------|------------------------|---------|
| FREQSEL         | QB, nQB                | QC, nQC |
| 0               | 125                    | 125     |
| 1               | 100                    | 100     |
| Float (default) | 125                    | 100     |

## Absolute Maximum Ratings

Exposure to absolute maximum rating conditions for extended periods may affect product reliability. Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These ratings are stress specifications only. Functional operation of product at these conditions or any conditions beyond those listed in the *DC Characteristics* or *AC Characteristics* is not implied.

| Item                                                           | Rating                               |
|----------------------------------------------------------------|--------------------------------------|
| Supply Voltage, $V_{CC}$                                       | 3.63V                                |
| Inputs, $V_I$<br>XTAL_IN<br>Other Inputs                       | 0V to 2V<br>-0.5V to $V_{CC} + 0.5V$ |
| Outputs, $I_O$ (LVCMOS)                                        | -0.5V to $V_{CC} + 0.5V$             |
| Outputs, $I_O$ (LVPECL)<br>Continuous Current<br>Surge Current | 50mA<br>100mA                        |
| Package Thermal Impedance, $\theta_{JA}$                       | 37.7°C/W (0 mps)                     |
| Maximum Junction Temperature, $T_{J,MAX}$                      | 150°C                                |
| Storage Temperature, $T_{STG}$                                 | -65°C to 150°C                       |

## Recommended Operating Conditions

| Symbol | Parameter               | Minimum | Typical | Maximum | Units |
|--------|-------------------------|---------|---------|---------|-------|
| $T_A$  | Ambient air temperature | -40     |         | 85      | °C    |
| $T_J$  | Junction temperature    |         |         | 125     | °C    |

NOTE 1: It is the user's responsibility to ensure that device junction temperature remains below the maximum allowed.

NOTE 2: All conditions in the table must be met to guarantee device functionality.

NOTE 3: The device is verified to the maximum operating junction temperature through simulation.

## DC Electrical Characteristics

**Table 4A. Power Supply DC Characteristics,  $V_{CC} = 3.3V \pm 0.3V$ ,  $V_{EE} = 0V$ ,  $T_A = -40^\circ C$  to  $85^\circ C$**

| Symbol   | Parameter            | Test Conditions | Minimum | Typical | Maximum | Units |
|----------|----------------------|-----------------|---------|---------|---------|-------|
| $V_{CC}$ | Power Supply Voltage |                 | 3.0     | 3.3     | 3.6     | V     |
| $I_{EE}$ | Power Supply Current | No Load         |         |         | 250     | mA    |

**Table 4B. LVCMOS/LVTTL DC Characteristics,  $V_{CC} = 3.3V \pm 0.3V$ ,  $T_A = -40^\circ C$  to  $85^\circ C$**

| Symbol   | Parameter            | Test Conditions   | Minimum          | Typical | Maximum          | Units |
|----------|----------------------|-------------------|------------------|---------|------------------|-------|
| $V_{IH}$ | Input High Voltage   | REFSEL, FORCE_LOW | 2                |         | $V_{CC} + 0.3$   | V     |
|          |                      | FREQSEL           | $V_{CC} - 0.4$   |         |                  | V     |
| $V_{IL}$ | Input Low Voltage    | REFSEL, FORCE_LOW | -0.3             |         | 0.8              | V     |
|          |                      | FREQSEL           |                  |         | 0.4              | V     |
| $V_{IM}$ | Input Medium Voltage | FREQSEL           | $V_{CC}/2 - 0.1$ |         | $V_{CC}/2 + 0.1$ | V     |

| Symbol   | Parameter                   | Test Conditions                                        | Minimum | Typical | Maximum | Units   |
|----------|-----------------------------|--------------------------------------------------------|---------|---------|---------|---------|
| $I_{IH}$ | Input High Current          | REFCLK, FREQSEL, FORCE_LOW<br>$V_{CC} = V_{IN} = 3.6V$ |         |         | 150     | $\mu A$ |
|          |                             | REFSEL<br>$V_{CC} = V_{IN} = 3.6V$                     |         |         | 5       | $\mu A$ |
| $I_{IL}$ | Input Low Current           | REFCLK, FORCE_LOW<br>$V_{CC} = 3.6V, V_{IN} = 0V$      | -5      |         |         | $\mu A$ |
|          |                             | REFSEL, FREQSEL<br>$V_{CC} = 3.6V, V_{IN} = 0V$        | -150    |         |         | $\mu A$ |
| $V_{OH}$ | Output High Voltage; NOTE 1 | $V_{CC} = 3.3V \pm 0.3V$                               | 2.3     |         |         | V       |
| $V_{OL}$ | Output Low Voltage; NOTE 1  | $V_{CC} = 3.3V \pm 0.3V$                               |         |         | 0.8     | V       |

NOTE 1: Outputs terminated with  $50\Omega$  to  $V_{CC}/2$ . See Parameter Measurement Information, *Output Load Test Circuit diagrams*.

**Table 4C. LVPECL DC Characteristics,  $V_{CC} = 3.3V \pm 0.3V$ ,  $V_{EE} = 0V$ ,  $T_A = -40^\circ C$  to  $85^\circ C$**

| Symbol      | Parameter                         | Test Conditions | Minimum        | Typical | Maximum        | Units |
|-------------|-----------------------------------|-----------------|----------------|---------|----------------|-------|
| $V_{OH}$    | Output High Voltage; NOTE 1       |                 | $V_{CC} - 1.4$ |         | $V_{CC} - 0.8$ | V     |
| $V_{OL}$    | Output Low Voltage; NOTE 1        |                 | $V_{CC} - 2.0$ |         | $V_{CC} - 1.6$ | V     |
| $V_{SWING}$ | Peak-to-Peak Output Voltage Swing |                 | 0.6            |         | 1.0            | V     |

NOTE 1: Outputs terminated with  $50\Omega$  to  $V_{CC} - 2V$ .

**Table 5. Crystal Characteristics**

| Parameter                          | Test Conditions | Minimum     | Typical | Maximum | Units    |
|------------------------------------|-----------------|-------------|---------|---------|----------|
| Mode of Oscillation                |                 | Fundamental |         |         |          |
| Frequency                          |                 |             | 25      |         | MHz      |
| Equivalent Series Resistance (ESR) |                 |             |         | 50      | $\Omega$ |
| Shunt Capacitance                  |                 |             |         | 7       | pF       |

## AC Electrical Characteristics

**Table 6A. LVPECL AC Characteristics,  $V_{CC} = 3.3V \pm 0.3V$ ,  $V_{EE} = 0V$ ,  $T_A = -40^\circ C$  to  $85^\circ C$**

| Symbol    | Parameter        | Test Conditions | Minimum | Typical | Maximum | Units |
|-----------|------------------|-----------------|---------|---------|---------|-------|
| $f_{IN}$  | Input Frequency  |                 |         | 25      |         | MHz   |
| $f_{OUT}$ | Output Frequency |                 | 100     |         | 156.25  | MHz   |

| Symbol                          | Parameter                           |                              | Test Conditions                                                                   | Minimum | Typical | Maximum | Units |
|---------------------------------|-------------------------------------|------------------------------|-----------------------------------------------------------------------------------|---------|---------|---------|-------|
| t <sub>jit</sub> ( $\theta$ )   | RMS Phase Jitter (Random)<br>NOTE 1 |                              | 156.25MHz f <sub>OUT</sub> , 25MHz crystal<br>Integration Range:<br>12kHz – 20MHz |         | 0.233   |         | ps    |
|                                 |                                     |                              | 125MHz f <sub>OUT</sub> , 25MHz crystal<br>Integration Range:<br>12kHz – 20MHz    |         | 0.283   |         | ps    |
|                                 |                                     |                              | 100MHz f <sub>OUT</sub> , 25MHz crystal<br>Integration Range:<br>12kHz – 20MHz    |         | 0.299   |         | ps    |
| t <sub>sk</sub> (o)             | Output Skew; NOTE 2, 3              |                              | Measured on the Rising Edge                                                       |         |         | 40      | ps    |
| PSNR                            | Power<br>Supply Noise<br>Reduction  | Pin 40<br>(V <sub>CC</sub> ) | From DC to 8MHz,<br>FORCE_LOW = HIGH                                              |         | -75     |         | dB    |
|                                 |                                     | Pin 40<br>(V <sub>CC</sub> ) | From DC to 3MHz,<br>FORCE_LOW = LOW                                               |         | -80     |         | dB    |
| t <sub>R</sub> / t <sub>F</sub> | Output Rise/Fall Time               |                              | 20% to 80%                                                                        | 150     |         | 550     | ps    |
| odc                             | Output Duty Cycle                   |                              |                                                                                   | 48      |         | 52      | %     |

NOTE: Electrical parameters are guaranteed over the specified ambient operating temperature range, which is established when the device is mounted in a test socket with maintained transverse airflow greater than 500 lfpm. The device will meet specifications after thermal equilibrium has been reached under these conditions

NOTE 1: Refer to the Phase Noise Plot.

NOTE 2: This parameter is defined in accordance with JEDEC Standard 65.

NOTE 3: Defined as skew between outputs at the same supply voltage and with equal load conditions. Measured at the differential crosspoints.

**Table 6B. AC Characteristics for Single Side Band Power Levels (LVPECL Outputs),**

V<sub>CC</sub> = 3.3V ± 0.3V, V<sub>EE</sub> = 0V, T<sub>A</sub> = 25°C

| Symbol          | Parameter                                            | Test Conditions                        | Minimum | Typical | Maximum | Units  |
|-----------------|------------------------------------------------------|----------------------------------------|---------|---------|---------|--------|
| $\Phi_N$ (1k)   | Single-side band phase noise,<br>1kHz from Carrier   | 156.25MHz,<br>33.33MHz Output disabled |         | -120    |         | dBc/Hz |
| $\Phi_N$ (10k)  | Single-side band phase noise,<br>10kHz from Carrier  |                                        |         | -132    |         | dBc/Hz |
| $\Phi_N$ (100k) | Single-side band phase noise,<br>100kHz from Carrier |                                        |         | -135    |         | dBc/Hz |
| $\Phi_N$ (1M)   | Single-side band phase noise,<br>1MHz from Carrier   |                                        |         | -140    |         | dBc/Hz |
| $\Phi_N$ (10M)  | Single-side band phase noise,<br>10MHz from Carrier  |                                        |         | -156    |         | dBc/Hz |
| $\Phi_N$ (20M)  | Single-side band phase noise,<br>20MHz from Carrier  |                                        |         | -157    |         | dBc/Hz |

| Symbol         | Parameter                                         | Test Conditions                     | Minimum | Typical | Maximum | Units  |
|----------------|---------------------------------------------------|-------------------------------------|---------|---------|---------|--------|
| $\Phi_N(1k)$   | Single-side band phase noise, 1kHz from Carrier   | 125MHz,<br>33.33MHz Output disabled |         | -121    |         | dBc/Hz |
| $\Phi_N(10k)$  | Single-side band phase noise, 10kHz from Carrier  |                                     |         | -133    |         | dBc/Hz |
| $\Phi_N(100k)$ | Single-side band phase noise, 100kHz from Carrier |                                     |         | -137    |         | dBc/Hz |
| $\Phi_N(1M)$   | Single-side band phase noise, 1MHz from Carrier   |                                     |         | -143    |         | dBc/Hz |
| $\Phi_N(10M)$  | Single-side band phase noise, 10MHz from Carrier  |                                     |         | -153    |         | dBc/Hz |
| $\Phi_N(20M)$  | Single-side band phase noise, 20MHz from Carrier  |                                     |         | -153    |         | dBc/Hz |
| $\Phi_N(1k)$   | Single-side band phase noise, 1kHz from Carrier   | 100MHz,<br>33.33MHz Output disabled |         | -123    |         | dBc/Hz |
| $\Phi_N(10k)$  | Single-side band phase noise, 10kHz from Carrier  |                                     |         | -135    |         | dBc/Hz |
| $\Phi_N(100k)$ | Single-side band phase noise, 100kHz from Carrier |                                     |         | -139    |         | dBc/Hz |
| $\Phi_N(1M)$   | Single-side band phase noise, 1MHz from Carrier   |                                     |         | -145    |         | dBc/Hz |
| $\Phi_N(10M)$  | Single-side band phase noise, 10MHz from Carrier  |                                     |         | -154    |         | dBc/Hz |
| $\Phi_N(20M)$  | Single-side band phase noise, 20MHz from Carrier  |                                     |         | -154    |         | dBc/Hz |

NOTE: Electrical parameters are guaranteed over the specified ambient operating temperature range, which is established when the device is mounted in a test socket with maintained transverse airflow greater than 500 lfpm. The device will meet specifications after thermal equilibrium has been reached under these conditions.

**Table 6C. LVCMOS AC Characteristics,  $V_{CC} = 3.3V \pm 0.3V$ ,  $T_A = -40^\circ C$  to  $85^\circ C$**

| Symbol            | Parameter                           | Test Conditions                                                          | Minimum | Typical | Maximum | Units |
|-------------------|-------------------------------------|--------------------------------------------------------------------------|---------|---------|---------|-------|
| $f_{IN}$          | Input Frequency                     |                                                                          |         | 25      |         | MHz   |
| $f_{OUT}$         | Output Frequency                    |                                                                          | 25      |         | 33.33   | MHz   |
| $t_{jit}(\theta)$ | RMS Phase Jitter (Random)<br>NOTE 1 | 33.33MHz $f_{OUT}$ , 25MHz crystal<br>Integration Range:<br>12kHz – 5MHz |         | 0.266   |         | ps    |
|                   |                                     | 25MHz $f_{OUT}$ , 25MHz crystal<br>Integration Range:<br>12kHz – 5MHz    |         | 0.212   |         | ps    |
| $t_{sk(o)}$       | Output Skew;<br>NOTE 2, 3           | QREF[0:5]<br>Measured on the Rising Edge                                 |         |         | 50      | ps    |
| PSNR              | Power Supply<br>Noise Reduction     | Pin 40,<br>( $V_{CC}$ )<br>From DC to 6.25MHz                            |         | -80     |         | dB    |
| $t_R / t_F$       | Output Rise/Fall Time               | 20% to 80%                                                               | 200     |         | 600     | ps    |
| odc               | Output Duty Cycle                   |                                                                          | 48      |         | 52      | %     |

NOTE: Electrical parameters are guaranteed over the specified ambient operating temperature range, which is established when the device is mounted in a test socket with maintained transverse airflow greater than 500 lfpm. The device will meet specifications after thermal equilibrium has been reached under these conditions

NOTE 1: Refer to the Phase Noise Plot.



NOTE 2: This parameter is defined in accordance with JEDEC Standard 65.

NOTE 3: Defined as skew between outputs at the same supply voltage and with equal load conditions. Measured at  $V_{CC}/2$ .


**Table 6D. AC Characteristics for Single Side Band Power Levels (LVCMOS Outputs),**

$V_{CC} = 3.3V \pm 0.3V$ ,  $V_{EE} = 0V$ ,  $T_A = 25^\circ C$


| Symbol         | Parameter                                         | Test Conditions | Minimum | Typical | Maximum | Units  |
|----------------|---------------------------------------------------|-----------------|---------|---------|---------|--------|
| $\Phi_N(1k)$   | Single-side band phase noise, 1kHz from Carrier   | 33.33MHz        |         | -134    |         | dBc/Hz |
| $\Phi_N(10k)$  | Single-side band phase noise, 10kHz from Carrier  |                 |         | -144    |         | dBc/Hz |
| $\Phi_N(100k)$ | Single-side band phase noise, 100kHz from Carrier |                 |         | -149    |         | dBc/Hz |
| $\Phi_N(1M)$   | Single-side band phase noise, 1MHz from Carrier   |                 |         | -153    |         | dBc/Hz |
| $\Phi_N(5M)$   | Single-side band phase noise, 5MHz from Carrier   |                 |         | -159    |         | dBc/Hz |
| $\Phi_N(1k)$   | Single-side band phase noise, 1kHz from Carrier   | 25MHz           |         | -137    |         | dBc/Hz |
| $\Phi_N(10k)$  | Single-side band phase noise, 10kHz from Carrier  |                 |         | -152    |         | dBc/Hz |
| $\Phi_N(100k)$ | Single-side band phase noise, 100kHz from Carrier |                 |         | -158    |         | dBc/Hz |
| $\Phi_N(1M)$   | Single-side band phase noise, 1MHz from Carrier   |                 |         | -160    |         | dBc/Hz |
| $\Phi_N(5M)$   | Single-side band phase noise, 5MHz from Carrier   |                 |         | -160    |         | dBc/Hz |

NOTE: Electrical parameters are guaranteed over the specified ambient operating temperature range, which is established when the device is mounted in a test socket with maintained transverse airflow greater than 500 lfpm. The device will meet specifications after thermal equilibrium has been reached under these conditions.


## Typical Phase Noise at 25MHz (LVCMOS Output)

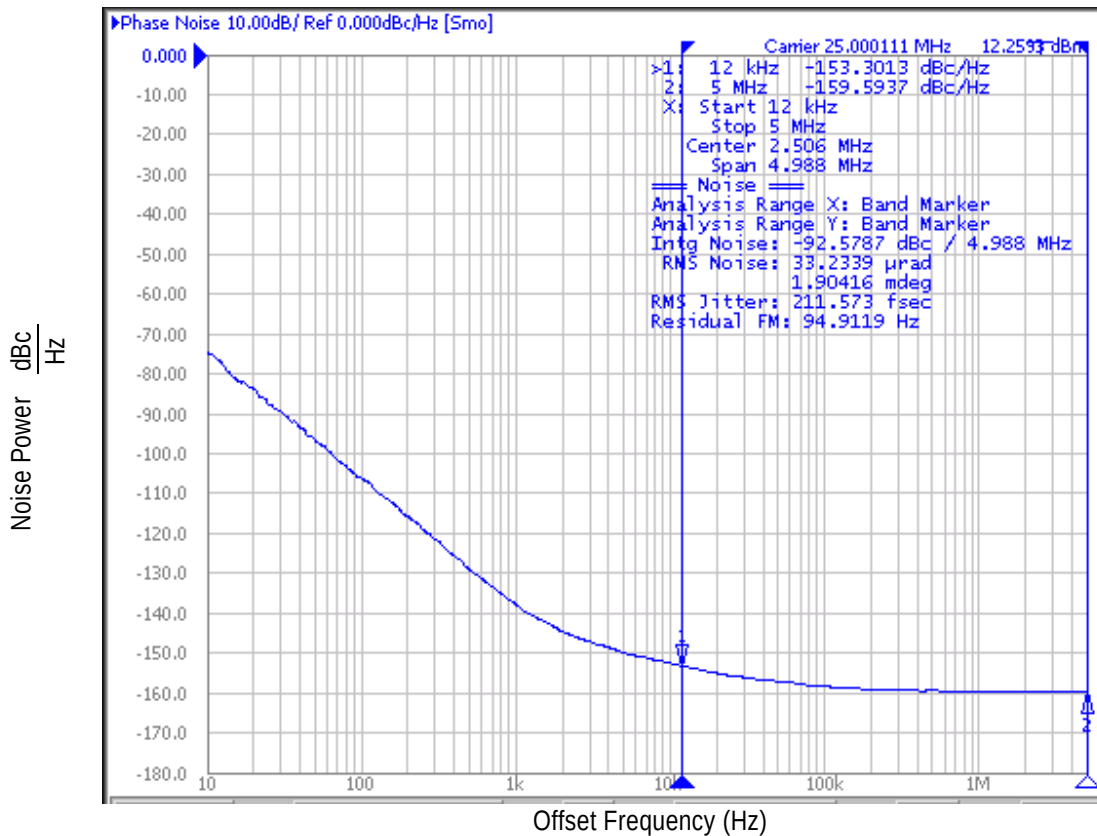


## Typical Phase Noise at 33.33MHz (LVCMOS Output)

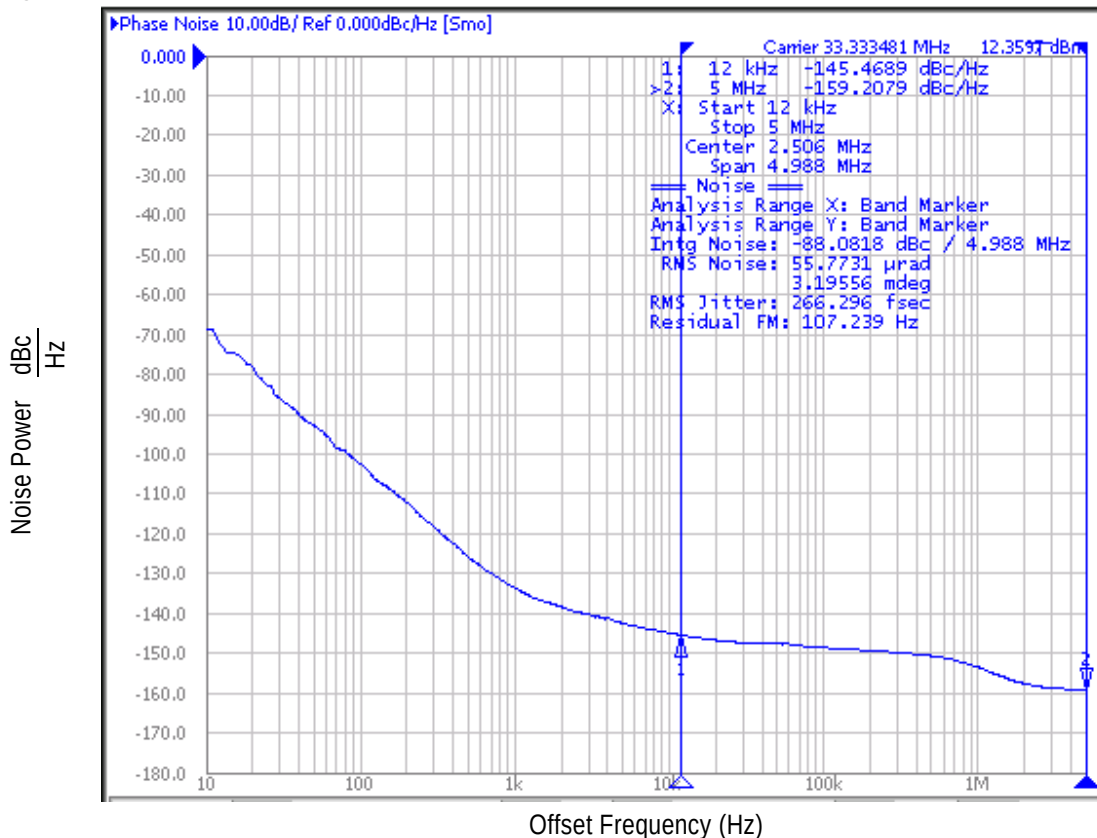


## Typical Phase Noise at 100MHz (LVPECL Output)

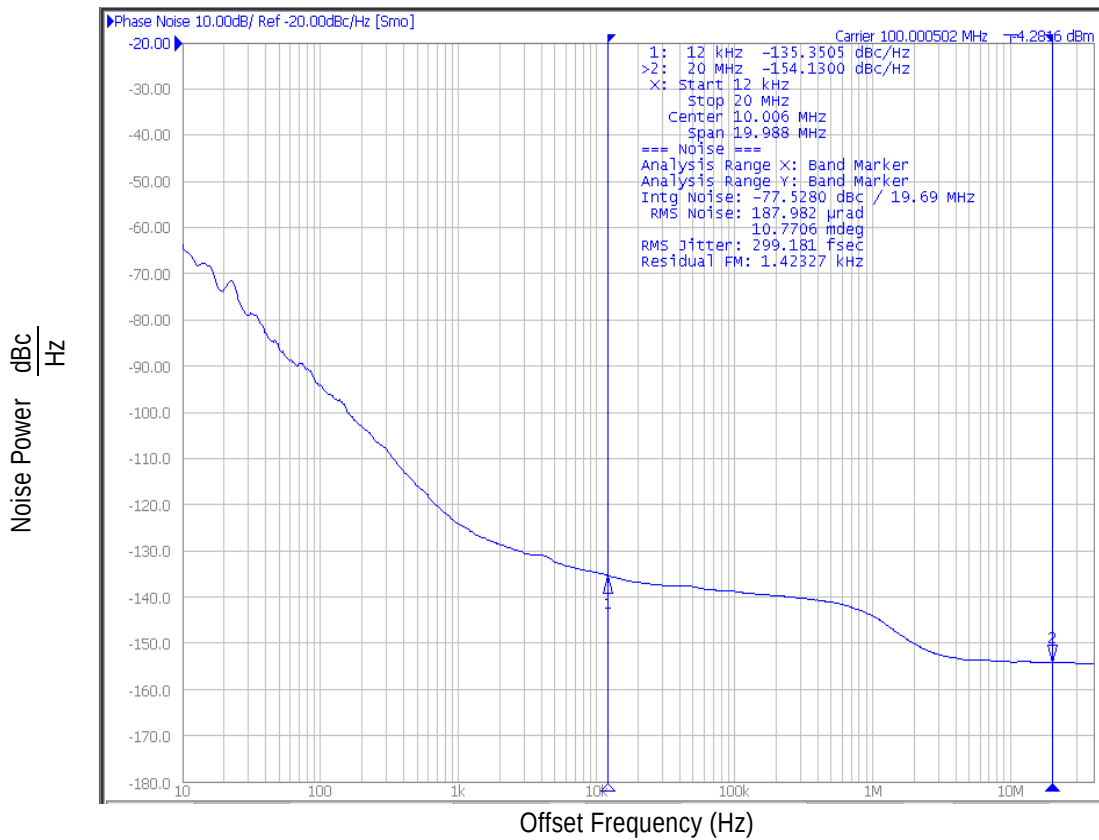


## Typical Phase Noise at 125MHz (LVPECL Output)

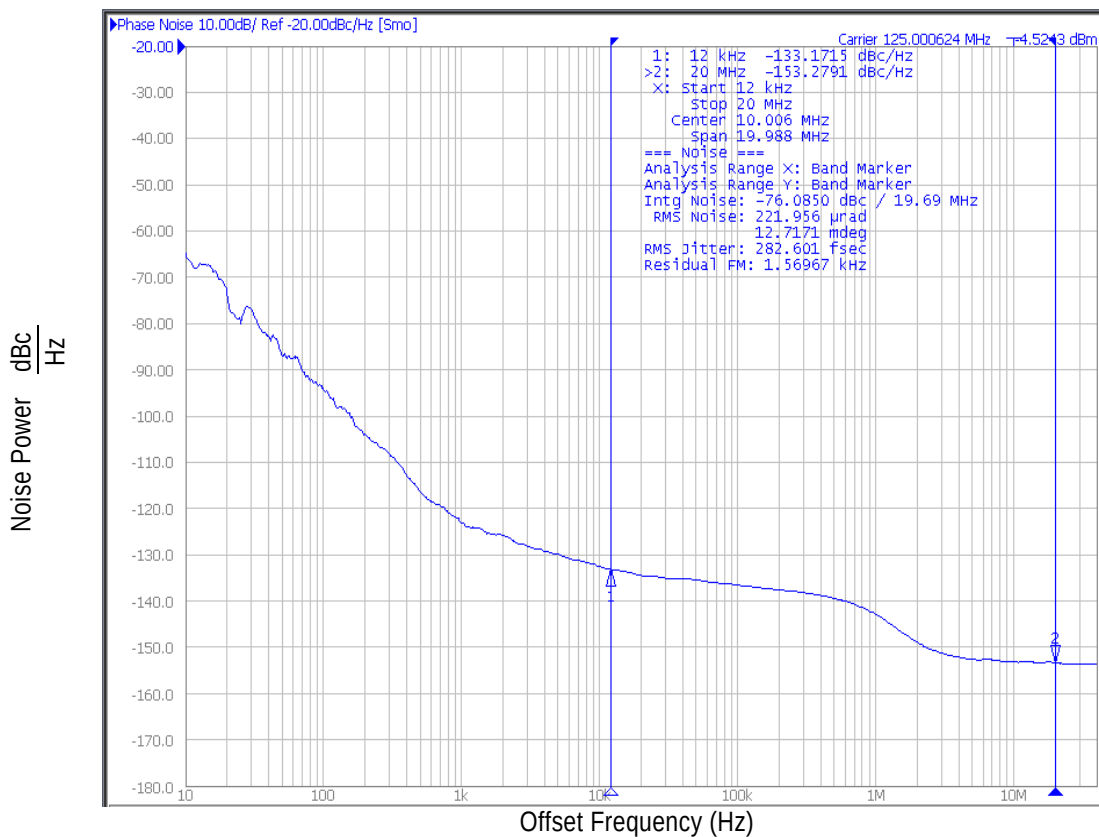


## Typical Phase Noise at 156.25MHz (LVPECL Output)

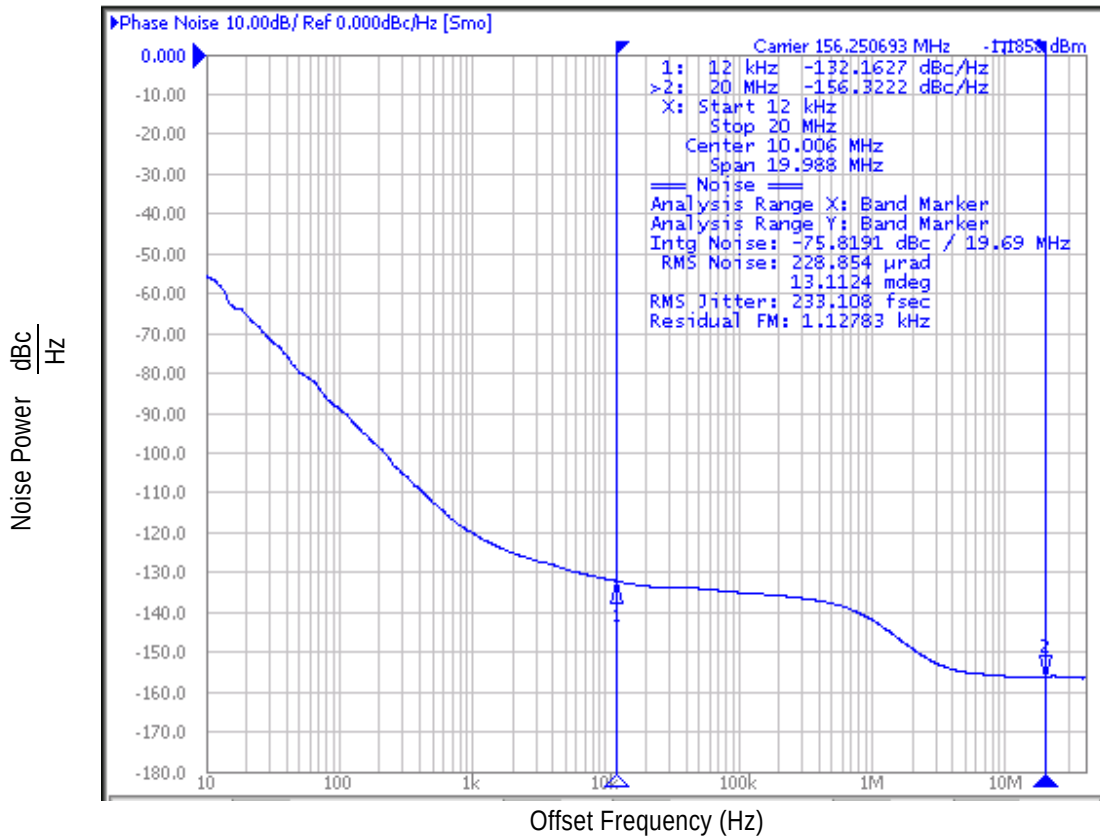


## Parameter Measurement Information

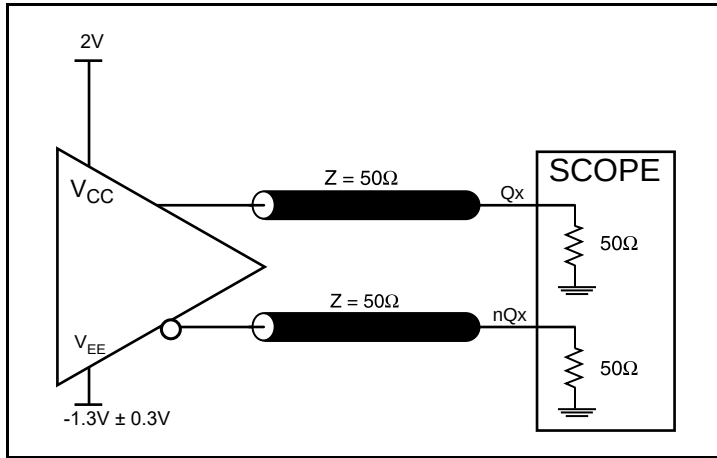


**LVPECL Output Load Test Circuit**

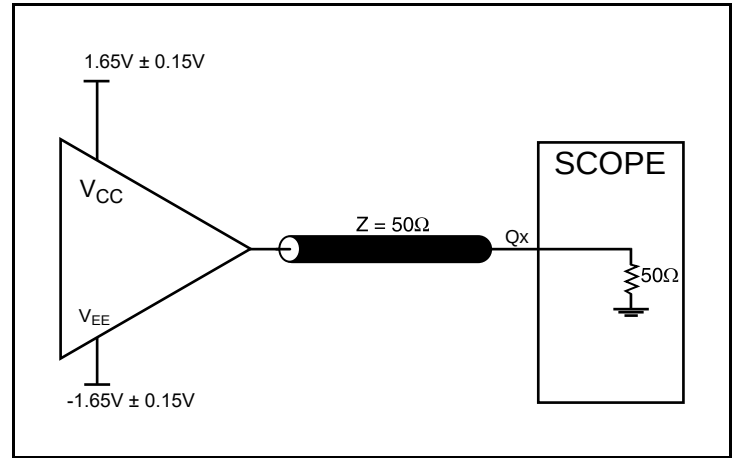


**LVCMOS Output Load Test Circuit**

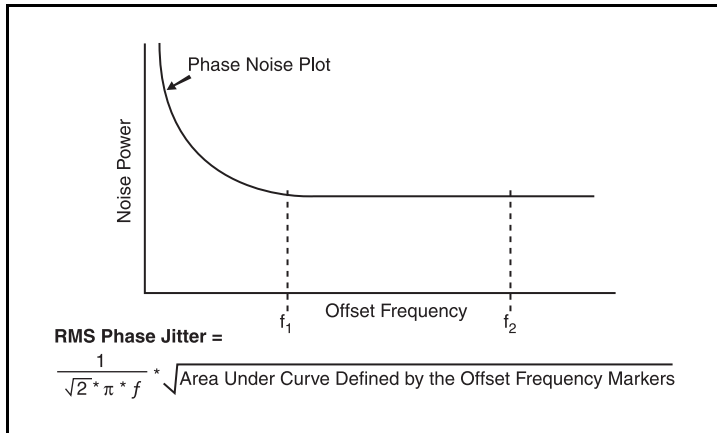


**Phase Jitter**

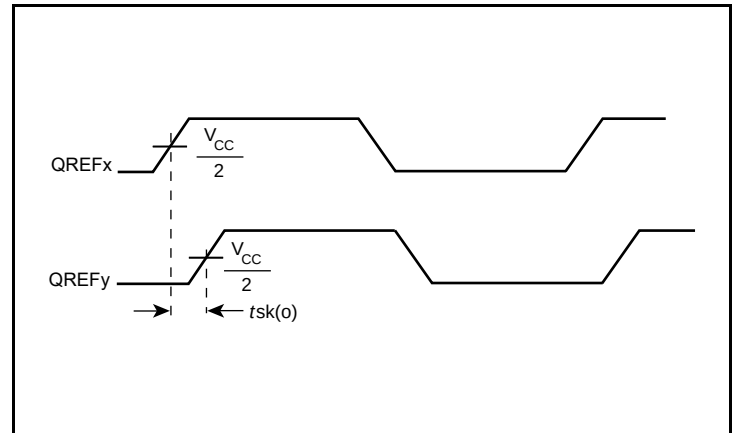

**LVCMOS Output Skew**

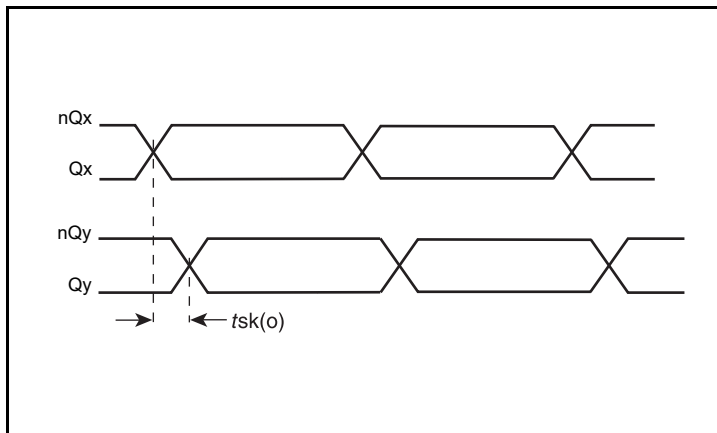


**LVPECL Output Skew**

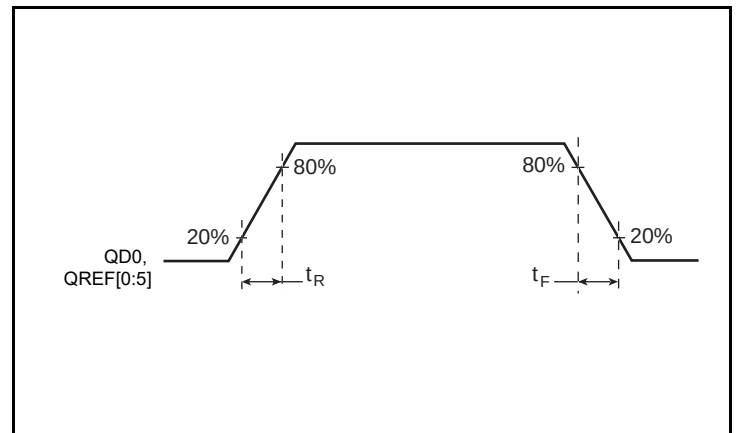


**LVCMOS Output Rise/Fall Time**


## Parameter Measurement Information, continued

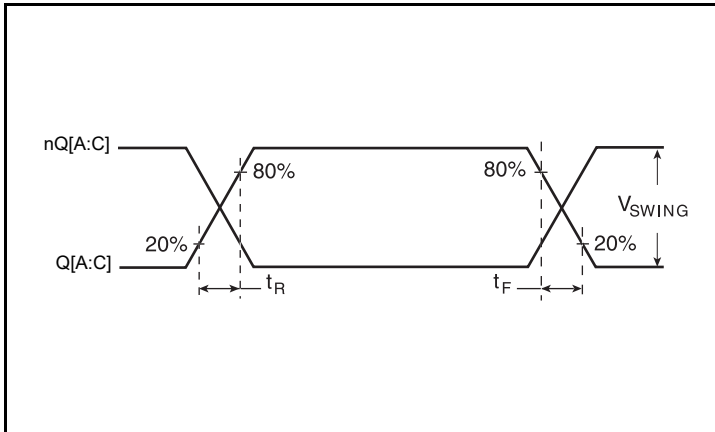

**LVPECL Output Rise/Fall Time**

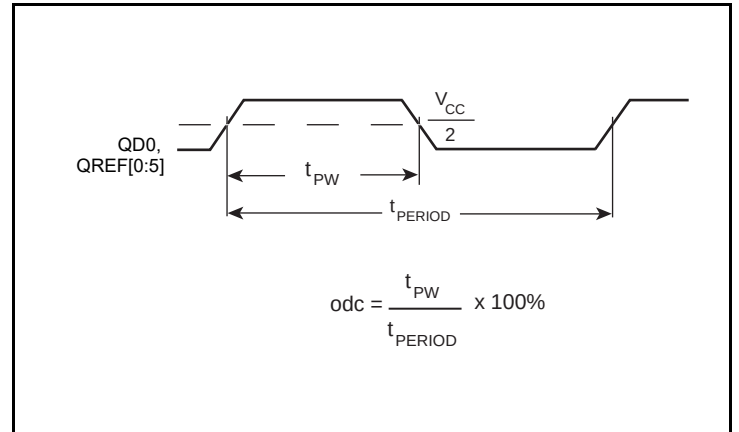

**LVCMOS Output Duty Cycle/Pulse Width/Period**

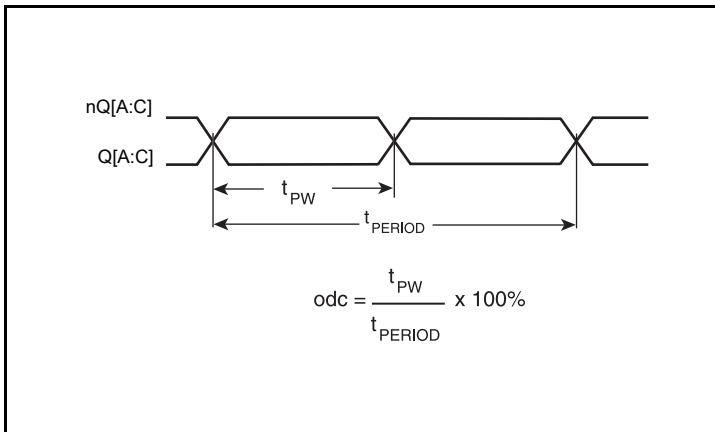


**LVPECL Output Duty Cycle/Pulse Width/Period**

## Applications Information


### Overdriving the XTAL Interface

The XTAL\_IN input can accept a single-ended LVCMOS signal through an AC coupling capacitor. A general interface diagram is shown in *Figure 1A*. The XTAL\_OUT pin can be left floating. The maximum amplitude of the input signal should not exceed 2V and the input edge rate can be as slow as 10ns. This configuration requires that the output impedance of the driver ( $R_o$ ) plus the series resistance ( $R_s$ ) equals the transmission line impedance. In addition,

matched termination at the crystal input will attenuate the signal in half. This can be done in one of two ways. First,  $R_1$  and  $R_2$  in parallel should equal the transmission line impedance. For most 50 $\Omega$  applications,  $R_1$  and  $R_2$  can be 100 $\Omega$ . This can also be accomplished by removing  $R_1$  and making  $R_2$  50 $\Omega$ . By overdriving the crystal oscillator, the device will be functional, but note, the device performance is guaranteed by using a quartz crystal.

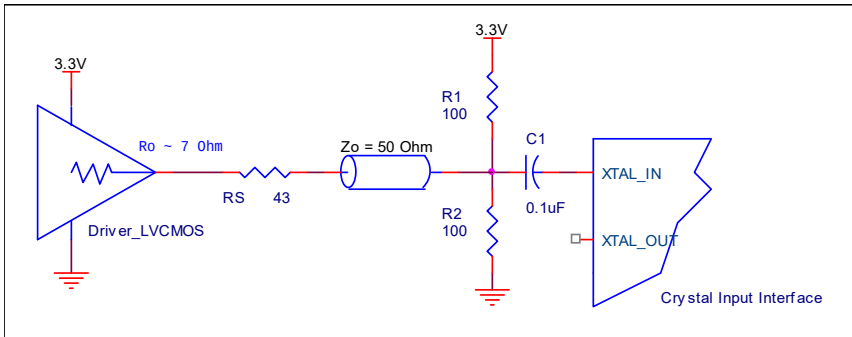

**Figure 1A. General Diagram for LVCMOS Driver to XTAL Input Interface**

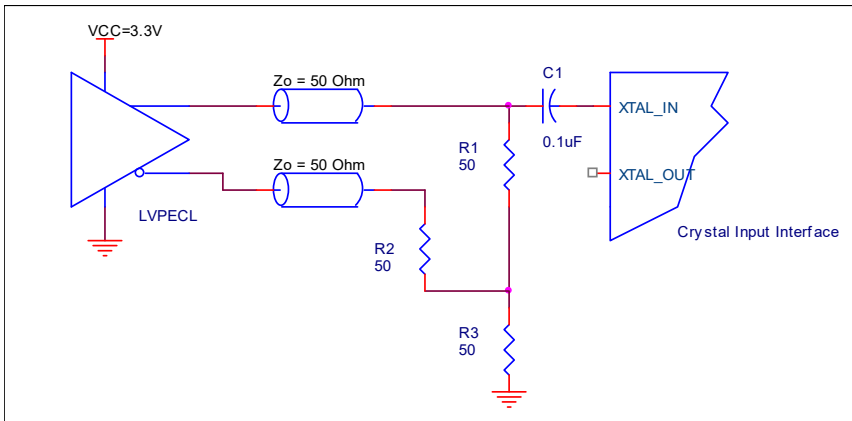


**Figure 1B. General Diagram for LVPECL Driver to XTAL Input Interface**

## VFQFN EPAD Thermal Release Path

In order to maximize both the removal of heat from the package and the electrical performance, a land pattern must be incorporated on the Printed Circuit Board (PCB) within the footprint of the package corresponding to the exposed metal pad or exposed heat slug on the package, as shown in *Figure 2*. The solderable area on the PCB, as defined by the solder mask, should be at least the same size/shape as the exposed pad/slug area on the package to maximize the thermal/electrical performance. Sufficient clearance should be designed on the PCB between the outer edges of the land pattern and the inner edges of pad pattern for the leads to avoid any shorts.

While the land pattern on the PCB provides a means of heat transfer and electrical grounding from the package to the board through a solder joint, thermal vias are necessary to effectively conduct from the surface of the PCB to the ground plane(s). The land pattern must be connected to ground through these vias. The vias act as “heat pipes”. The number of vias (i.e. “heat pipes”) are application specific

and dependent upon the package power dissipation as well as electrical conductivity requirements. Thus, thermal and electrical analysis and/or testing are recommended to determine the minimum number needed. Maximum thermal and electrical performance is achieved when an array of vias is incorporated in the land pattern. It is recommended to use as many vias connected to ground as possible. It is also recommended that the via diameter should be 12 to 13mils (0.30 to 0.33mm) with 1oz copper via barrel plating. This is desirable to avoid any solder wicking inside the via during the soldering process which may result in voids in solder between the exposed pad/slug and the thermal land. Precautions should be taken to eliminate any solder voids between the exposed heat slug and the land pattern. Note: These recommendations are to be used as a guideline only. For further information, please refer to the Application Note on the Surface Mount Assembly of Amkor’s Thermally/Electrically Enhance Leadframe Base Package, Amkor Technology.

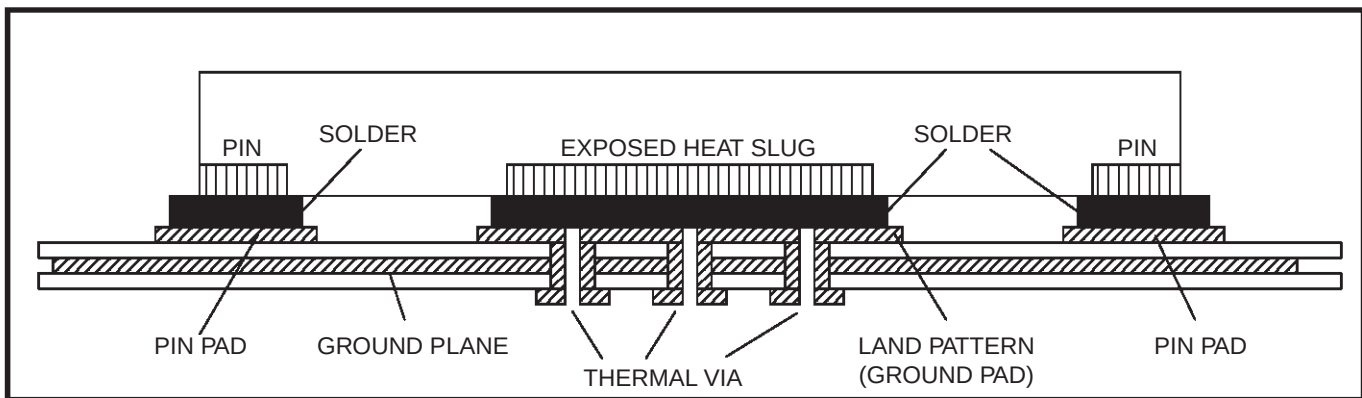

**Figure 2. P.C. Assembly for Exposed Pad Thermal Release Path – Side View (drawing not to scale)**



## Termination for 3.3V LVPECL Outputs

The clock layout topology shown below is a typical termination for LVPECL outputs. The two different layouts mentioned are recommended only as guidelines.

The differential outputs are low impedance follower outputs that generate ECL/LVPECL compatible outputs. Therefore, terminating resistors (DC current path to ground) or current sources must be used for functionality. These outputs are designed to drive 50Ω

transmission lines. Matched impedance techniques should be used to maximize operating frequency and minimize signal distortion.

*Figures 3A and 3B* show two different layouts which are recommended only as guidelines. Other suitable clock layouts may exist and it would be recommended that the board designers simulate to guarantee compatibility across all printed circuit and clock component process variations.

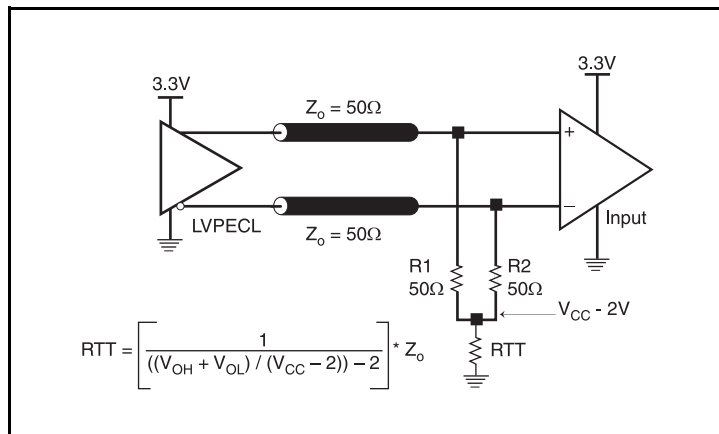


Figure 3A. 3.3V LVPECL Output Termination

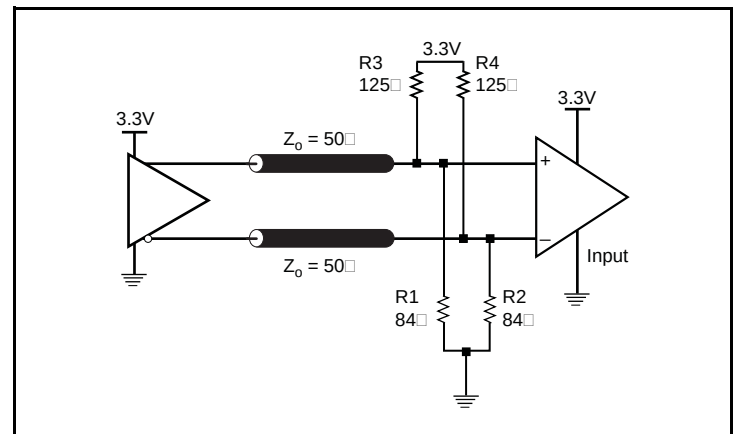


Figure 3B. 3.3V LVPECL Output Termination

## Recommendations for Unused Input and Output Pins

### Inputs:

#### REFCLK Input

For applications not requiring the use of the reference clock, it can be left floating. Though not required, but for additional protection, a 1kΩ resistor can be tied from the REFCLK to ground.

#### Crystal Inputs

For applications not requiring the use of the crystal oscillator input, both XTAL\_IN and XTAL\_OUT can be left floating. Though not required, but for additional protection, a 1kΩ resistor can be tied from XTAL\_IN to ground.

#### LVC MOS Control Pins

All control pins have internal pull-ups or pull-downs; additional resistance is not required but can be added for additional protection. A 1kΩ resistor can be used.

### Outputs:

#### LVC MOS Outputs

All unused LVC MOS output can be left floating. There should be no trace attached.

#### LVPECL Outputs:

All unused LVPECL outputs can be left floating. We recommend that there is no trace attached. Both sides of the differential output pair should either be left floating or terminated.

## Application Schematic Example

Figure 4 shows an example of 843N571I application schematic. In this example, the device is operated at  $V_{CC} = 3.3V$ . An 18pF parallel resonant 25MHz crystal is used. The load capacitance  $C1 = 15pF$  and  $C2 = 15pF$  are recommended for frequency accuracy. Depending on the parasitics of the printed circuit board layout, these values might require slight adjustment to optimize the frequency accuracy. Crystals with other load capacitance specifications can be used. This will require adjusting  $C1$  and  $C2$ . For this device, the crystal load capacitors are required for proper operation.

As with any high speed analog circuitry, the power supply pins are vulnerable to random noise. To achieve optimum jitter performance, power supply isolation is required. In order to achieve the best possible filtering, it is recommended that the placement of the filter components be on the device side of the PCB as close to the power pins as possible. If space is limited, the 0.1uF capacitor in each power pin filter should be placed on the device side. The other

components can be on the opposite side of the PCB.

Power supply filter recommendations are a general guideline to be used for reducing external noise from coupling into the devices. The filter performance is designed for wide range of noise frequency. This low-pass filter starts to attenuate noise at approximately 10kHz. If a specific frequency noise component with high amplitude interference is known, such as switching power supplies frequencies, it is recommended that component values be adjusted and if required, additional filtering be added. Additionally general design practice for power plane voltage stability suggests adding bulk capacitances in the general area of all devices.

The schematic example focuses on functional connections and is not configuration specific. Refer to the pin description and functional tables in the datasheet to ensure the logic control inputs are properly set.

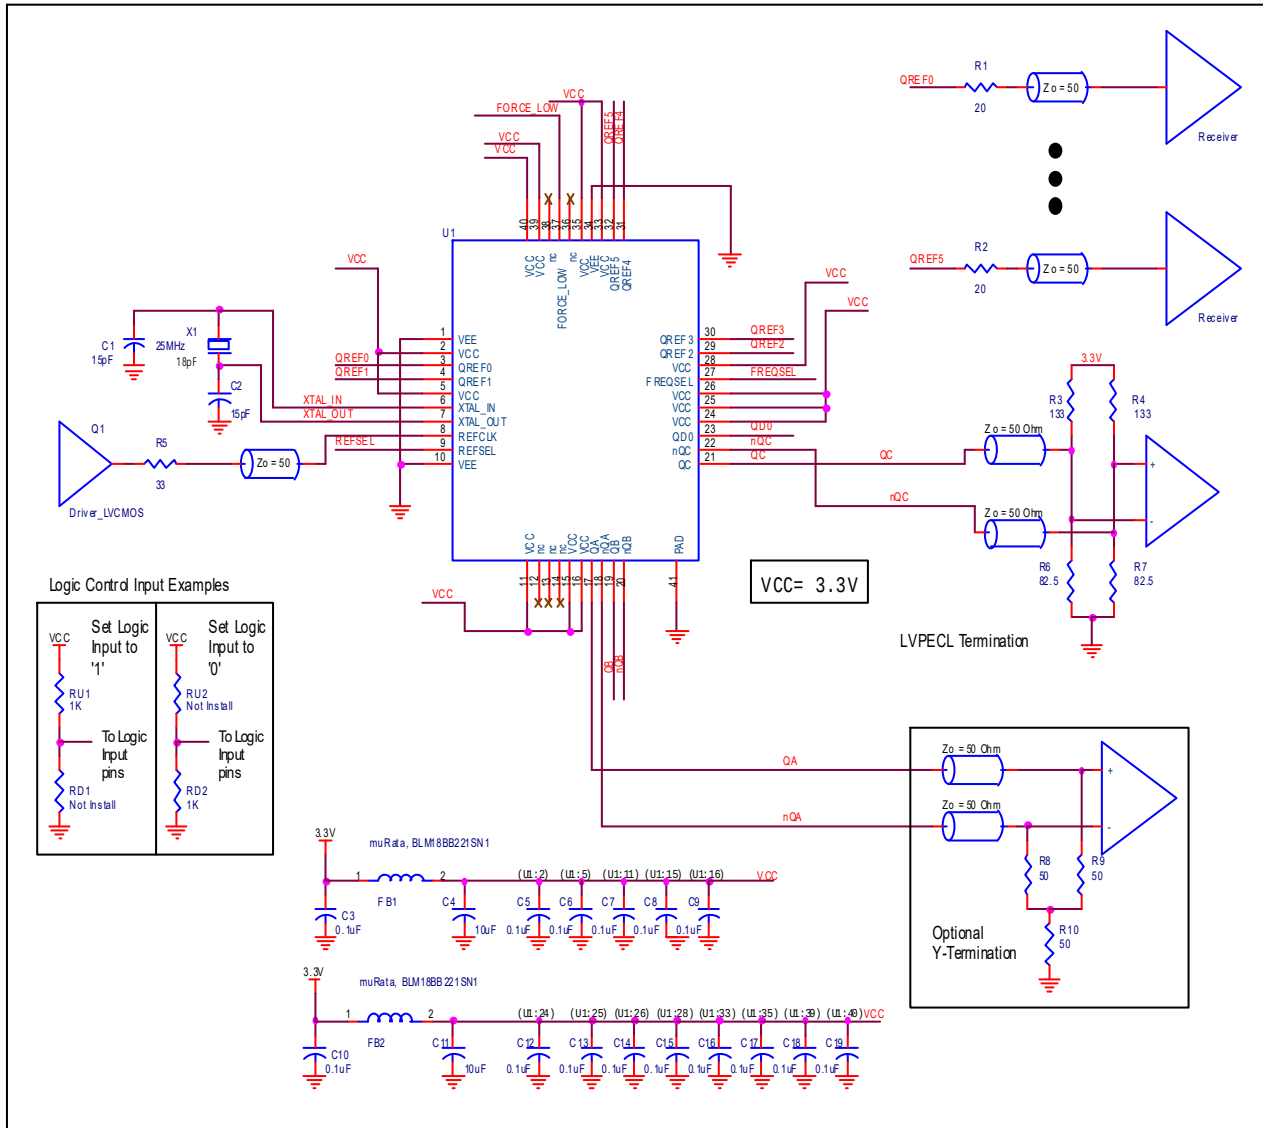


Figure 4. 843N571I Application Schematic

## Power Considerations

This section provides information on power dissipation and junction temperature for the 843N571I. Equations and example calculations are also provided.

### 1. Power Dissipation.

The total power dissipation for the 843N571I is the sum of the core power plus the power dissipated due to loading. The following is the power dissipation for  $V_{CC} = 3.6V$ , which gives worst case results.

NOTE: Please refer to Section 3 for details on calculating power dissipated due to loading.

#### Core and LVPECL Output Power Dissipation

- Power (core)<sub>MAX</sub> =  $V_{CC\_MAX} * I_{EE\_MAX} = 3.6V * 250mA = 900mW$
- Power (outputs)<sub>MAX</sub> = **32mW/Loaded Output pair**  
If all outputs are loaded, the total power is  $3 * 32mW = 96mW$

#### Dynamic Power Dissipation at 33.3333MHz and 25MHz

$$\begin{aligned} \text{Power (33.33MHz)} &= C_{PD} * \text{Frequency} * (V_{CC})^2 * \# \text{ of outputs} = 6pF * 33.3333MHz * (3.6V)^2 * 1 = \mathbf{2.592mW} \\ \text{Power (25MHz)} &= C_{PD} * \text{Frequency} * (V_{CC})^2 * \# \text{ of outputs} = 6pF * 25MHz * (3.6V)^2 * 6 = \mathbf{11.664mW} \end{aligned}$$

#### Total Power Dissipation

- Total Power**  
= Power (Core) + Power (Output) + Dynamic Power (33.3333MHz) + Dynamic Power (25MHz)  
=  $900mW + 96mW + 2.592mW + 11.66mW$   
= **1010.252mW**

### 2. Junction Temperature.

Junction temperature,  $T_J$ , is the temperature at the junction of the bond wire and bond pad, and directly affects the reliability of the device. The maximum recommended junction temperature is 125°C. Limiting the internal transistor junction temperature,  $T_J$ , to 125°C ensures that the bond wire and bond pad temperature remains below 125°C.

The equation for  $T_J$  is as follows:  $T_J = \theta_{JA} * P_{d\_total} + T_A$

$T_J$  = Junction Temperature

$\theta_{JA}$  = Junction-to-Ambient Thermal Resistance

$P_{d\_total}$  = Total Device Power Dissipation (example calculation is in section 1 above)

$T_A$  = Ambient Temperature

In order to calculate junction temperature, the appropriate junction-to-ambient thermal resistance  $\theta_{JA}$  must be used. Assuming no air flow and a multi-layer board, the appropriate value is 37.7°C/W per Table 7 below.

Therefore,  $T_J$  for an ambient temperature of 85°C with all outputs switching is:

$$85^\circ C + 1.010W * 37.7^\circ C/W = 123.1^\circ C. \text{ This is below the limit of } 125^\circ C.$$

This calculation is only an example.  $T_J$  will obviously vary depending on the number of loaded outputs, supply voltage, air flow and the type of board (multi-layer).


**Table 7. Thermal Resistance  $\theta_{JA}$  for 40 Lead VFQFN Forced Convection**

| $\theta_{JA}$ by Velocity                   |          |          |          |
|---------------------------------------------|----------|----------|----------|
| Meters per Second                           | 0        | 1        | 2.5      |
| Multi-Layer PCB, JEDEC Standard Test Boards | 37.7°C/W | 31.6°C/W | 28.8°C/W |

### 3. Calculations and Equations.

The purpose of this section is to calculate the power dissipation for the LVPECL output pairs.

LVPECL output driver circuit and termination are shown in *Figure 5*.

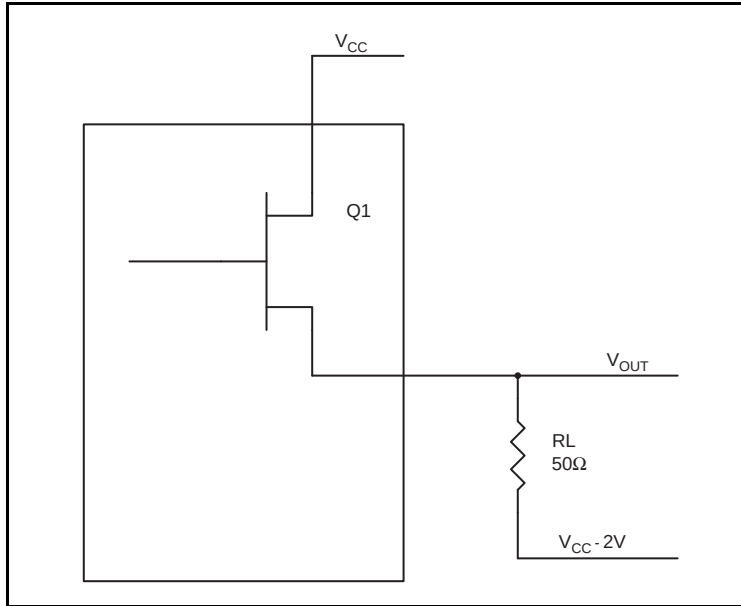

**Figure 5. LVPECL Driver Circuit and Termination**

To calculate power dissipation due to loading, use the following equations which assume a 50Ω load, and a termination voltage of  $V_{CC} - 2V$ .

- For logic high,  $V_{OUT} = V_{OH\_MAX} = V_{CC\_MAX} - 0.8V$   
( $V_{CC\_MAX} - V_{OH\_MAX}$ ) = **0.8V**
- For logic low,  $V_{OUT} = V_{OL\_MAX} = V_{CC\_MAX} - 1.6V$   
( $V_{CC\_MAX} - V_{OL\_MAX}$ ) = **1.6V**
- 

$Pd\_H$  is power dissipation when the output drives high.

$Pd\_L$  is the power dissipation when the output drives low.

$$Pd\_H = [(V_{OH\_MAX} - (V_{CC\_MAX} - 2V))/R_L] * (V_{CC\_MAX} - V_{OH\_MAX}) = [(2V - (V_{CC\_MAX} - V_{OH\_MAX}))/R_L] * (V_{CC\_MAX} - V_{OH\_MAX}) = [(2V - 0.8V)/50\Omega] * 0.8V = \mathbf{19.2mW}$$

$$Pd\_L = [(V_{OL\_MAX} - (V_{CC\_MAX} - 2V))/R_L] * (V_{CC\_MAX} - V_{OL\_MAX}) = [(2V - (V_{CC\_MAX} - V_{OL\_MAX}))/R_L] * (V_{CC\_MAX} - V_{OL\_MAX}) = [(2V - 1.6V)/50\Omega] * 1.6V = \mathbf{12.8mW}$$

$$\text{Total Power Dissipation per output pair} = Pd\_H + Pd\_L = \mathbf{32mW}$$

## Reliability Information

**Table 8.  $\theta_{JA}$  vs. Air Flow Table for a 40 Lead VFQFN**

| $\theta_{JA}$ vs. Air Flow                  |          |          |          |
|---------------------------------------------|----------|----------|----------|
| Meters per Second                           | 0        | 1        | 2.5      |
| Multi-Layer PCB, JEDEC Standard Test Boards | 37.7°C/W | 31.6°C/W | 28.8°C/W |

## Transistor Count

The transistor count for 843N571I is: 22,466

## Package Outline Drawings

The package outline drawings are appended at the end of this document and are accessible from the link below. The package information is the most current data available.

[www.idt.com/document/psc/nlnlg-40-package-outline-60-x-60-mm-body-epad-290-x-290-mm-qfn](http://www.idt.com/document/psc/nlnlg-40-package-outline-60-x-60-mm-body-epad-290-x-290-mm-qfn)

## Ordering Information

**Table 10. Ordering Information**

| Part/Order Number | Marking      | Package                   | Shipping Packaging | Temperature   |
|-------------------|--------------|---------------------------|--------------------|---------------|
| 843N571BKILF      | ICS43N571BIL | "Lead-Free" 40 Lead VFQFN | Tray               | -40°C to 85°C |
| 843N571BKILFT     | ICS43N571BIL | "Lead-Free" 40 Lead VFQFN | Tape & Reel        | -40°C to 85°C |

## Revision History

| Revision Date                                | Description of Change                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| November 29, 2018                            | Updated description of Absolute Maximum Ratings; also added $T_{J,MAX}$ to the table<br>Added Recommended Operating Conditions<br>Updated Package Outline Drawings; however, no technical changes                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| April 20, 2016                               | Removed ICS from the part number where needed.<br>Updated data sheet header and footer.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| October 4, 2013                              | PCN #N1302-03_RTB expired.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| PCN<br>Expiration<br>Date<br>August 16, 2013 | PCN Expiration Period extended to 8/16/2013.<br>Front Page, updated PCN Notification Period.<br>Corrected block diagram.<br>Pin Description Table - showed rest of QREFx pin names.<br>Absolute Maximum Ratings - XTAL_IN input rating, changed from $V_{CC}$ to 2V.<br>LVCMOS DC Characteristics Table - add units to $V_{IH}$ .<br>AC Characteristics Table - changed $f_{OUT}$ min. spec from 25MHz to 100MHz.<br>AC Tables - corrected TA temperature from -25°C to 25°C.<br>Power Considerations - added missing Power Output to Total Power Calculation.<br>Revision History Sheet - changed Date column to the extended PCN date. |
| May 20, 2013                                 | $f_{OUT}$ Minimum = 100MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| April 3, 2013                                | PCN N1302-03 Notification Period Expires 5/28/2013<br>Part/Order Number: 843N571BKILF, 843N571BKILFT<br>Marking: ICS43N571BIL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |



Corporate Headquarters  
6024 Silver Creek Valley Road  
San Jose, CA 95138 USA  
[www.IDT.com](http://www.IDT.com)

Sales  
1-800-345-7015 or 408-284-8200  
Fax: 408-284-2775  
[www.IDT.com/go/sales](http://www.IDT.com/go/sales)


Tech Support  
[www.idt.com/go/support](http://www.idt.com/go/support)

DISCLAIMER Integrated Device Technology, Inc. (IDT) and its affiliated companies (herein referred to as "IDT") reserve the right to modify the products and/or specifications described herein at any time, without notice, at IDT's sole discretion. Performance specifications and operating parameters of the described products are determined in an independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of IDT's products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of IDT or any third parties.


IDT's products are not intended for use in applications involving extreme environmental conditions or in life support systems or similar devices where the failure or malfunction of an IDT product can be reasonably expected to significantly affect the health or safety of users. Anyone using an IDT product in such a manner does so at their own risk, absent an express, written agreement by IDT.

Integrated Device Technology, IDT and the IDT logo are trademarks or registered trademarks of IDT and its subsidiaries in the United States and other countries. Other trademarks used herein are the property of IDT or their respective third party owners. For datasheet type definitions and a glossary of common terms, visit [www.idt.com/go/glossary](http://www.idt.com/go/glossary). Integrated Device Technology, Inc All rights reserved.

| REVISIONS |                 |         |          |
|-----------|-----------------|---------|----------|
| REV       | DESCRIPTION     | DATE    | APPROVED |
| 00        | INITIAL RELEASE | 02/4/16 | JH       |

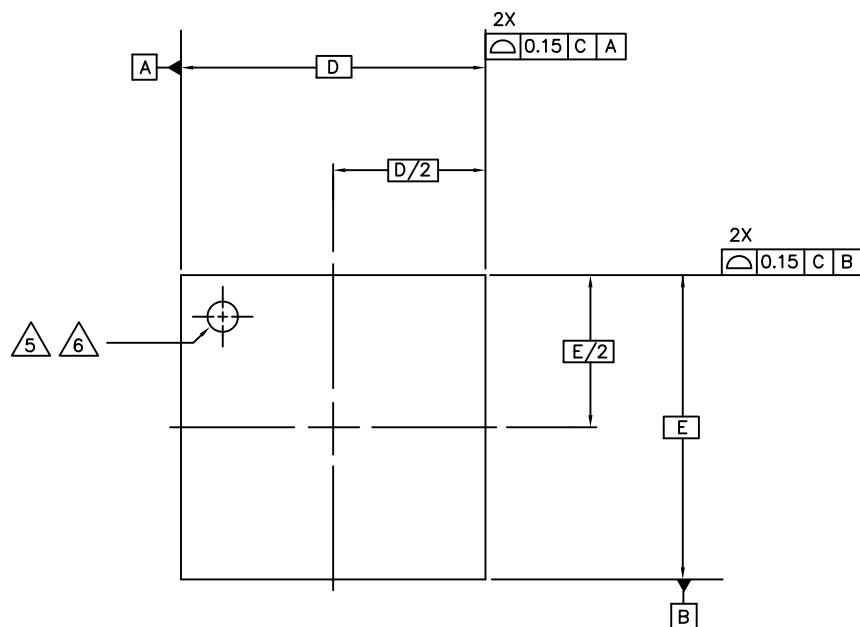


TOP VIEW


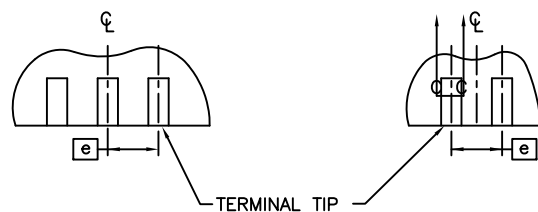


FOR ODD TERMINAL/SIDE


FOR EVEN TERMINAL/SIDE

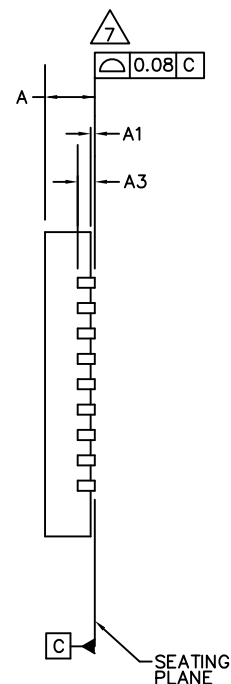

SIDE VIEW

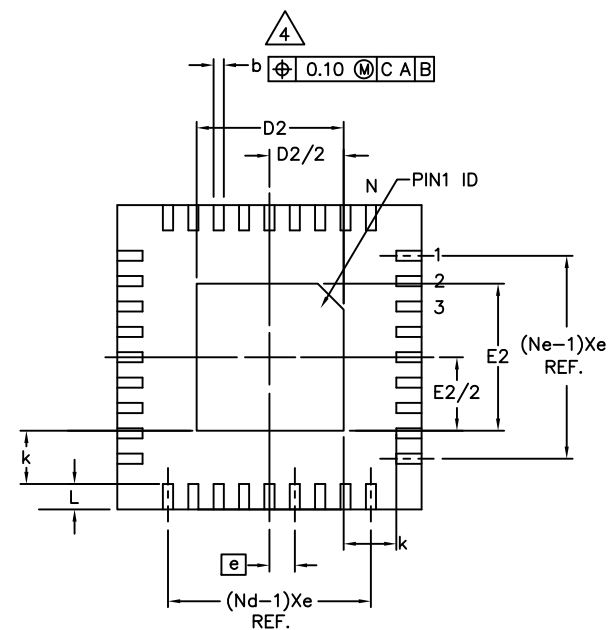

BOTTOM VIEW

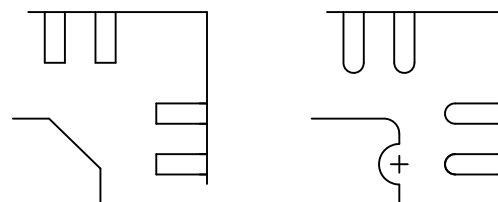

PIN #1 ID AND TIE BAR MARK OPTION

|                                |         |                                                                                                                                                                                                                                                         |  |
|--------------------------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| TOLERANCES<br>UNLESS SPECIFIED |         |  <b>IDT™</b><br>6024 SILVERCREEK VALLEY ROAD<br>SAN JOSE, CA 95138<br>PHONE: (408) 284-8200<br>FAX: (408) 284-8591<br><a href="http://www.IDT.com">www.IDT.com</a> |  |
| DECIMAL                        | ANGULAR |                                                                                                                                                                                                                                                         |  |
| XX±                            | ±       | <b>TITLE</b> NL/NLG 40 PACKAGE OUTLINE<br>6.0 X 6.0 mm BODY<br>EPAD 2.90 x 2.90 mm QFN                                                                                                                                                                  |  |
| XXX±                           |         |                                                                                                                                                                                                                                                         |  |
| XXXX±                          |         | <b>SIZE</b> C<br><b>DRAWING No.</b> PSC-4115-01<br><b>REV</b> 00                                                                                                                                                                                        |  |
| APPROVALS                      | DATE    |                                                                                                                                                                                                                                                         |  |
| DRAWN <i>RAC</i>               | 02/4/16 | DO NOT SCALE DRAWING                                                                                                                                                                                                                                    |  |
| CHECKED                        |         |                                                                                                                                                                                                                                                         |  |
|                                |         | SHEET 1 OF 3                                                                                                                                                                                                                                            |  |



| REVISIONS |                 |         |          |
|-----------|-----------------|---------|----------|
| REV       | DESCRIPTION     | DATE    | APPROVED |
| 00        | INITIAL RELEASE | 02/4/16 | JH       |



## NOTES:

1. DIMENSIONING & TOLERANCING CONFORM TO ASME Y14.5M. – 1994.
2. N IS THE NUMBER OF TERMINALS.  
Nd IS THE NUMBER OF TERMINALS IN X-DIRECTION &  
Ne IS THE NUMBER OF TERMINALS IN Y-DIRECTION.
3. ALL DIMENSIONS ARE IN MILLIMETERS.
4. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.20 AND 0.30mm FROM TERMINAL TIP.
5. THE PIN #1 IDENTIFIER MUST EXIST ON THE TOP SURFACE OF THE PACKAGE BY USING INDENTATION MARK OR OTHER FEATURE OF PACKAGE BODY.
6. EXACT SHAPE AND SIZE OF THIS FEATURE IS OPTIONAL.
7. APPLIED TO EXPOSED PAD AND TERMINALS. EXCLUDE EMBEDDED PART OF EXPOSED PAD FROM MEASURING.
8. APPLIED ONLY FOR TERMINALS.
9. THIS OUTLINES CONFORMS TO JEDEC PUBLICATION 95 REGISTRATION MO-220, VARIATION VJJC-3 & VJJD-5 WITH THE EXCEPTION OF D2 & E2.

| SYMBOL | DIMENSION |      |      | NOTE |
|--------|-----------|------|------|------|
|        | MIN       | NOM  | MAX  |      |
| b      | 0.18      | 0.25 | 0.30 | 4    |
| D      | 6.00 BSC  |      |      |      |
| E      | 6.00 BSC  |      |      |      |
| D2     | 2.80      | 2.90 | 3.00 |      |
| E2     | 2.80      | 2.90 | 3.00 |      |
| L      | 0.30      | 0.40 | 0.50 |      |
| e      | 0.50 BSC  |      |      |      |
| k      | 1.15 REF. |      |      | 2    |
| N      | 40        |      |      |      |
| A      | 0.80      | 0.90 | 1.00 |      |
| A1     | 0.00      | 0.02 | 0.05 | 7    |
| A3     | 0.2 REF   |      |      |      |
| Nd     | 10        |      |      | 2    |
| Ne     | 10        |      |      | 2    |

|                                |         |                                                                                                                  |             |                                                                                                      |              |
|--------------------------------|---------|------------------------------------------------------------------------------------------------------------------|-------------|------------------------------------------------------------------------------------------------------|--------------|
| TOLERANCES<br>UNLESS SPECIFIED |         |  <b>IDT™</b><br>www.IDT.com |             | 6024 SILVERCREEK<br>VALLEY ROAD<br>SAN JOSE CA 95138<br>PHONE: (408) 284-8200<br>FAX: (408) 284-8591 |              |
| DECIMAL                        | ANGULAR |                                                                                                                  |             |                                                                                                      |              |
| XX±                            | ±       |                                                                                                                  |             |                                                                                                      |              |
| XXX±                           |         |                                                                                                                  |             |                                                                                                      |              |
| XXXX±                          |         |                                                                                                                  |             |                                                                                                      |              |
| APPROVALS                      | DATE    | TITLE NL/NLG 40 PACKAGE OUTLINE                                                                                  |             |                                                                                                      |              |
| DRAWN <i>RdC</i>               | 02/4/16 | 6.0 X 6.0 mm BODY                                                                                                |             |                                                                                                      |              |
| CHECKED                        |         | EPAD 2.90 x 2.90 mm QFN                                                                                          |             |                                                                                                      |              |
|                                |         | SIZE                                                                                                             | DRAWING No. | REV                                                                                                  |              |
|                                |         | C                                                                                                                | PSC-4115-01 | 00                                                                                                   |              |
|                                |         | DO NOT SCALE DRAWING                                                                                             |             |                                                                                                      | SHEET 2 OF 3 |

| REVISIONS |                 |         |          |
|-----------|-----------------|---------|----------|
| REV       | DESCRIPTION     | DATE    | APPROVED |
| 00        | INITIAL RELEASE | 02/4/16 | JH       |

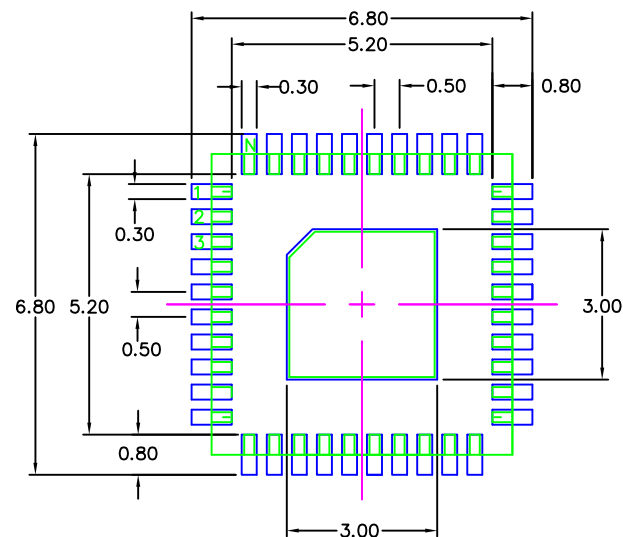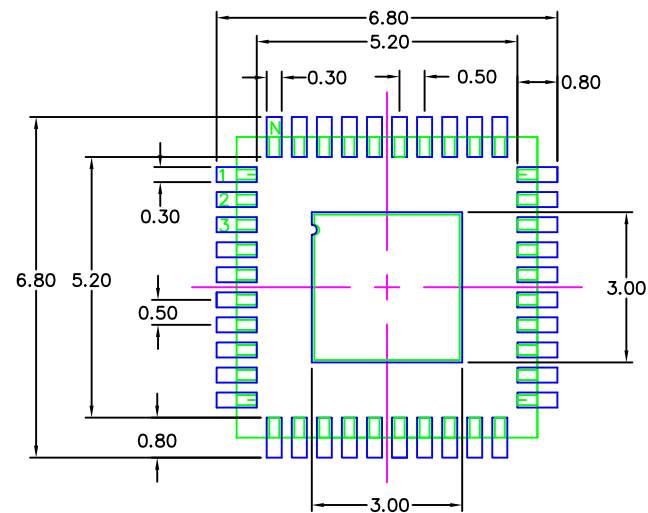

RECOMMENDED LAND PATTERN

#### NOTES:

1. ALL DIMENSIONS ARE IN mm. ANGLES IN DEGREES.
2. TOP DOWN VIEW. AS VIEWED ON PCB.
3. COMPONENT OUTLINE SHOWS FOR REFERENCE IN GREEN.
4. LAND PATTERN IN BLUE. NSMD PATTERN ASSUMED.
5. LAND PATTERN RECOMMENDATION PER IPC-7351B GENERIC REQUIREMENT FOR SURFACE MOUNT DESIGN AND LAND PATTERN.

|                                |         |                                                                                                                                                                                                         |                                |
|--------------------------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
| TOLERANCES<br>UNLESS SPECIFIED |         |  <b>IDT™</b><br>6024 SILVERCREEK VALLEY ROAD<br>SAN JOSE CA, 95138<br>PHONE: (408) 284-8200<br>FAX: (408) 284-8591 |                                |
| DECIMAL                        | ANGULAR |                                                                                                                                                                                                         |                                |
| XX±                            | ±       | www.IDT.com<br><b>TITLE</b> NL/NLG 40 PACKAGE OUTLINE<br>6.0 X 6.0 mm BODY<br>EPAD 2.90 x 2.90 mm QFN                                                                                                   |                                |
| XXX±                           |         |                                                                                                                                                                                                         |                                |
| XXXX±                          |         | <b>APPROVALS</b><br>DRAWN <i>RAC</i> DATE 02/4/16<br>CHECKED                                                                                                                                            |                                |
|                                |         |                                                                                                                                                                                                         |                                |
|                                |         | SIZE <b>C</b>                                                                                                                                                                                           | DRAWING No. <b>PSC-4115-01</b> |
|                                |         |                                                                                                                                                                                                         | REV <b>00</b>                  |
|                                |         | DO NOT SCALE DRAWING                                                                                                                                                                                    |                                |
|                                |         | SHEET 3 OF 3                                                                                                                                                                                            |                                |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9