

LOW VOLTAGE HCMOS SURFACE-MOUNT CRYSTAL CLOCK OSCILLATOR

ASD SERIES



RoHS
Compliant



2.5 X 2.0 X 0.95 mm

FEATURES:

- Low height 0.95mm max
- Low current consumption
- Tri-state function
- Suitable for RoHS compliant reflow
- Tight stability option
- Seam sealed package assures high reliability

APPLICATIONS:

- CCD clock for VTR Camera
- Equipment connected to PC or PC cards
- Thin equipment

STANDARD SPECIFICATIONS:

Parameters		Minimum	Typical	Maximum	Units	Notes
Frequency Range		0.750	-----	75	MHz	
Operating Temperature		-20	-----	+70	°C	STD temp. Option code E (See options)
Storage Temperature		-55	-----	+100	°C	
Overall Frequency Stability		-100	-----	+100	ppm	See options
Supply Voltage (Vdd)		+3.135	+3.3	+3.465	V	ASD (Standard)
		+2.85	+3.0	+3.15		ASD1
		+2.375	+2.5	+2.625		ASD2
		+1.71	+1.8	+1.89		ASD3
		+0.95	+1.0	+1.05		ASD6
Input Current (Idd)	ASD (3.3V)	-----	2.5	5	mA	0.750~15.999 MHz
		-----	4	7		16.000~39.999 MHz
		-----	9	13		40.000~66.666 MHz
	ASD1 (3.0V)	-----	2.5	4	mA	0.750~15.999 MHz
		-----	3.5	6		16.000~39.999 MHz
		-----	8	12		40.000~66.666 MHz
	ASD2 (2.5V)	-----	2	3.5	mA	0.750~15.999 MHz
		-----	3	5		16.000~39.999 MHz
		-----	7	10		40.000~66.666 MHz
	ASD3 (1.8V)	-----	1	2.5	mA	0.750~15.999 MHz
		-----	2	4		16.000~39.999 MHz
		-----	4	7		40.000~66.666 MHz
	ASD6 (1.0V)	-----	1.0	2.5	mA	25.000 MHz
Symmetry @ 1/2Vdd		40	-----	60	%	STD (See option)
Output Load:		-----	-----	15	pF	CMOS
Output Voltage (VOH):		0.9* Vdd	-----	-----	V	
Output Voltage (VOL):		-----	-----	0.1* Vdd	V	



LOW VOLTAGE HCMOS SURFACE-MOUNT CRYSTAL CLOCK OSCILLATOR

ASD SERIES



RoHS
Compliant



2.5 X 2.0 X 0.8mm

STANDARD SPECIFICATIONS... continued:

Parameters		Minimum	Typical	Maximum	Units	Notes
Rise and Fall Time (Tr/Tf):	ASD (3.3V)	----	3	7	ns	0.750~15.999 MHz
		----	2.5	6		16.000~39.999 MHz
		----	2	4		40.000~66.666 MHz
	ASD1 (3.0V)	----	3	7	ns	0.750~15.999 MHz
		----	2.5	6		16.000~39.999 MHz
		----	2	4		40.000~66.666 MHz
	ASD2 (2.5V)	----	4	8	ns	0.750~15.999 MHz
		----	3	7		16.000~39.999 MHz
		----	2.5	5		40.000~66.666 MHz
	ASD3 (1.8V)	----	5	10	ns	0.750~15.999 MHz
		----	3.5	8		16.000~39.999 MHz
		----	3	6		40.000~66.666 MHz
	ASD6 (1.0V)	----	1.9	6.0	ns	25.000 MHz
Start-up Time:	ASD (3.3V)	----	6	10	ms	0.750~15.999 MHz
		----	6	10		16.000~39.999 MHz
		----	5	10		40.000~66.666 MHz
	ASD1 (3.0V)	----	6	10	ms	0.750~15.999 MHz
		----	6	10		16.000~39.999 MHz
		----	5	10		40.000~66.666 MHz
	ASD2 (2.5V)	----	6	10	ms	0.750~15.999 MHz
		----	6	10		16.000~39.999 MHz
		----	5	10		40.000~66.666 MHz
	ASD3 (1.8V)	----	6	10	ms	0.750~15.999 MHz
		----	6	10		16.000~39.999 MHz
		----	5	10		40.000~66.666 MHz
	ASD6 (1.0V)	----	2.0	10	ms	25.000 MHz
Tri-state function (Stand-by) :		"1" (VIH≥0.7*Vdd) or Open: Oscillation; "0" (VIH<0.3*Vdd) : No oscillation/Hi Z				
Phase Jitter (12kHz to 20MHz)	ASD (3.3V)	----	0.4	1.0	ps	0.750~15.999 MHz
		----	0.4	1.0		16.000~39.999 MHz
		----	0.3	1.0		40.000~66.666 MHz
	ASD1 (3.0V)	----	0.4	1.0	ps	0.750~15.999 MHz
		----	0.4	1.0		16.000~39.999 MHz
		----	0.3	1.0		40.000~66.666 MHz
	ASD2 (2.5V)	----	0.5	1.0	ps	0.750~15.999 MHz
		----	0.5	1.0		16.000~39.999 MHz
		----	0.5	1.0		40.000~66.666 MHz
	ASD3 (1.8V)	----	0.5	1.0	ps	0.750~15.999 MHz
		----	0.5	1.0		16.000~39.999 MHz
		----	0.5	1.0		40.000~66.666 MHz
	ASD6 (1.0V)	----	0.3	1.0	ps	25.000 MHz
Period Jitter RMS	ASD (3.3V)	----	3.0	5.0	ps	0.750~15.999 MHz
		----	3.0	5.0		16.000~39.999 MHz
		----	3.0	5.0		40.000~66.666 MHz
	ASD1 (3.0V)	----	3.0	5.0	ps	0.750~15.999 MHz
		----	3.0	5.0		16.000~39.999 MHz
		----	3.0	5.0		40.000~66.666 MHz
	ASD2 (2.5V)	----	3.0	5.0	ps	0.750~15.999 MHz
		----	3.0	5.0		16.000~39.999 MHz
		----	3.0	5.0		40.000~66.666 MHz
	ASD3 (1.8V)	----	3.0	5.0	ps	0.750~15.999 MHz
		----	3.0	5.0		16.000~39.999 MHz
		----	3.0	5.0		40.000~66.666 MHz
	ASD6 (1.0V)	----	4.8	6.0	ps	25.000 MHz
Aging at 25°C/year		-5	----	+5	ppm	
Disable Current:		----	----	10	μA	



Pb

2.5 X 2.0 X 0.8mm

(Left blank if standard)



Packaging
Blank: Bulk
T: 1000pcs/Reel
T2: 250pcs/Reel
T3: 3000pcs/Reel

Operating Temp.
E: -20°C ~ +70°C (STD)
F: -30°C ~ +70°C
N: -30°C ~ +85°C
L: -40°C ~ +85°C
M(***): -40°C ~ +105°C
V(***): -40°C ~ +125°C

Overall Freq. Stability
J(*): $\pm 20\text{ppm}$
R(**): $\pm 25\text{ppm}$
K: $\pm 30\text{ppm}$
H: $\pm 35\text{ppm}$
C: $\pm 50\text{ppm}$

Duty Cycle
Blank : 40/60% @ 1/2Vdd
S: 45/55% @ 1/2Vdd

*: Standard only
 **: E, F, N, and L only
 ***: ± 100 ppm only

Technical drawing of a rectangular component with dimensions in millimeters.

Top View:

- Overall width: 0.098 ± 0.004 (2.5 ± 0.1)
- Overall height: 0.079 ± 0.004 (2.0 ± 0.1)
- Corner radii: 0.015 and 0.037
- Labels: 1, 2, 3, 4


Side View:

- Overall thickness: 0.037 max (0.95 max)
- Central hole diameter: 0.015

Bottom View:

- Overall width: 0.037 (0.95)
- Overall height: 0.0267 (0.68)
- Corner radii: 0.025 (0.65) and 0.03 (0.78)
- Labels: 1, 2, 3, 4

Recommended land pattern

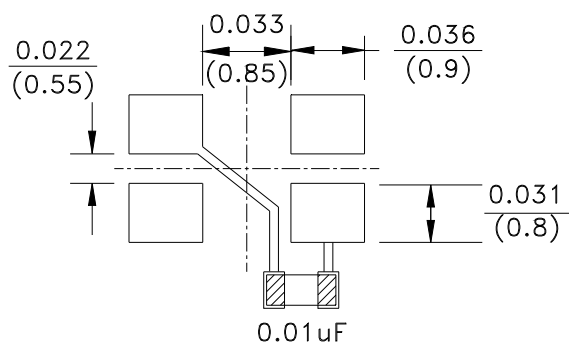

PIN	FUNCTION
1	Tri-State (STBY)
2	GND/Case
3	Output
4	Vdd

Note1: Recommend using an approximately 0.01uF bypass capacitor between PIN 2 and 4.

Dimensions: inches (mm)

LOW VOLTAGE HCMOS SURFACE-MOUNT CRYSTAL CLOCK OSCILLATOR

ASD SERIES




RoHS
Compliant



2.5 X 2.0 X 0.8mm


TAPE & REEL:

T: 1000pcs/reel
T2: 250pcs/reel
T3: 3000pcs/reel

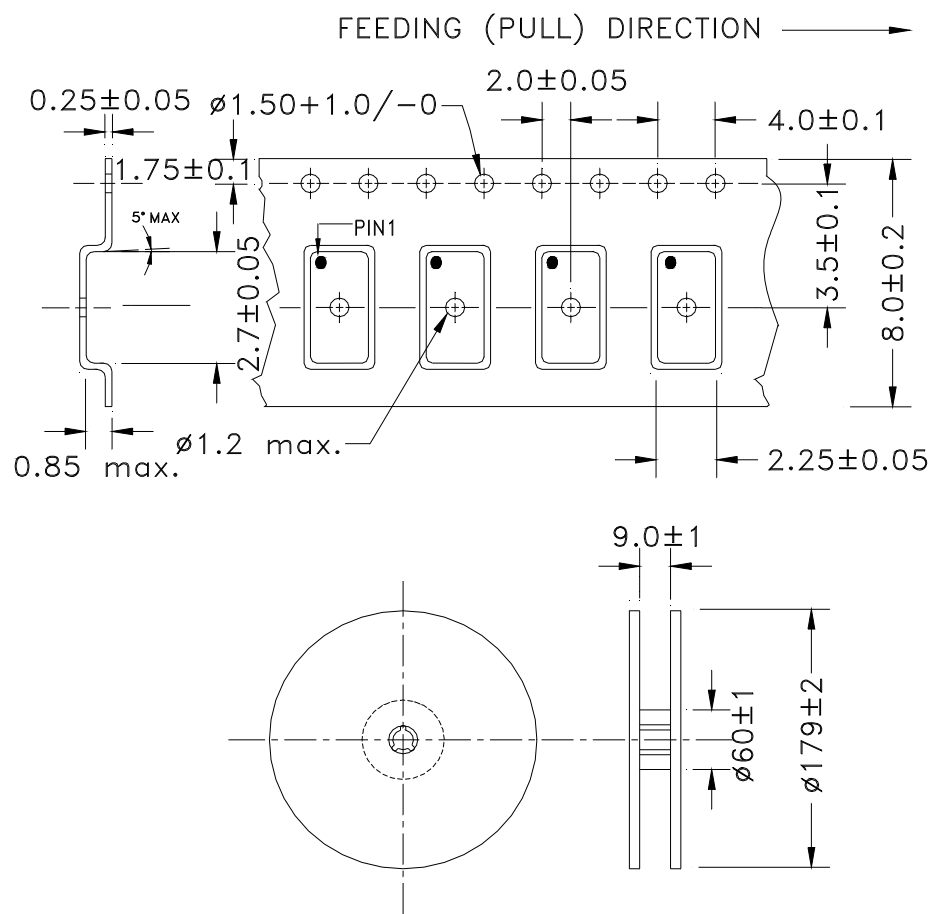

Dimensions: mm

REFLOW PROFILE:

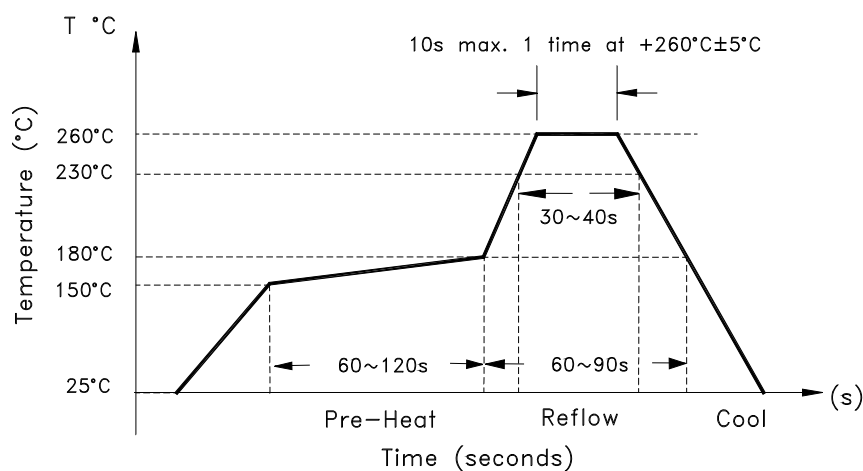

Need a test socket for the ASD Series? To view compatible **PRECISION TEST & BURN-IN SOCKETS** for these parts, [click here. P/N AXS-2520-04-01](#)

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS
ISO9001:2008
CERTIFIED



ABRACON
CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale **Revised: 04.29.11**
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9