

## Surge protection device - LIT 2X1-24 - 2804636

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Surge protection in one-piece 6.2 mm wide DIN rail module for two conductors with common reference potential.

### Product Features

- ✓ Can be used in binary, analog, and intrinsically safe circuits
- ✓ Protection of up to four signal wires over a design width of 6.2 mm



### Key commercial data

|                                      |          |
|--------------------------------------|----------|
| Packing unit                         | 1 1      |
| Weight per Piece (excluding packing) | 54.0 GRM |
| Custom tariff number                 | 85363010 |
| Country of origin                    | Germany  |

### Technical data

#### Dimensions

|        |          |
|--------|----------|
| Height | 93 mm    |
| Width  | 6.2 mm   |
| Depth  | 102.5 mm |

#### Ambient conditions

|                                         |                  |
|-----------------------------------------|------------------|
| Ambient temperature (operation)         | -40 °C ... 80 °C |
| Ambient temperature (storage/transport) | -40 °C ... 80 °C |
| Degree of protection                    | IP20             |

#### General

|                  |     |
|------------------|-----|
| Housing material | PBT |
|------------------|-----|

# Surge protection device - LIT 2X1-24 - 2804636

## Technical data

### General

|                                          |                                  |
|------------------------------------------|----------------------------------|
| Inflammability class according to UL 94  | V0                               |
| Color                                    | black                            |
| Standards for air and creepage distances | IEC 60664-1                      |
| Mounting type                            | DIN rail: 35 mm                  |
| Design                                   | Rail-mountable module, one-piece |
| Direction of action                      | Line-Earth Ground                |

### Protective circuit

|                                                                      |                                       |
|----------------------------------------------------------------------|---------------------------------------|
| IEC test classification                                              | C1                                    |
|                                                                      | C2                                    |
|                                                                      | C3                                    |
|                                                                      | D1                                    |
| Nominal voltage $U_N$                                                | 24 V DC                               |
| Maximum continuous operating voltage $U_C$                           | 25 V AC                               |
|                                                                      | 36 V DC                               |
| Nominal current $I_N$                                                | 350 mA (40°C)                         |
| Operating effective current $I_C$ at $U_C$                           | $\leq 2 \mu A$                        |
| Residual current $I_{PE}$                                            | $\leq 4 \mu A$                        |
| Nominal discharge current $I_n$ (8/20) $\mu s$ (Core-Earth)          | 5 kA                                  |
|                                                                      | 10 kA ((Total))                       |
| Total surge current (8/20) $\mu s$                                   | 20 kA                                 |
| Total surge current (10/350) $\mu s$                                 | 1 kA                                  |
| Max. discharge current $I_{max}$ (8/20) $\mu s$ maximum (Core-Earth) | 10 kA                                 |
|                                                                      | 20 kA ((Total))                       |
| Nominal pulse current $I_{an}$ (10/1000) $\mu s$ (Core-Earth)        | 50 A                                  |
|                                                                      | 100 A ((Total))                       |
| Impulse discharge current (10/350) $\mu s$ , peak value $I_{imp}$    | 500 A                                 |
| Output voltage limitation at 1 kV/ $\mu s$ (Core-Earth) spike        | $\leq 60 V$                           |
| Residual voltage at $I_n$ , (conductor-ground)                       | $\leq 50 V$                           |
| Residual voltage with $I_{an}$ (10/1000) $\mu s$ (conductor-ground)  | $\leq 60 V$                           |
| Voltage protection level $U_p$ (Core-Earth)                          | $\leq 60 V$ (C1 - 500 V / 250 A)      |
|                                                                      | $\leq 95 V$ (C2 - 10 kV / 5 kA)       |
|                                                                      | $\leq 60 V$ (C3 - 10 A)               |
| Response time $t_A$ (Core-Earth)                                     | $\leq 1 ns$                           |
| Input attenuation $a_E$ , asym.                                      | typ. 0.3 dB (1 MHz / 50 $\Omega$ )    |
|                                                                      | typ. 0.2 dB (350 kHz / 150 $\Omega$ ) |
| Cut-off frequency $f_g$ (3 dB), asym. (PE) in 50 Ohm system          | typ. 6 MHz                            |

# Surge protection device - LIT 2X1-24 - 2804636

## Technical data

### Protective circuit

|                                                                              |                             |
|------------------------------------------------------------------------------|-----------------------------|
| Cut-off frequency $f_g$ (3 dB), asym. (PE) in 150 Ohm system                 | typ. 2 MHz                  |
| Capacity                                                                     | $\leq 1.3$ nF (per channel) |
| Resistance in series                                                         | $3.3 \Omega$ 20 %           |
| Max. required back-up fuse                                                   | 315 mA                      |
| Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)               | C2 (10 kV/5 kA)             |
|                                                                              | C3 (25 A)                   |
|                                                                              | D1 (500 A)                  |
| Alternating current carrying capacity in acc. with IEC 61643-21 (Core-Earth) | 5 A - 1 s                   |

### Connection data

|                                        |                       |
|----------------------------------------|-----------------------|
| Connection method                      | Screw connection      |
| Connection type IN                     | Screw terminal blocks |
| Connection type OUT                    | Screw terminal blocks |
| Screw thread                           | M3                    |
| Conductor cross section stranded min.  | 0.2 mm <sup>2</sup>   |
| Conductor cross section stranded max.  | 2.5 mm <sup>2</sup>   |
| Conductor cross section solid min.     | 0.14 mm <sup>2</sup>  |
| Conductor cross section solid max.     | 2.5 mm <sup>2</sup>   |
| Conductor cross section AWG/kcmil min. | 26                    |
| Conductor cross section AWG/kcmil max  | 12                    |

### Connection, equipotential bonding

|                   |               |
|-------------------|---------------|
| Connection method | DIN rail NS35 |
|-------------------|---------------|

### Standards and Regulations

|                       |                 |
|-----------------------|-----------------|
| Standards/regulations | IEC 61643-21    |
|                       | DIN EN 61643-21 |

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27140201 |
| eCl@ss 4.1 | 27130801 |
| eCl@ss 5.0 | 27130801 |
| eCl@ss 5.1 | 27130801 |
| eCl@ss 6.0 | 27130807 |
| eCl@ss 7.0 | 27130807 |
| eCl@ss 8.0 | 27130807 |

## Surge protection device - LIT 2X1-24 - 2804636

### Classifications

#### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC000943 |
| ETIM 3.0 | EC000943 |
| ETIM 4.0 | EC000943 |
| ETIM 5.0 | EC000943 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30212010 |
| UNSPSC 7.0901 | 39121610 |
| UNSPSC 11     | 39121610 |
| UNSPSC 12.01  | 39121610 |
| UNSPSC 13.2   | 39121620 |

### Approvals

#### Approvals

Approvals

UL Listed / GL

Ex Approvals

Approvals submitted

#### Approval details

|                                                                                               |
|-----------------------------------------------------------------------------------------------|
| UL Listed  |
|-----------------------------------------------------------------------------------------------|

|    |
|----|
| GL |
|----|

### Accessories

Accessories

Terminal marking

## Surge protection device - LIT 2X1-24 - 2804636

### Accessories

#### Marker for terminal blocks - UC-TM 6 - 0818085



Marker for terminal blocks, Sheet, white, Unlabeled, Can be labeled with: BLUEMARK CLED, BLUEMARK LED, Plotter, Mounting type: Snap into tall marker groove, For terminal block width: 6.2 mm, Lettering field: 5.6 x 10.5 mm

---

#### Marker for terminal blocks - UC-TM 6 OG - 0818328



Marker for terminal blocks, Sheet, orange, Unlabeled, Can be labeled with: BLUEMARK CLED, BLUEMARK LED, Plotter, Mounting type: Snap into tall marker groove, For terminal block width: 6.2 mm, Lettering field: 5.6 x 10.5 mm

---

#### Marker for terminal blocks - UC-TM 6 YE - 0818331



Marker for terminal blocks, Sheet, yellow, Unlabeled, Can be labeled with: BLUEMARK CLED, BLUEMARK LED, Plotter, Mounting type: Snap into tall marker groove, For terminal block width: 6.2 mm, Lettering field: 5.6 x 10.5 mm

---

#### Marker for terminal blocks - UC-TM 6 BU - 0818344



Marker for terminal blocks, Sheet, blue, Unlabeled, Can be labeled with: BLUEMARK CLED, BLUEMARK LED, Plotter, Mounting type: Snap into tall marker groove, For terminal block width: 6.2 mm, Lettering field: 5.6 x 10.5 mm

---

#### Marker for terminal blocks - UC-TM 6 RD - 0818357



Marker for terminal blocks, Sheet, red, Unlabeled, Can be labeled with: BLUEMARK CLED, BLUEMARK LED, Plotter, Mounting type: Snap into tall marker groove, For terminal block width: 6.2 mm, Lettering field: 5.6 x 10.5 mm

## Surge protection device - LIT 2X1-24 - 2804636

### Accessories


Marker for terminal blocks - UC-TM 6 GN - 0818360




Marker for terminal blocks, Sheet, green, Unlabeled, Can be labeled with: BLUEMARK CLED, BLUEMARK LED, Plotter,  
Mounting type: Snap into tall marker groove, For terminal block width: 6.2 mm, Lettering field: 5.6 x 10.5 mm

### Drawings

Dimensioned drawing

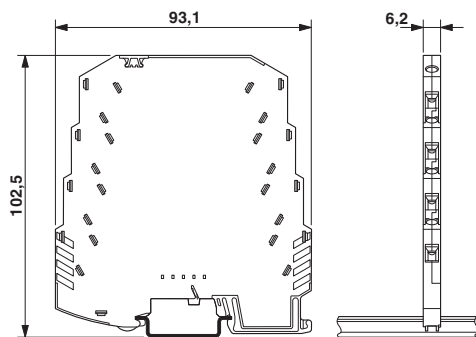

Circuit diagram

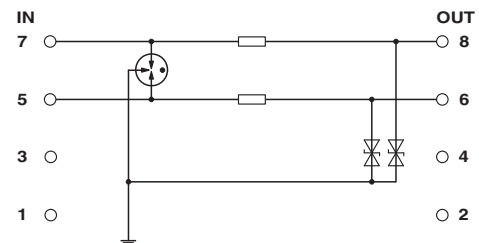

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9