

10135317 - 10X LF

LEAD-FREE DESIGNATION  
ONLY WITH APPLICABLE  
PLATING CODES

SEE NOTE 2





| MODULE DESCRIPTION                                         | LETTER DESIGNATION REPRESENTED IN DASH NUMBER |               |   |   |   |   |   |   |   |   | BASE MODULE |
|------------------------------------------------------------|-----------------------------------------------|---------------|---|---|---|---|---|---|---|---|-------------|
| LEFT<br>POLARIZING<br>GUIDANCE<br>MODULE<br>(SEE SHEET 3)  | N                                             | J<br>(NO KEY) | A | B | C | D | E | F | G | H |             |
|                                                            | NO KEY<br>NO GUIDE PIN                        |               |   |   |   |   |   |   |   |   |             |
| RIGHT<br>POLARIZING<br>GUIDANCE<br>MODULE<br>(SEE SHEET 2) | Z                                             | Y<br>(NO KEY) | P | Q | R | S | T | U | V | W |             |
|                                                            | NO KEY<br>NO GUIDE PIN                        |               |   |   |   |   |   |   |   |   |             |

NOT TOOLED

PRELIMINARY

|                                       |  |            |  |                        |  |              |  |                                                                                       |  |                                                                                       |  |                       |  |           |  |
|---------------------------------------|--|------------|--|------------------------|--|--------------|--|---------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------|--|-----------------------|--|-----------|--|
| spec ref -                            |  |            |  | dr Jackie Chen         |  | 2015/05/27   |  | projection                                                                            |  | MM                                                                                    |  | size A2               |  | scale 5:1 |  |
| tolerance std ASME Y14.5 -            |  |            |  | eng Tao Zhan           |  | 2016/03/14   |  |  |  |  |  | ecn no -              |  |           |  |
| TOLERANCES UNLESS OTHERWISE SPECIFIED |  |            |  | chr -                  |  | -            |  |                                                                                       |  |                                                                                       |  | rel level Preliminary |  |           |  |
| -                                     |  |            |  | appr -                 |  | -            |  | product family                                                                        |  | AIRMAX VS2                                                                            |  | -                     |  |           |  |
| surface -                             |  | linear     |  | 0.X ±0.3               |  | ±0.15        |  | Amphenol FCI                                                                          |  | title AIRMAX VERTICAL HEADER                                                          |  | dwg no 10135317       |  | rev 1     |  |
| ASME Y14.5                            |  | angular    |  | 0° ±2°                 |  | 0.XXX ±0.050 |  |                                                                                       |  |                                                                                       |  |                       |  |           |  |
| PRESS-FIT, 5-PAIR, 150 POS, W/G       |  | cat. no. - |  | Product - Customer Drw |  | sheet 1 of 4 |  |                                                                                       |  |                                                                                       |  |                       |  |           |  |

RIGHT POLARIZING WITH GUIDE

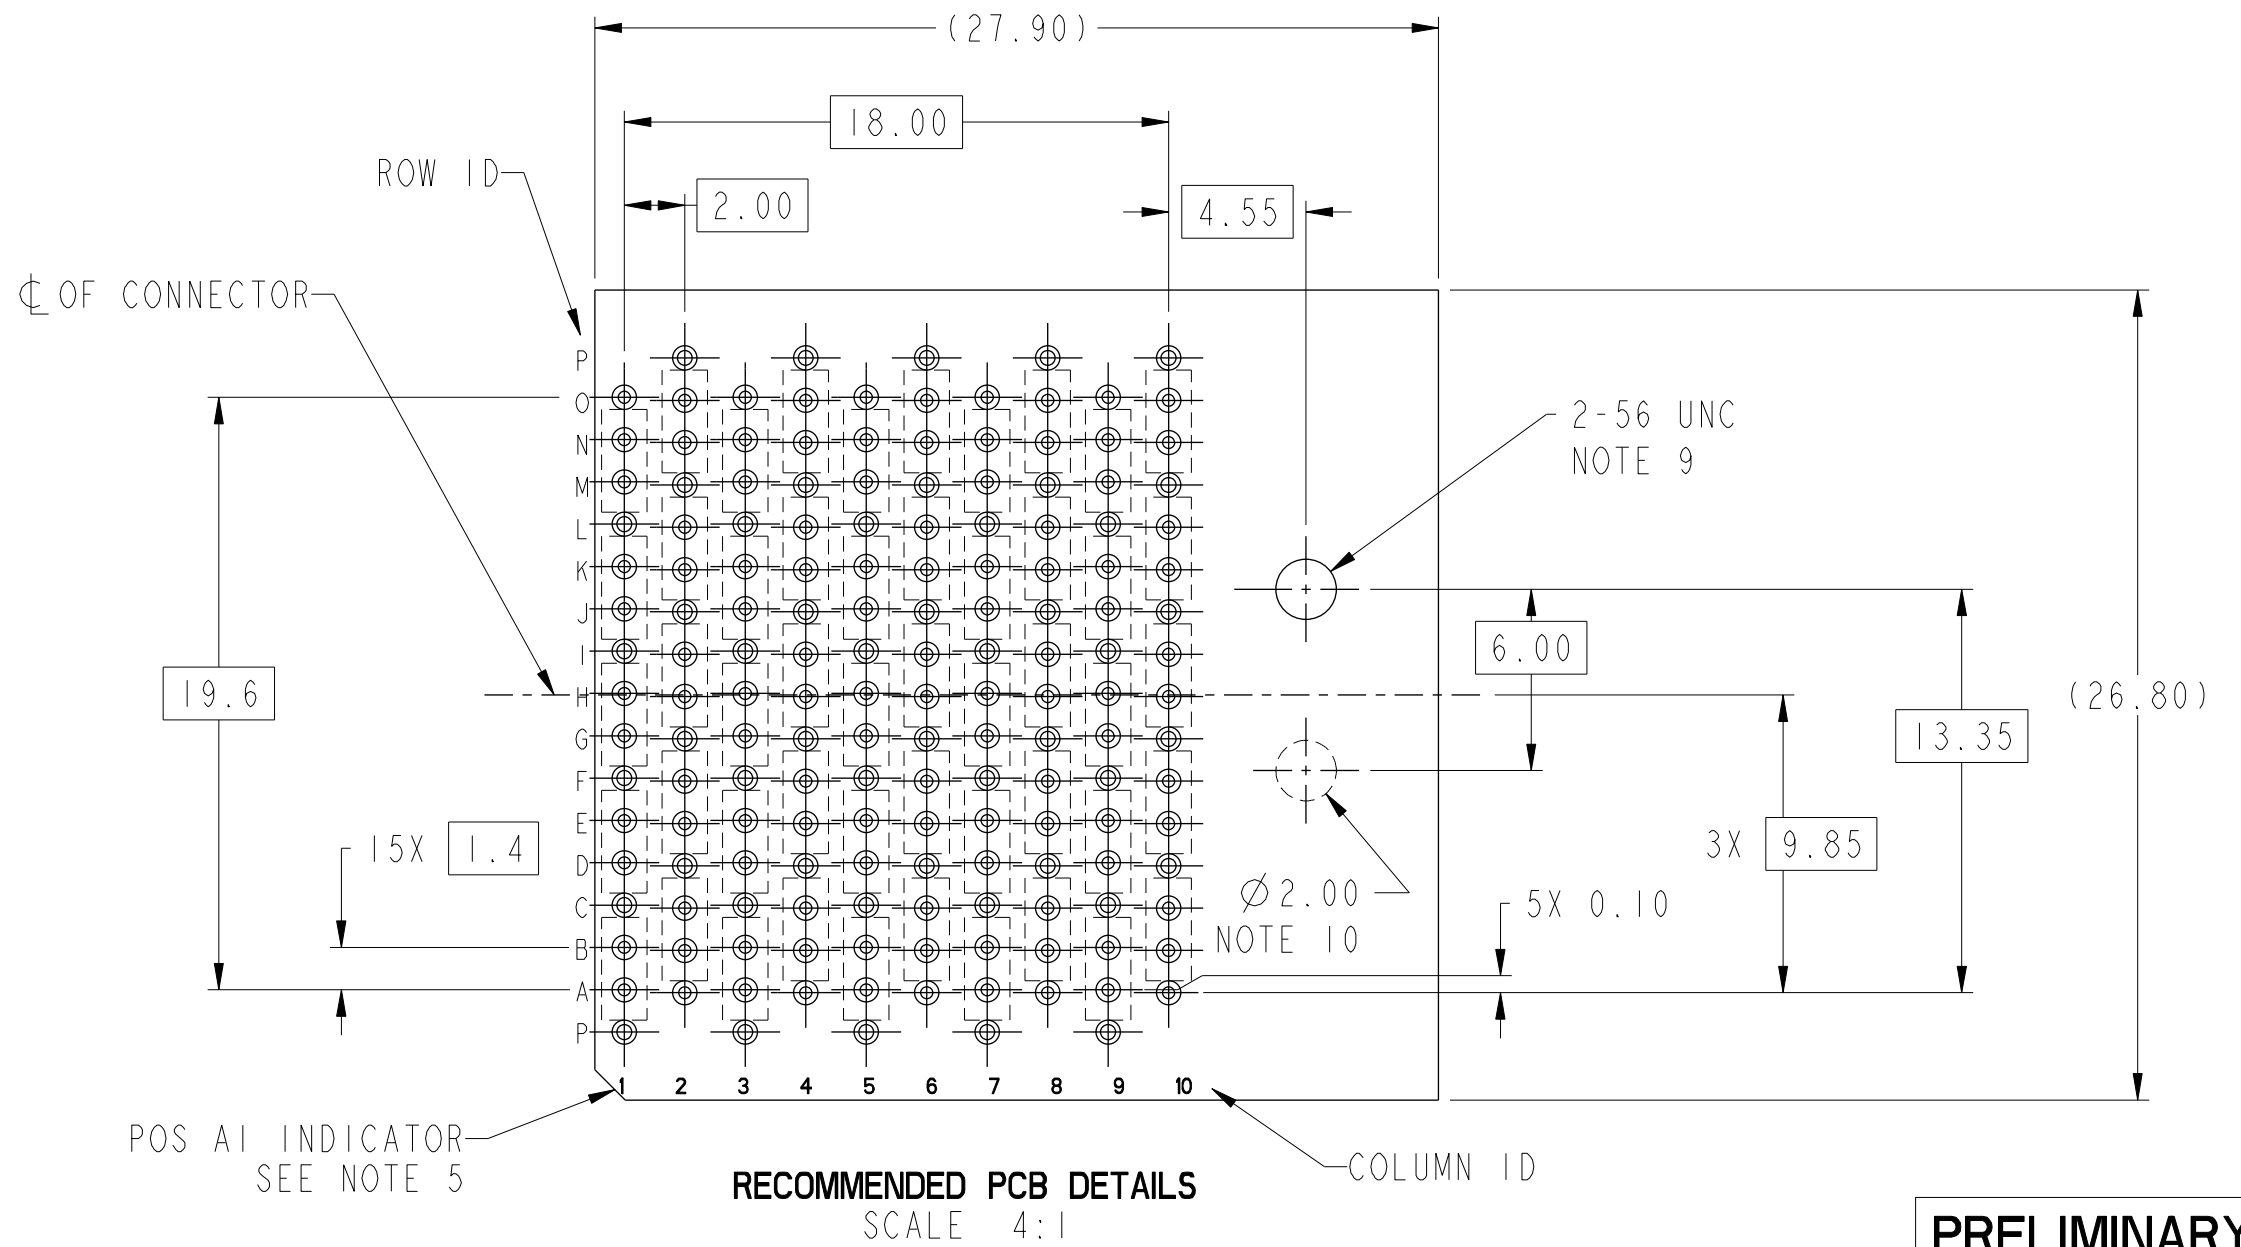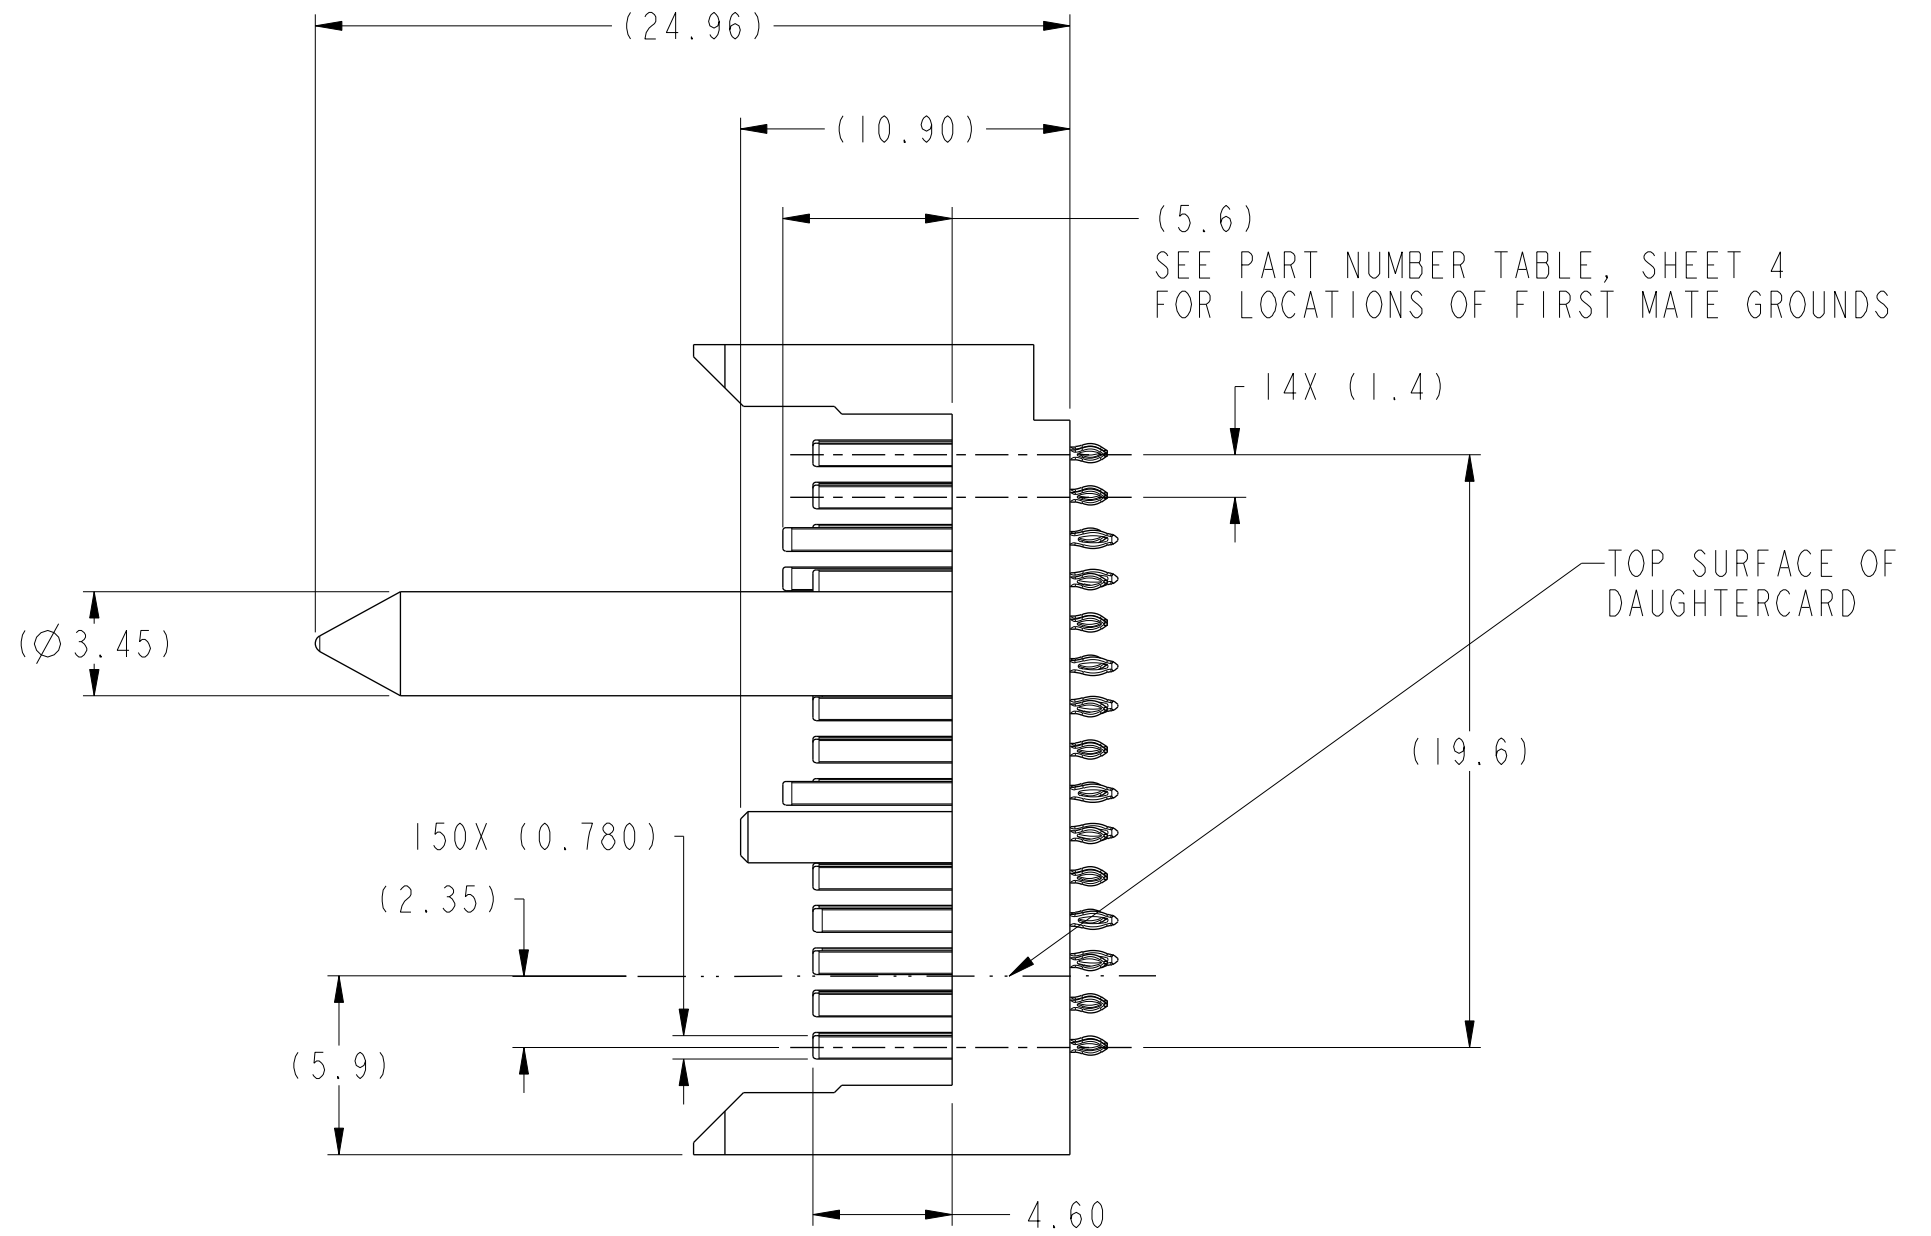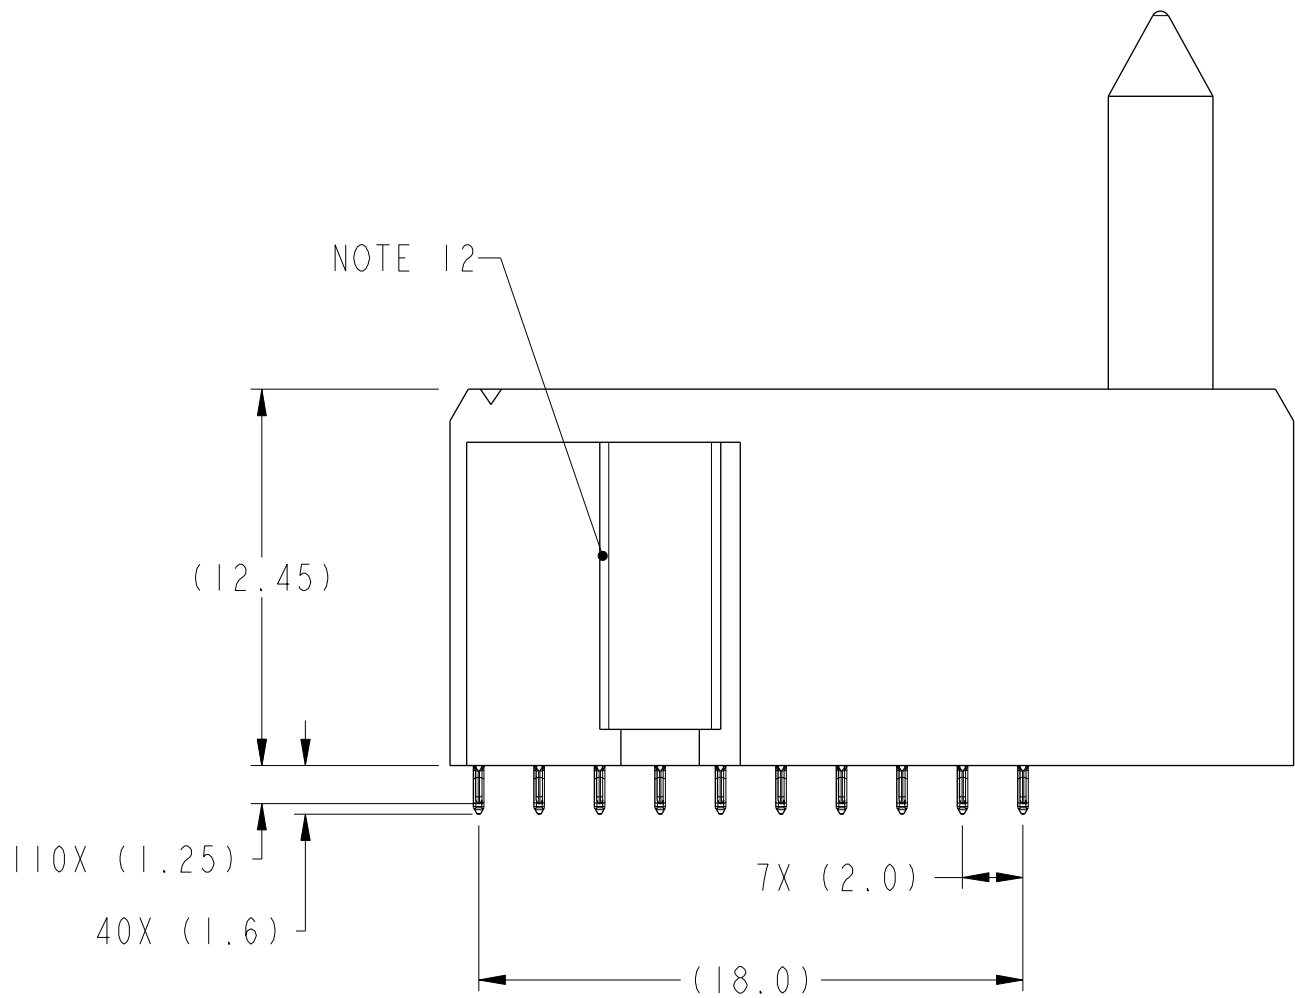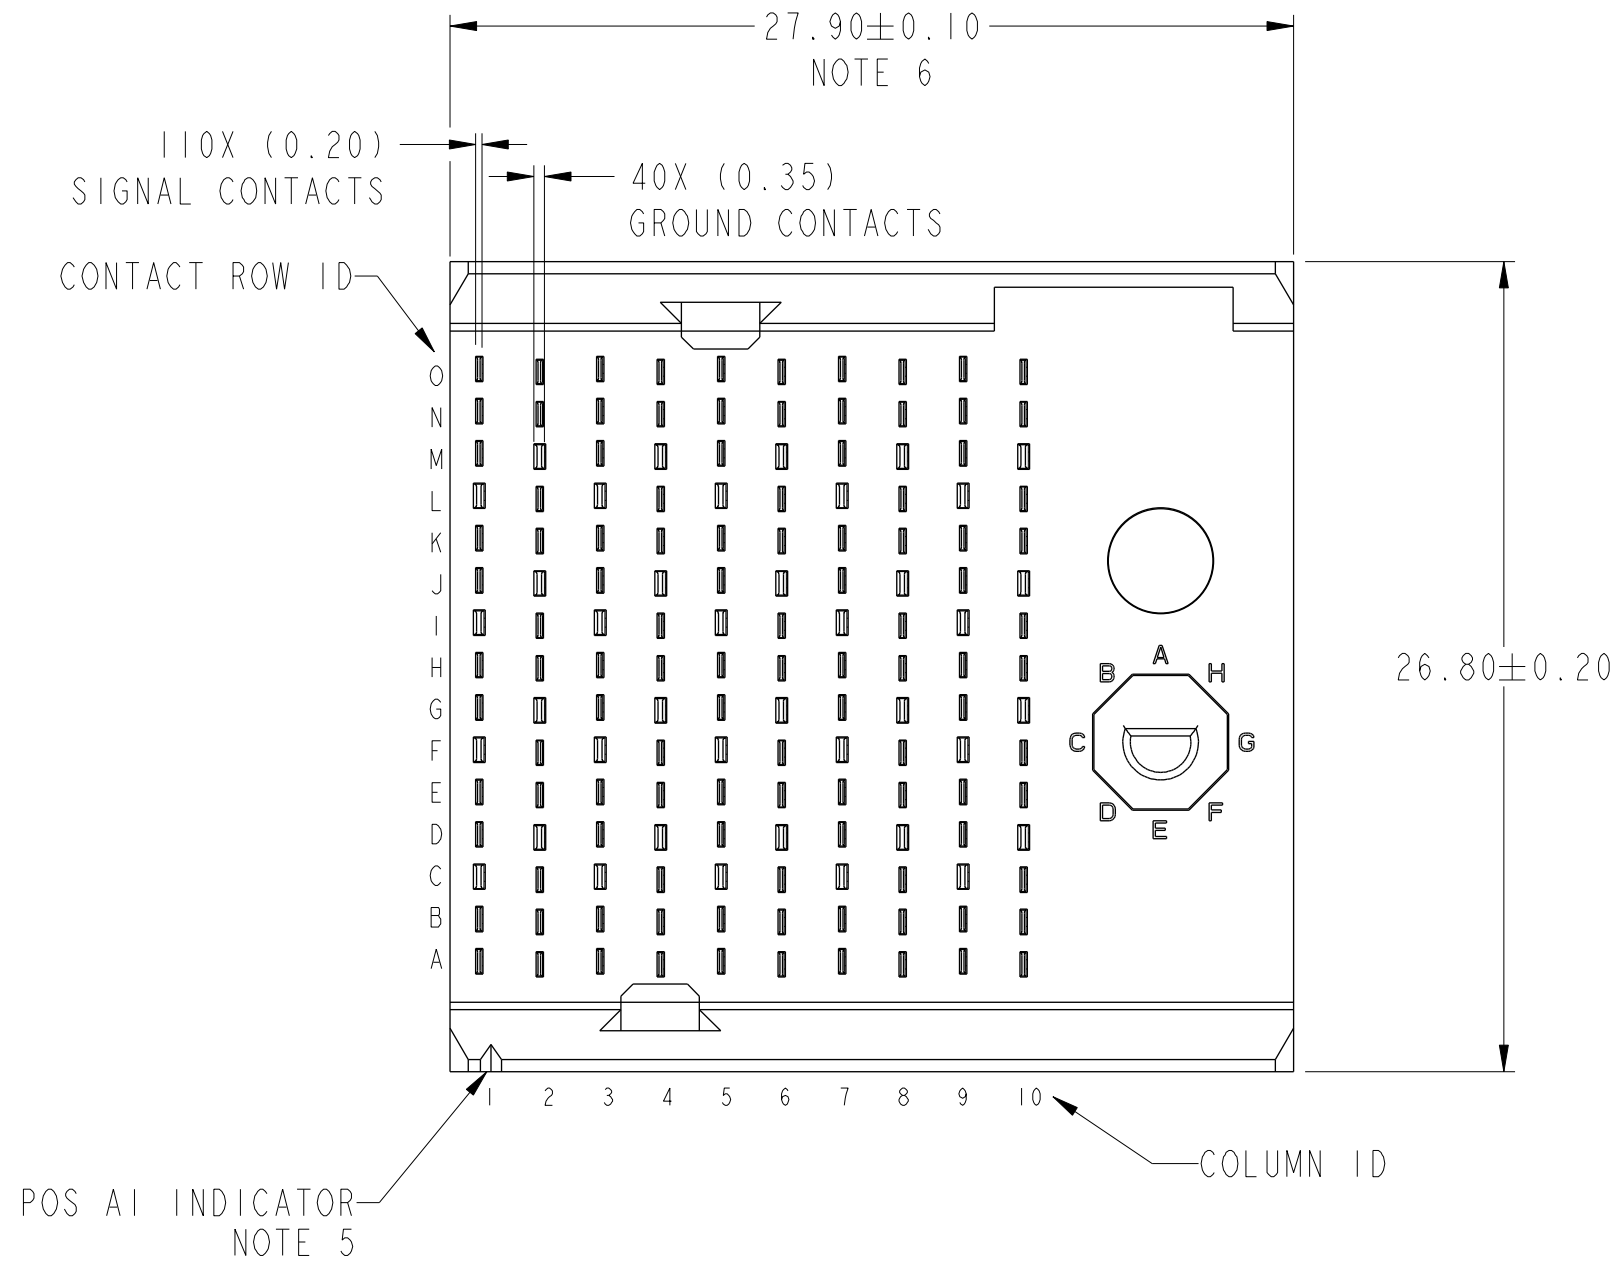





|               |  |                                       |  |                |  |            |  |                                                                                       |  |                                                                                       |  |          |  |                |  |             |  |     |  |      |  |          |  |       |  |                        |  |              |  |
|---------------|--|---------------------------------------|--|----------------|--|------------|--|---------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------|--|----------|--|----------------|--|-------------|--|-----|--|------|--|----------|--|-------|--|------------------------|--|--------------|--|
| spec ref      |  | -                                     |  | dr Jackie Chen |  | 2015/05/27 |  | projection                                                                            |  |  |  | MM       |  | size A2        |  | scale 4:1   |  |     |  |      |  |          |  |       |  |                        |  |              |  |
| tolerance std |  | TOLERANCES UNLESS OTHERWISE SPECIFIED |  | eng Tao Zhan   |  | 2016/03/14 |  |  |  |                                                                                       |  |          |  | ecn no         |  | -           |  |     |  |      |  |          |  |       |  |                        |  |              |  |
| ASME Y14.5    |  |                                       |  | chr            |  | -          |  |                                                                                       |  |                                                                                       |  |          |  | rel level      |  | Preliminary |  |     |  |      |  |          |  |       |  |                        |  |              |  |
| -             |  |                                       |  | appr           |  | -          |  |                                                                                       |  |                                                                                       |  |          |  | product family |  | AIRMAX VS2  |  |     |  |      |  |          |  |       |  |                        |  |              |  |
| surface       |  | ✓                                     |  | Amphenol FCI   |  | title      |  | AIRMAX VERTICAL HEADER                                                                |  | dwg no                                                                                |  | 10135317 |  | rev            |  | 1           |  |     |  |      |  |          |  |       |  |                        |  |              |  |
| ASME Y14.5    |  | linear                                |  |                |  |            |  |                                                                                       |  |                                                                                       |  |          |  |                |  |             |  | 0.X |  | ±0.3 |  | 0.XX     |  | ±0.15 |  | 0.XXX                  |  | ±0.050       |  |
|               |  | angular                               |  |                |  |            |  |                                                                                       |  |                                                                                       |  |          |  |                |  |             |  | 0°  |  | ±2°  |  | cat. no. |  | -     |  | Product - Customer Drw |  | sheet 2 of 4 |  |
|               |  |                                       |  |                |  |            |  | PRESS-FIT, 5-PAIR, 150 POS, W/G                                                       |  |                                                                                       |  |          |  |                |  |             |  |     |  |      |  |          |  |       |  |                        |  |              |  |

PRELIMINARY

Amphenol  
FCI

© 2016 APCI

LEFT POLARIZING WITH GUIDE

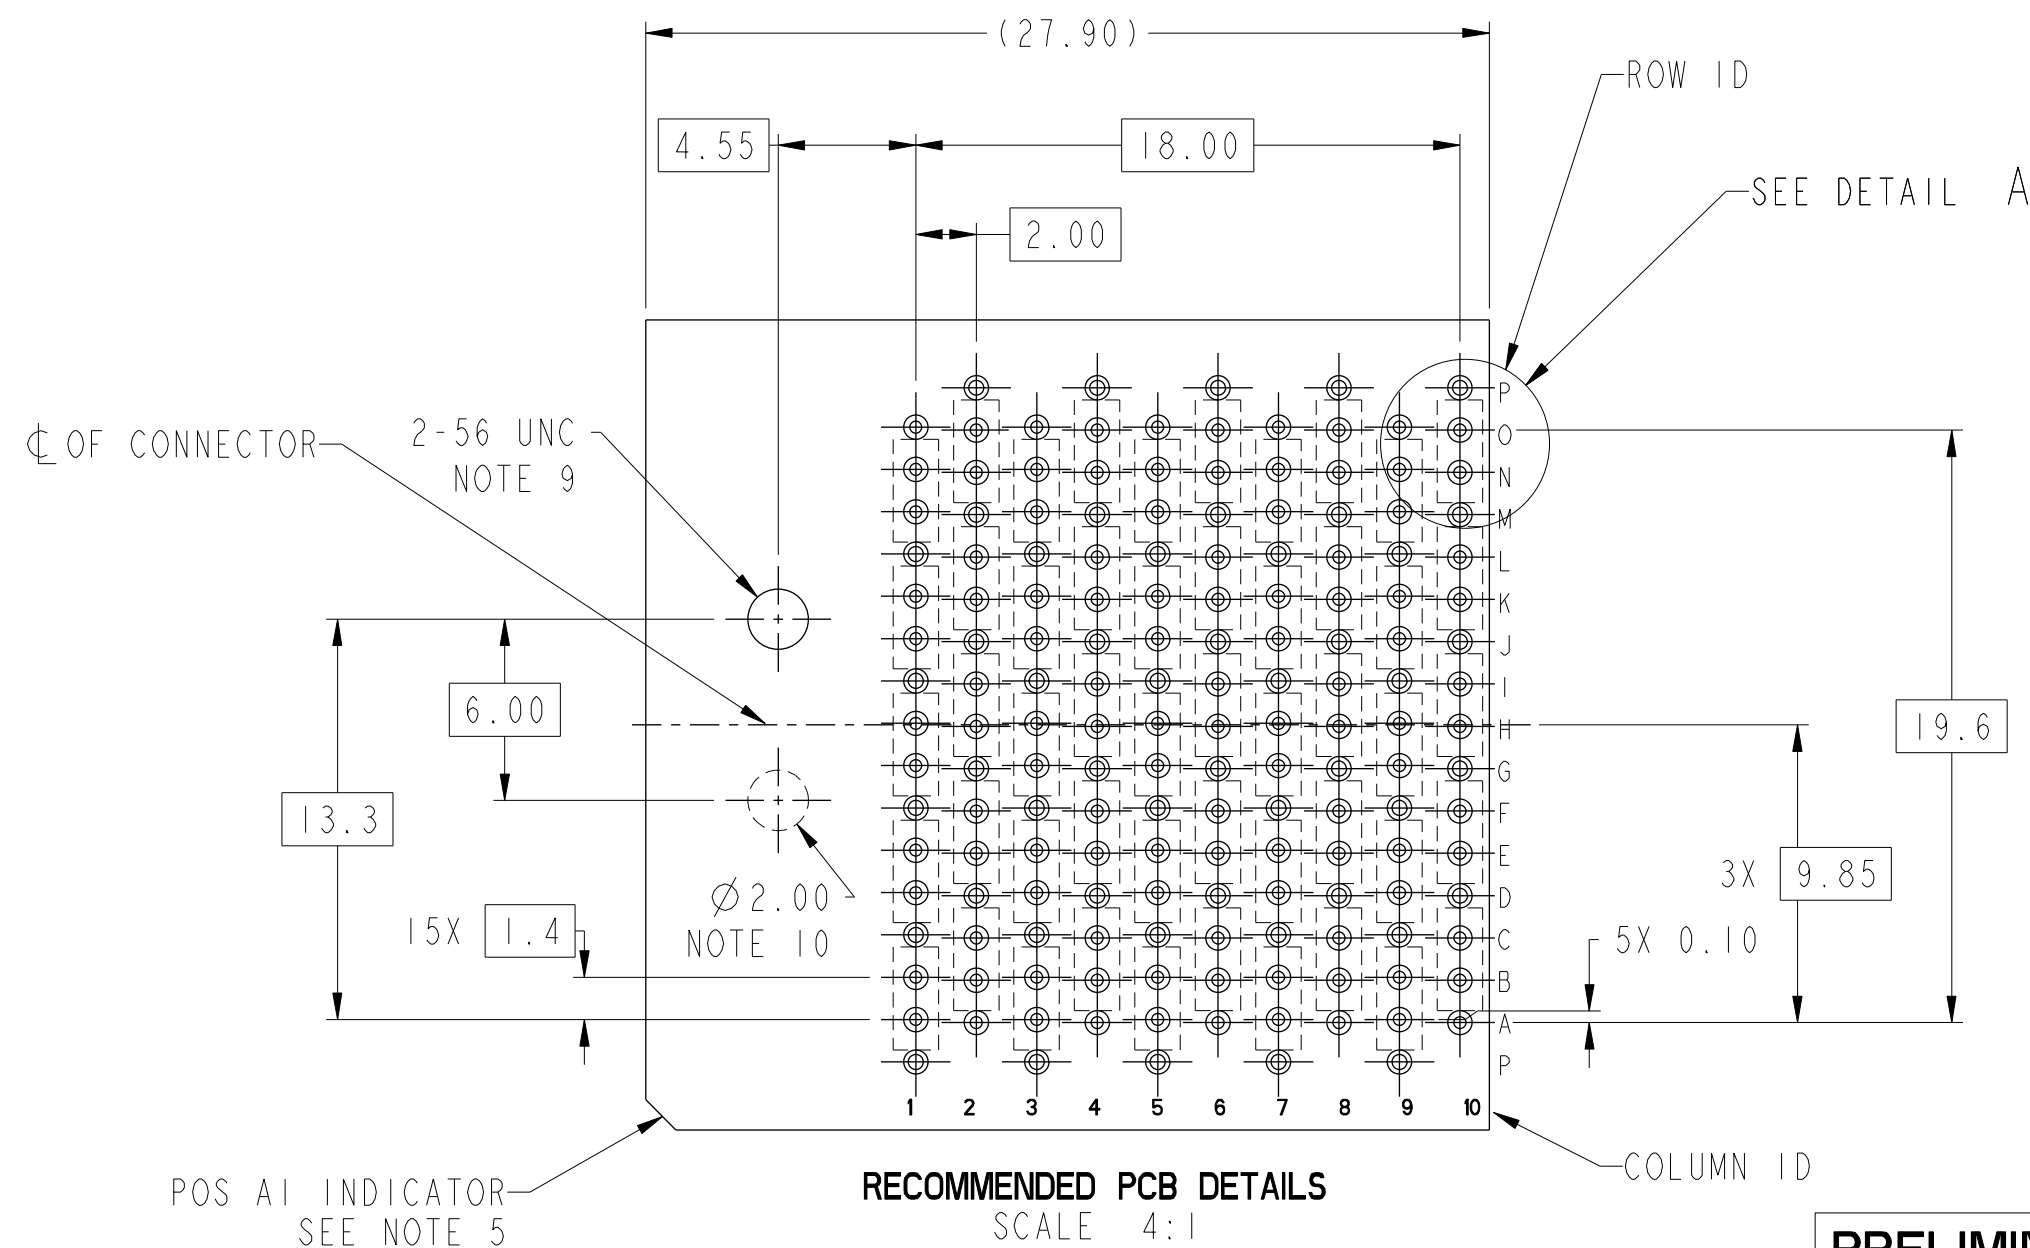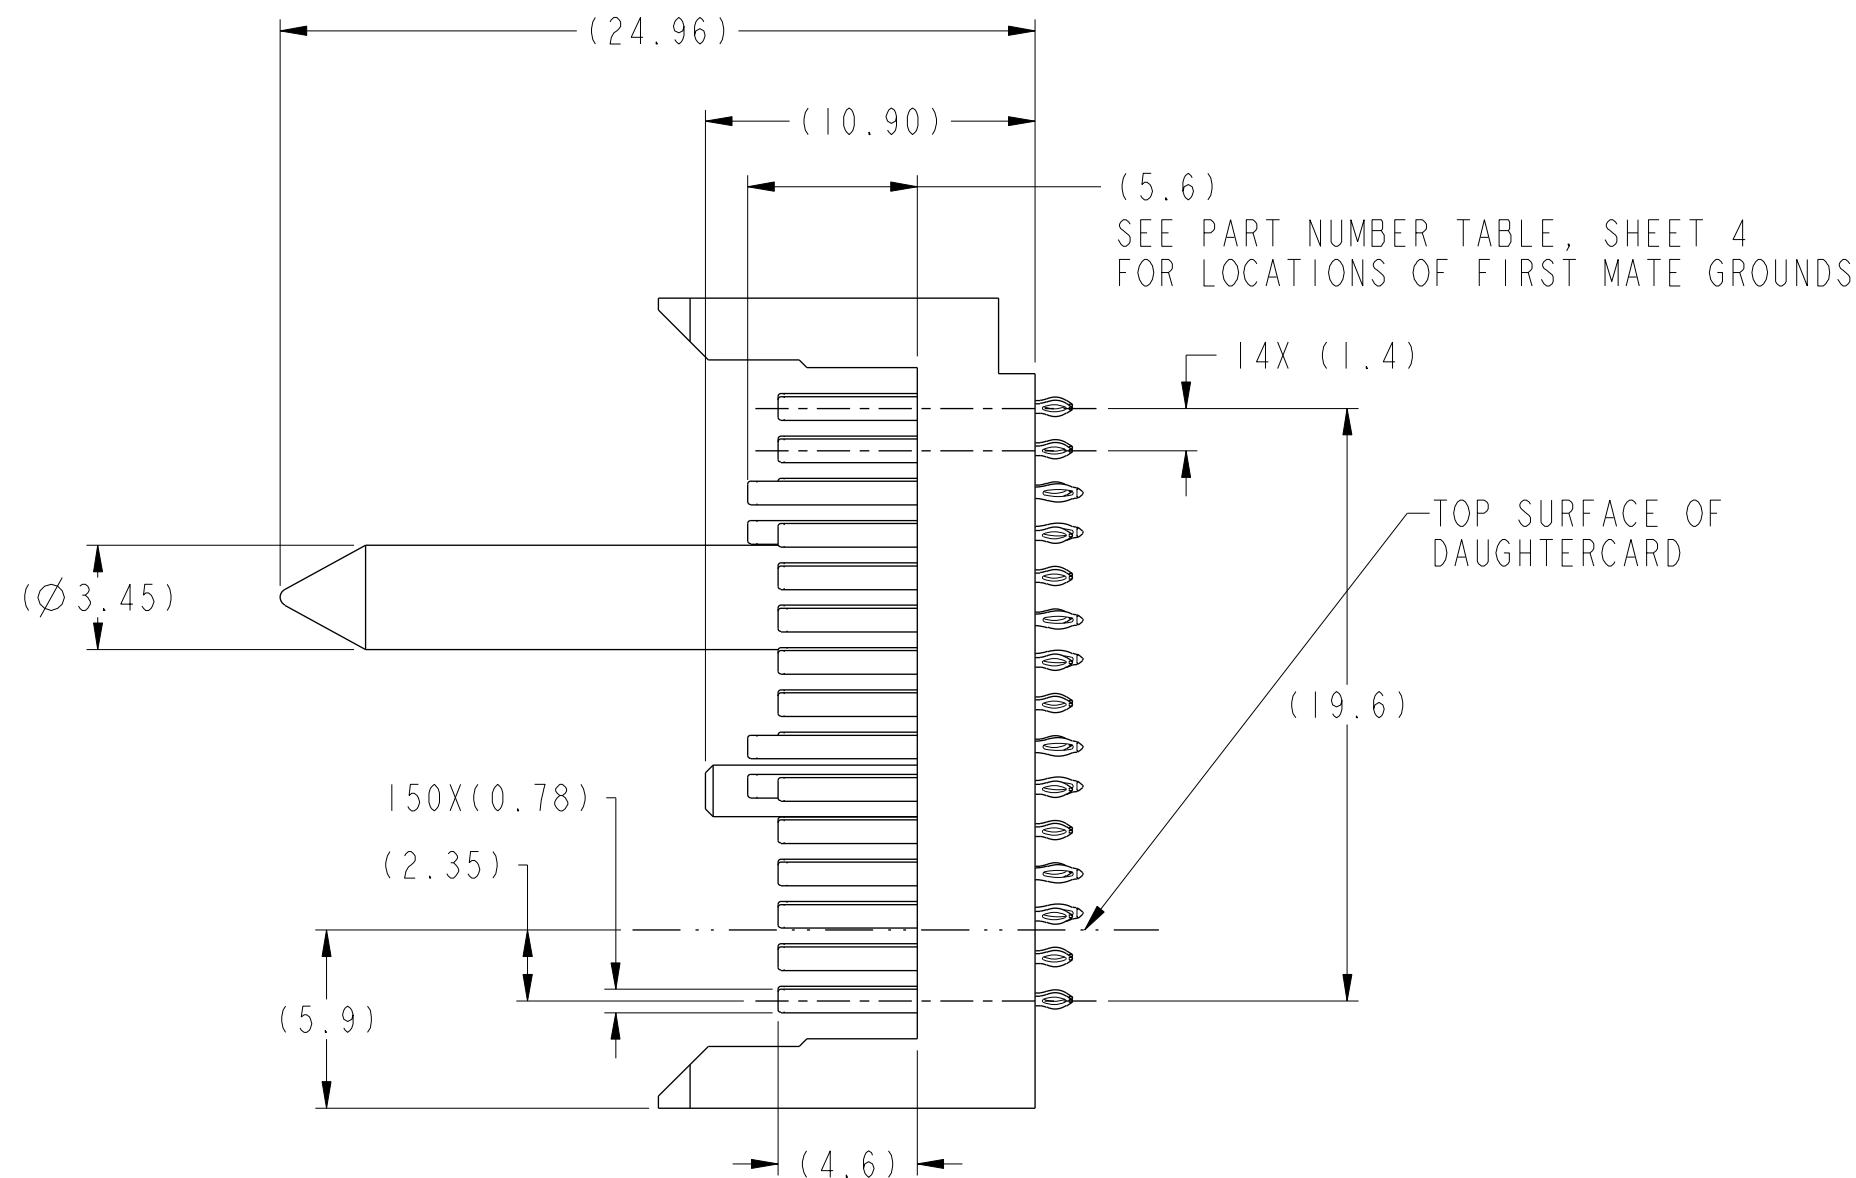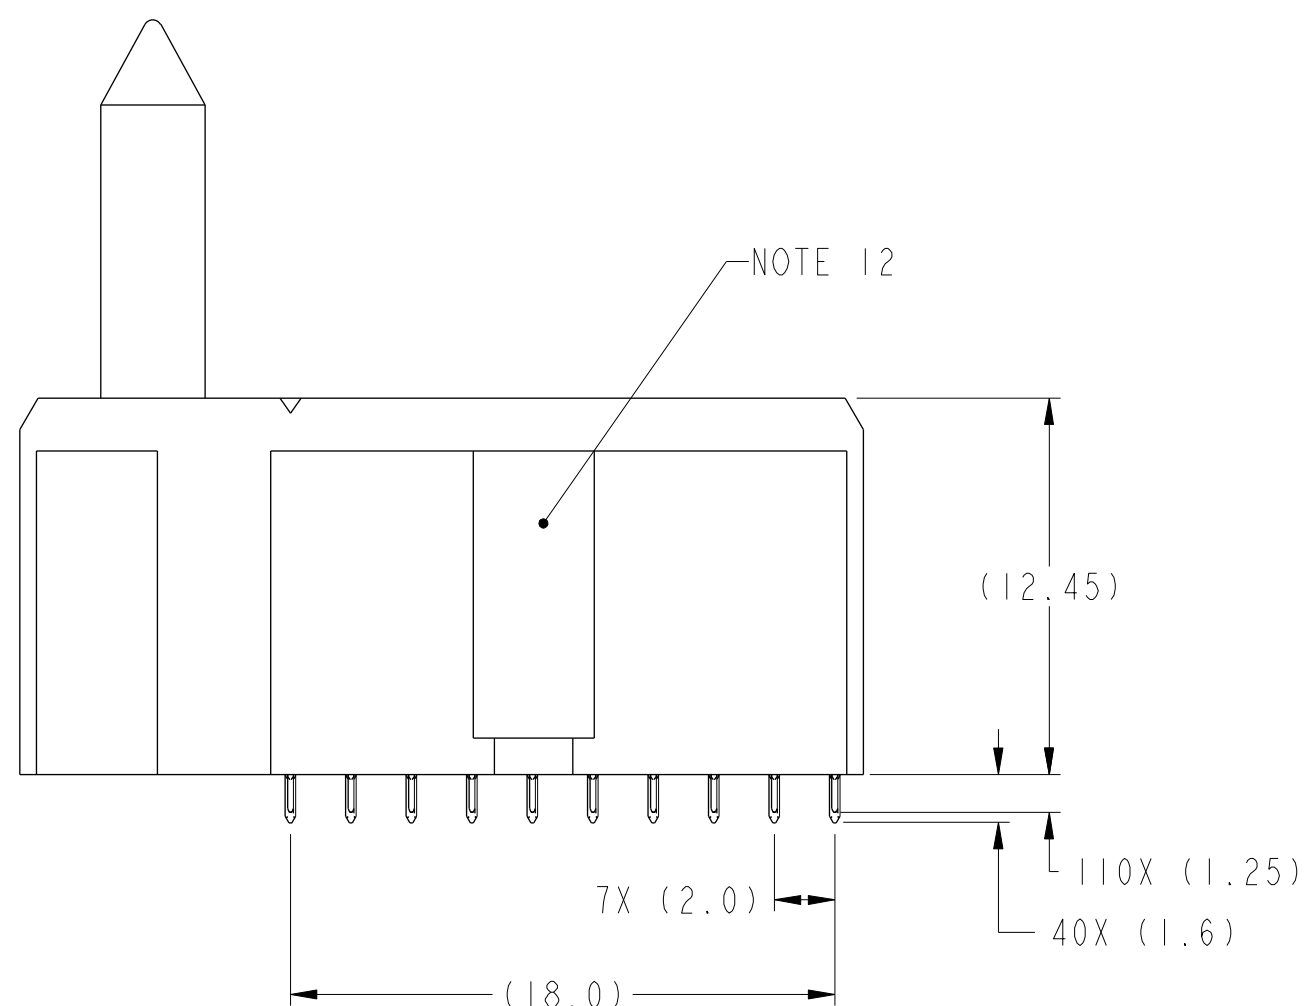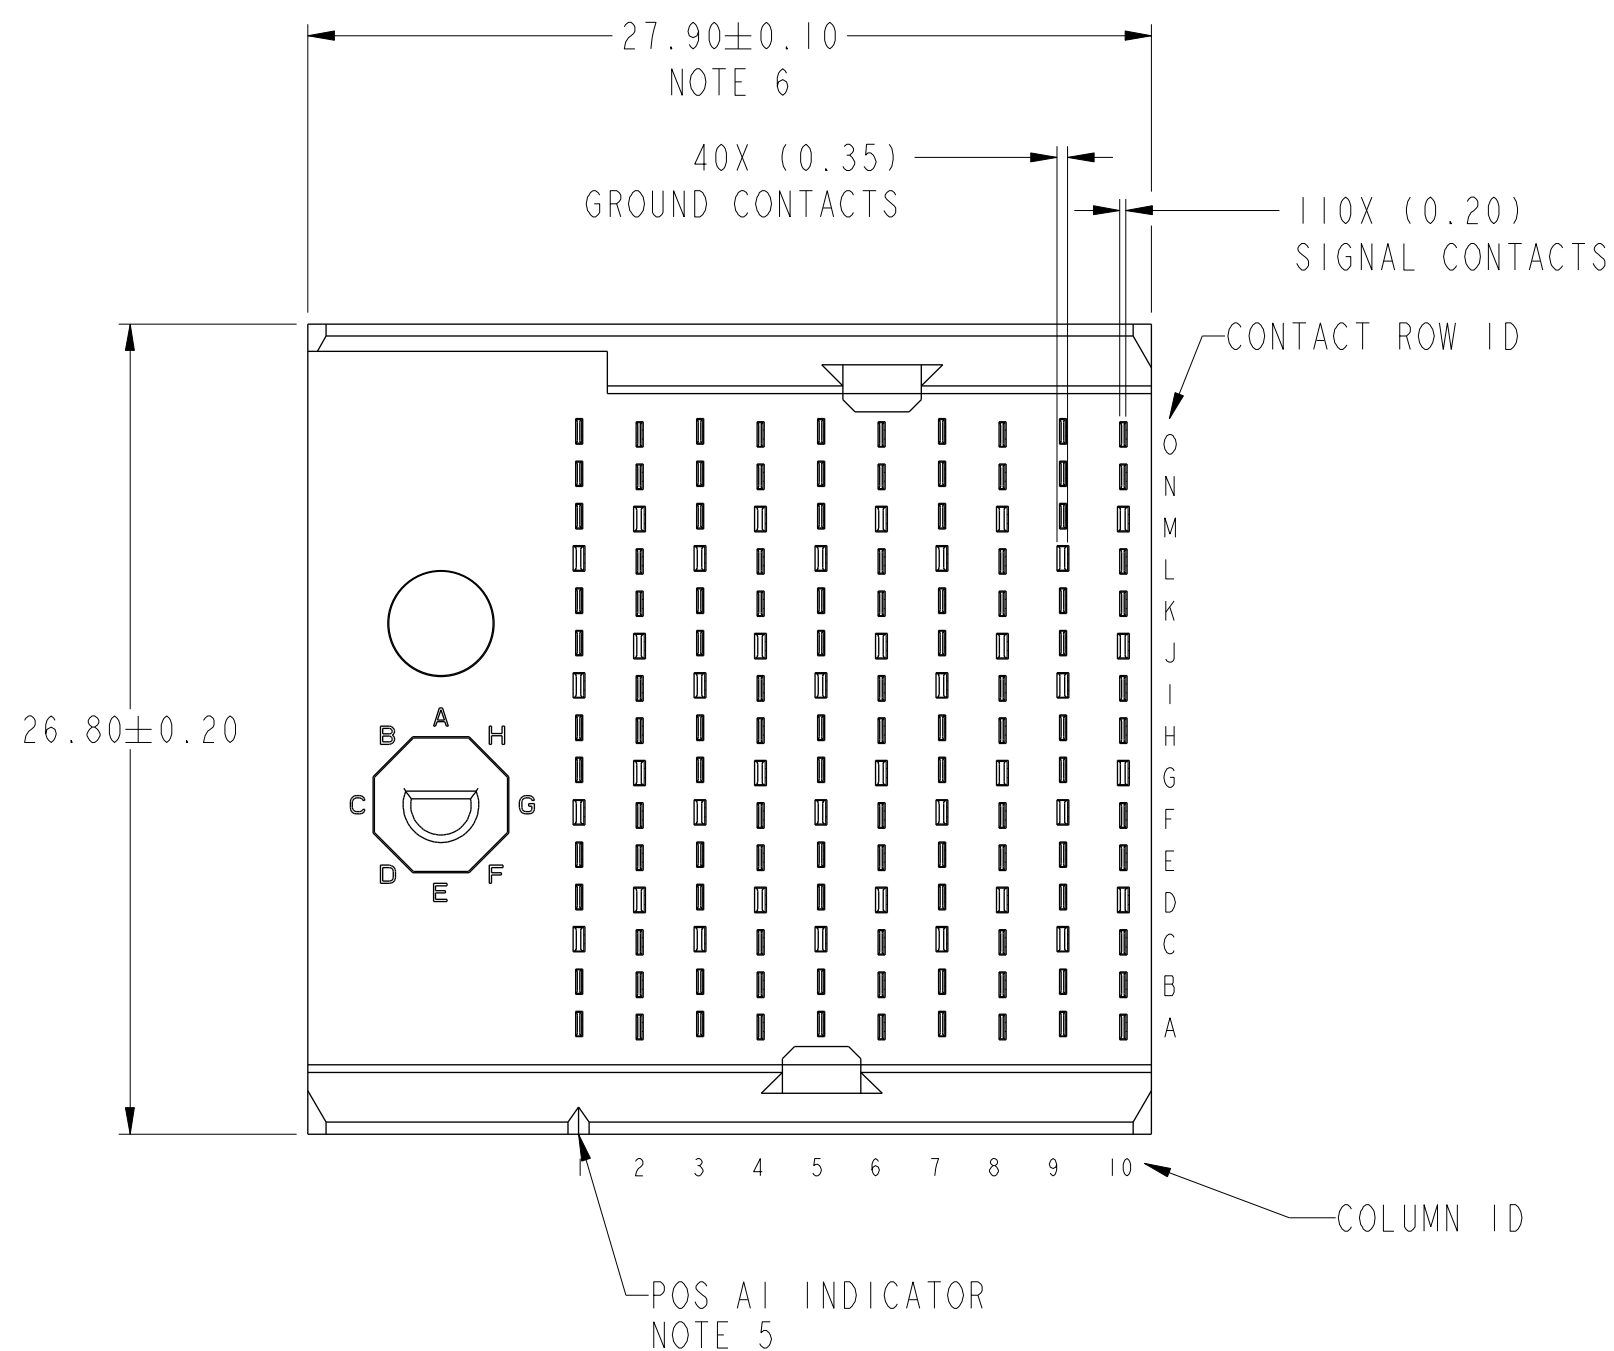

RECOMMENDED PCB DETAILS  
SCALE 4:1


PRELIMINARY

|                                 |            |      |             |            |                |            |             |          |           |               |
|---------------------------------|------------|------|-------------|------------|----------------|------------|-------------|----------|-----------|---------------|
| spec ref                        | -          | dr   | Jackie Chen | 2015/05/27 | projection     | MM         | size        | A2       | scale     | 4:1           |
| tolerance std                   | ASME Y14.5 | eng  | Tao Zhan    | 2016/03/14 | chr            | -          | ecn no      | -        | rel level | Preliminary   |
| surface                         | -          | appr | -           | -          | product family | AIRMAX VS2 | dwg no      | 10135317 | rev       | 1             |
| ASME Y14.5                      | linear     | 0.X  | $\pm 0.3$   | 0.XX       | $\pm 0.15$     | 0.XXX      | $\pm 0.050$ | angular  | 0°        | $\pm 2^\circ$ |
| Amphenol FCI                    |            |      |             |            |                |            |             |          |           |               |
| AIRMAX VERTICAL HEADER          |            |      |             |            |                |            |             |          |           |               |
| PRESS-FIT, 5-PAIR, 150 POS, W/G |            |      |             |            |                |            |             |          |           |               |
| cat. no. -                      |            |      |             |            |                |            |             |          |           |               |
| Product - Customer Drw          |            |      |             |            |                |            |             |          |           |               |
| sheet 3 of 4                    |            |      |             |            |                |            |             |          |           |               |



| 1              | 2                           | 3                                                                                      |
|----------------|-----------------------------|----------------------------------------------------------------------------------------|
| PART NUMBER    | PRESS-FIT TAIL PLATING TYPE | FIRST MATE PIN LOCATIONS                                                               |
| 10135317-10*LF | TIN OVER NICKEL (LEAD FREE) | F1, F3, F5, F7, F9<br>G2, G4, G6, G8, G10<br>L1, L3, L5, L7, L9<br>M2, M4, M6, M8, M10 |

NOTES:

1. CONNECTOR MATERIALS:  
HOUSING: HIGH TEMP THERMOPLASTIC, BLACK, UL94V-0  
CONTACT: COPPER ALLOY
2. CONTACT PLATING:  
SEPARABLE INTERFACE: PERFORMANCE-BASED PLATING, QUALIFIED TO MEET THE REQUIREMENTS OF FCI PRODUCT SPECIFICATION GS-12-0956 INCLUDING TELCORDIA GR-1217-CORE (NOVEMBER 1995) CENTRAL OFFICE TEST SEQUENCE  
PRESS-FIT TAILS: SEE TABLE
3. PRODUCT SPECIFICATION: GS-12-239.
4. APPLICATION SPECIFICATION: GS-20-035.
5. CONNECTOR OUTLINE WITH HOUSING POS AL INDICATOR MAY BE SCREEN PRINTED ONTO CUSTOMER PCB TO BE USED AS A GUIDE FOR MANUAL CONNECTOR PLACEMENT.
6. REFER TO CUSTOMER DRAWING 10104444 FOR INFORMATION ON PCB HOLE DIAMETERS AND PLATING OPTIONS.
7. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
8. PACKAGING MEETS GS-14-920 LEAD FREE LABELING SPECIFICATION.
9. THE SCREW THREAD ON THE CONNECTOR IS 2-56 UNC -2B TAP 8.60 MM, #50 DRILL (1.778) TAP 8.80 MM.
10. NO CIRCUIT IN THIS AREA SURFACE.
11. GROUND VIAS IN POSITION C, F, I, L & P FOR ODD COLUMNS AND POSITIONS D, G, J, M & P FOR EVEN COLUMNS REQUIRE (Ø0.50) FINISHED HOLES. ALL OTHER VIAS REQUIRE (Ø0.40) FINISHED HOLES.
12. PRODUCT MARKING (PROTOTYPE, PART NUMBER & LOT CODE) ON THIS SURFACE

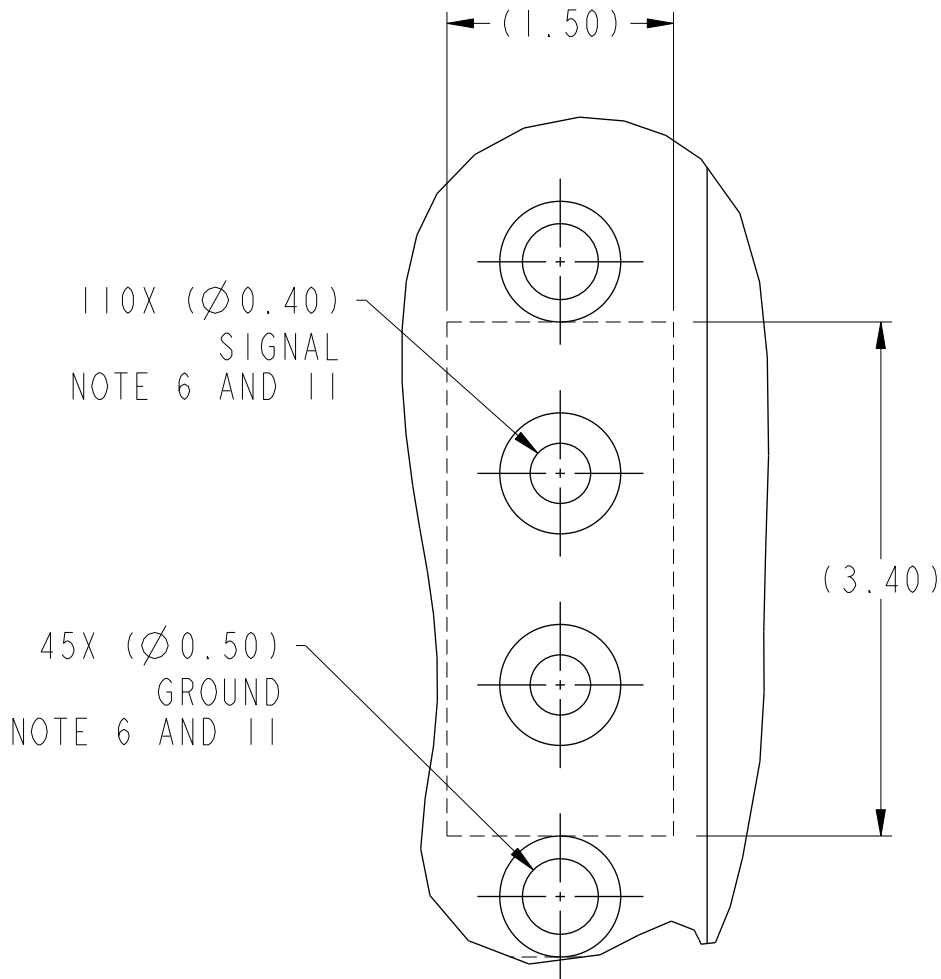

DETAIL A  
SCALE 20:1

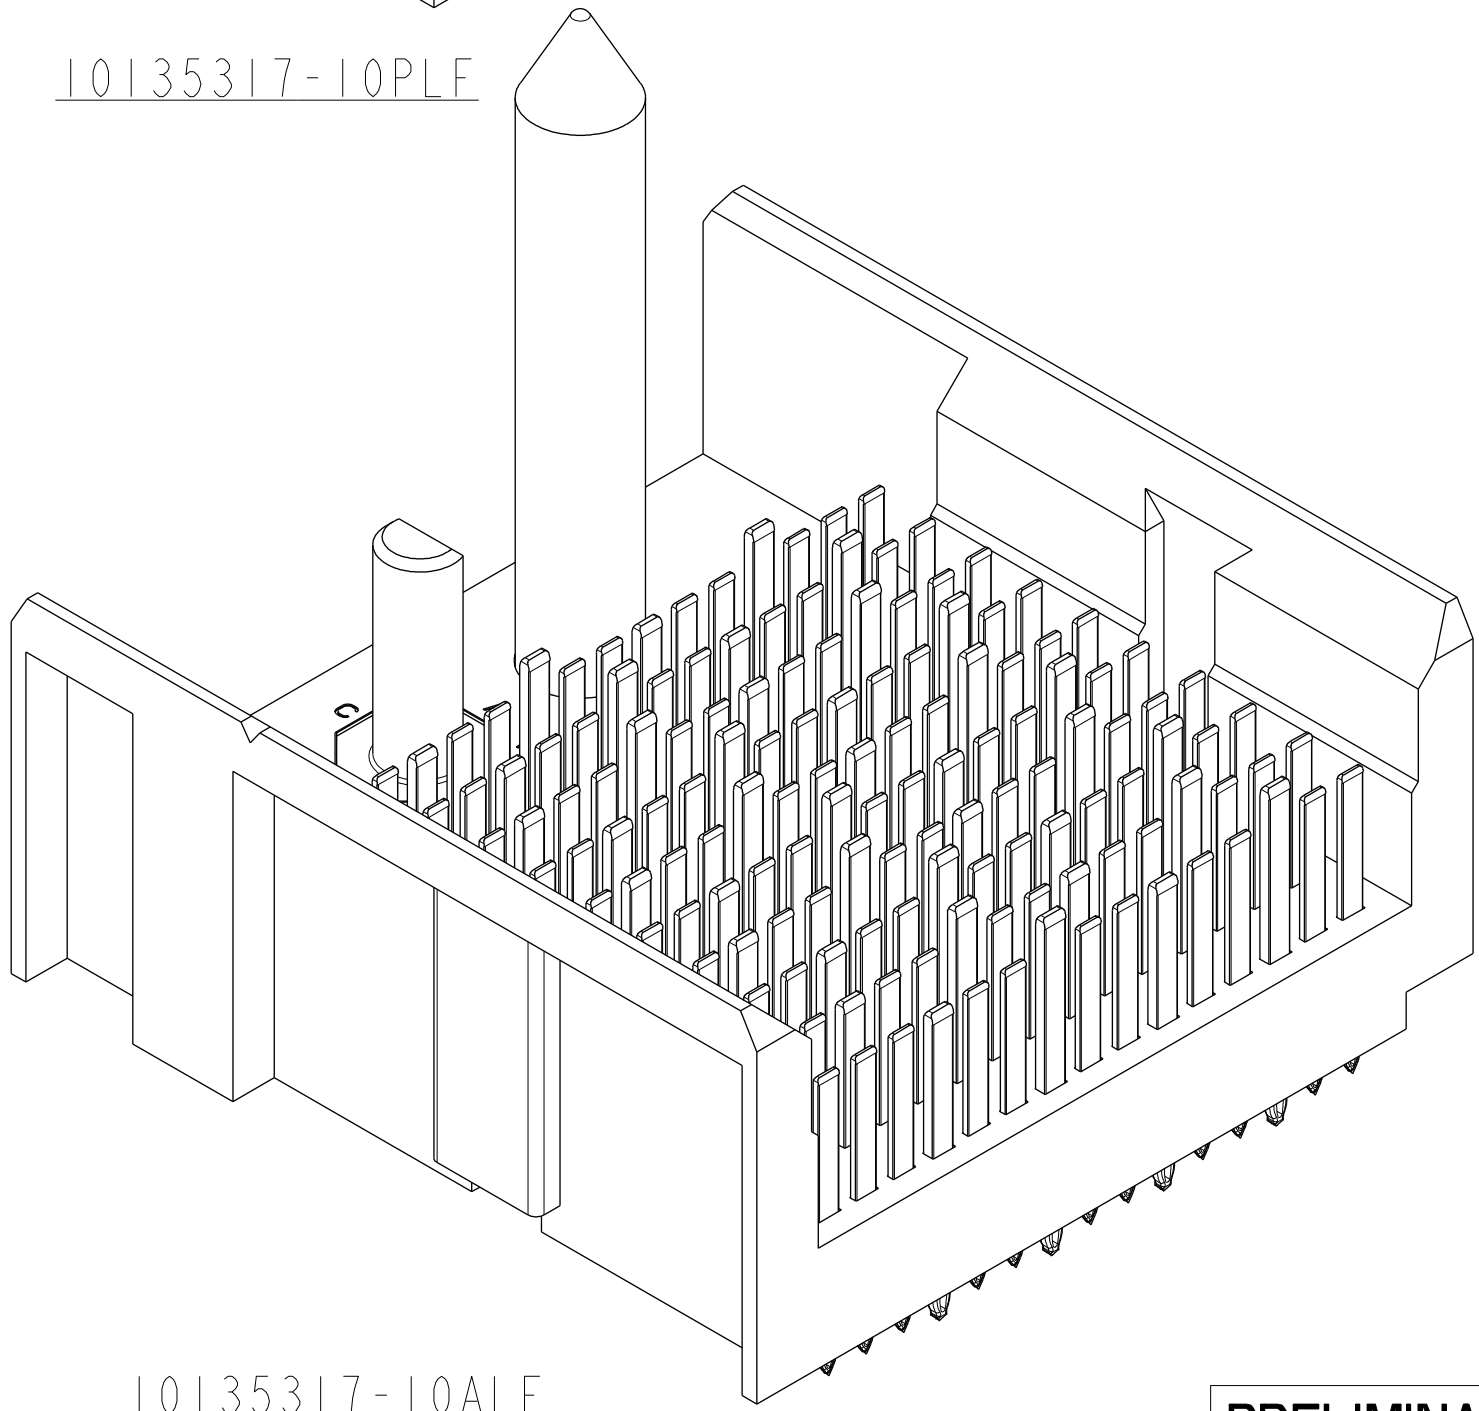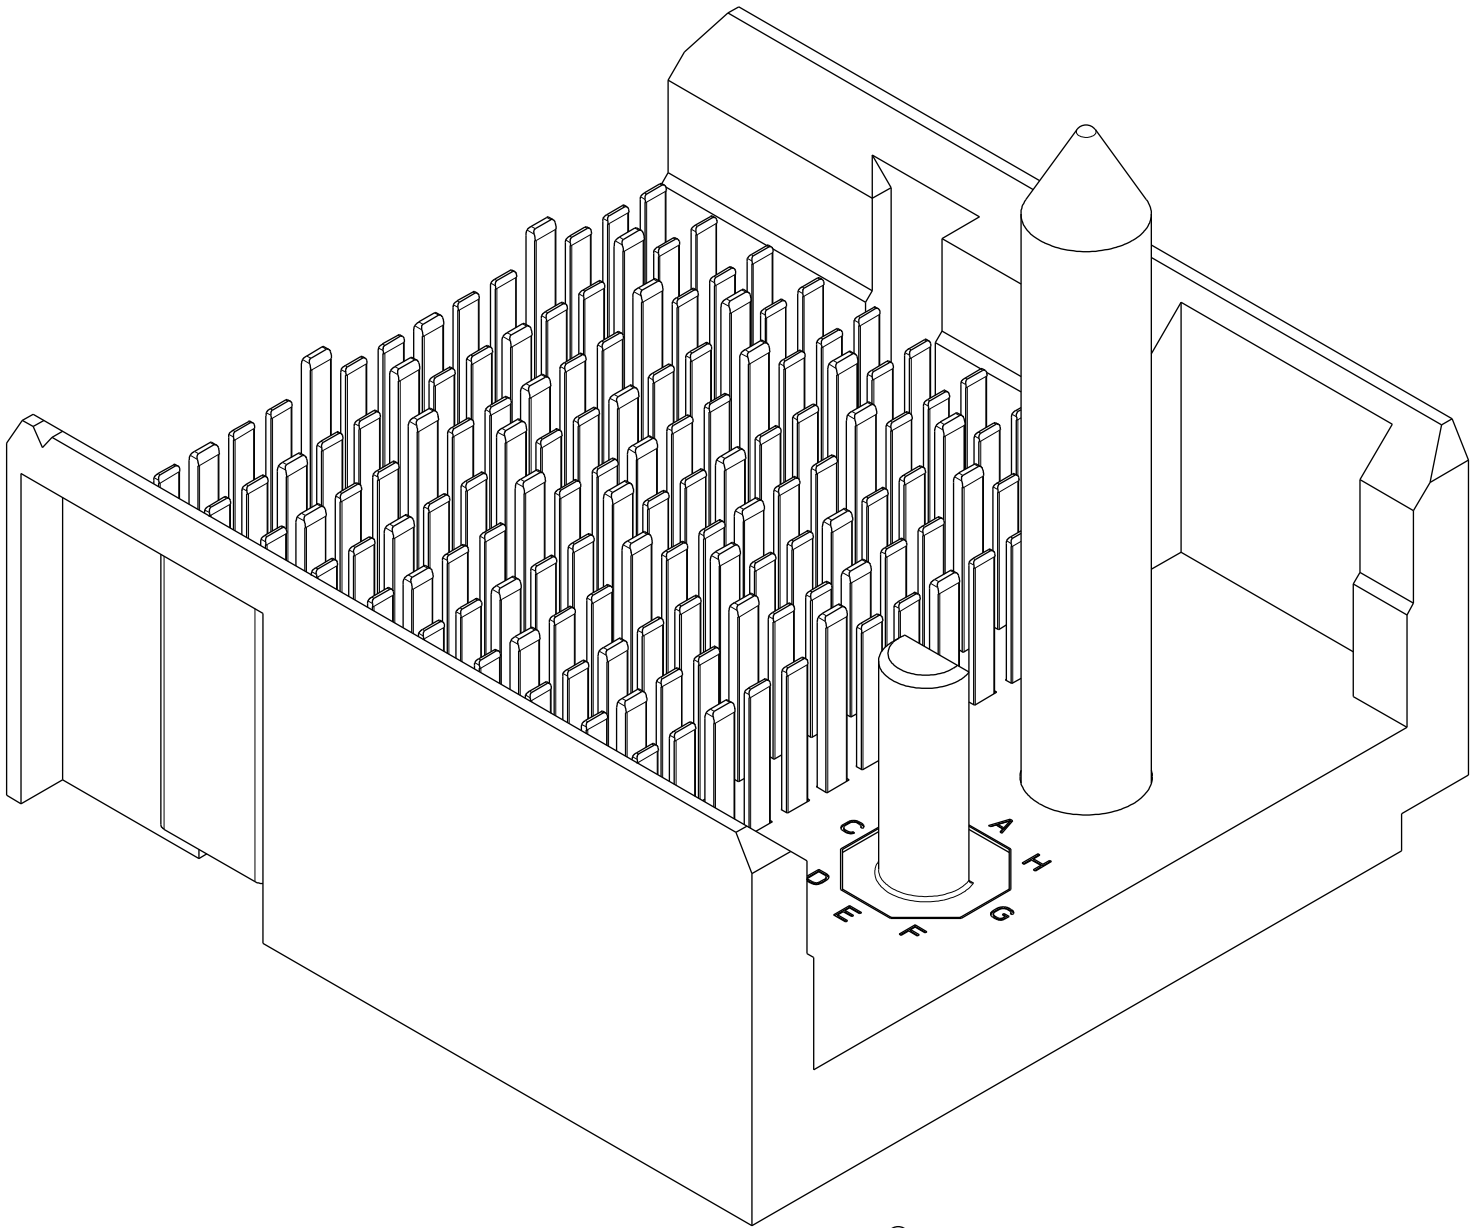

PRELIMINARY

|               |            |        |             |            |                 |            |                                                           |              |          |     |
|---------------|------------|--------|-------------|------------|-----------------|------------|-----------------------------------------------------------|--------------|----------|-----|
| spec ref      | -          | dr     | Jackie Chen | 2015/05/27 | projection      | MM         | size                                                      | A2           | scale    | 5:1 |
| tolerance std | ASME Y14.5 | eng    | Tao Zhan    | 2016/03/14 | chr             | -          | ecn no                                                    | -            |          |     |
|               |            | appr   | -           | -          | product family  | AIRMAX VS2 | rel level                                                 | Preliminary  |          |     |
| surface       | -          | linear | 0.X         | ±0.3       | Amphenol<br>FCi | title      | AIRMAX VERTICAL HEADER<br>PRESS-FIT, 5-PAIR, 150 POS, W/G | dwg no       | 10135317 | rev |
|               |            |        | 0.XX        | ±0.15      |                 |            |                                                           |              |          |     |
|               |            |        | 0.XXX       | ±0.050     |                 |            |                                                           |              |          |     |
| ASME Y14.5    | angular    |        | 0°          | ±2°        | cat. no.        | -          | Product - Customer Drw                                    | sheet 4 of 4 |          |     |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9