


# ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

**CX** Chip Type, High Reliability  
Low temperature ESR specification  
series



- Chip type, high temperature range, for +135°C use.
- Added ESR specification after the test at -40°C.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU).

**CX**



## Specifications


| Item                          | Performance Characteristics                                                                                                                                                                                                             |                 |      |      |      |                    |                                                   |                               |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|------|------|------|--------------------|---------------------------------------------------|-------------------------------|
| Category Temperature Range    | -40 to +135°C                                                                                                                                                                                                                           |                 |      |      |      |                    |                                                   |                               |
| Rated Voltage Range           | 10 to 50V                                                                                                                                                                                                                               |                 |      |      |      |                    |                                                   |                               |
| Rated Capacitance Range       | 47 to 3300μF                                                                                                                                                                                                                            |                 |      |      |      |                    |                                                   |                               |
| Capacitance Tolerance         | ±20% at 120Hz, 20°C                                                                                                                                                                                                                     |                 |      |      |      |                    |                                                   |                               |
| Leakage Current               | After 2 minutes' application of rated voltage, leakage current is not more than 0.01CV or 3(μA), whichever is greater.                                                                                                                  |                 |      |      |      |                    |                                                   |                               |
| Tangent of loss angle (tan δ) | Rated voltage (V)                                                                                                                                                                                                                       | 10              | 16   | 25   | 35   | 50                 | Measurement frequency : 120Hz at 20°C             |                               |
|                               | tan δ (MAX.)                                                                                                                                                                                                                            | 0.30            | 0.23 | 0.18 | 0.16 | 0.16               |                                                   |                               |
| Stability at Low Temperature  | Rated voltage (V)                                                                                                                                                                                                                       |                 | 10   | 16   | 25   | 35                 | 50                                                | Measurement frequency : 120Hz |
|                               | Impedance ratio<br>ZT / Z20 (MAX.)                                                                                                                                                                                                      | Z-40°C / Z+20°C | 12   | 8    | 6    | 4                  | 4                                                 |                               |
|                               |                                                                                                                                                                                                                                         |                 |      |      |      |                    |                                                   |                               |
| Endurance                     | The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 135°C.                                                                                    |                 |      |      |      | Capacitance Change | Within ± 30% of the initial capacitance value     |                               |
|                               |                                                                                                                                                                                                                                         |                 |      |      |      | tan δ              | 300% or less than the initial specified value     |                               |
|                               |                                                                                                                                                                                                                                         |                 |      |      |      | Leakage current    | Less than or equal to the initial specified value |                               |
| Shelf Life                    | After storing the capacitors under no load at 135°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above. |                 |      |      |      |                    |                                                   |                               |
| Resistance to soldering heat  | The capacitors shall be kept on the hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.        |                 |      |      |      | Capacitance Change | Within ±10% of the initial capacitance value      |                               |
|                               |                                                                                                                                                                                                                                         |                 |      |      |      | tan δ              | Less than or equal to the initial specified value |                               |
|                               |                                                                                                                                                                                                                                         |                 |      |      |      | Leakage current    | Less than or equal to the initial specified value |                               |
| Marking                       | Black print on the case top.                                                                                                                                                                                                            |                 |      |      |      |                    |                                                   |                               |

## Radial Lead Type


### (φ6.3)【Vibration Resistance】



### (φ8 to φ10)【Standard】

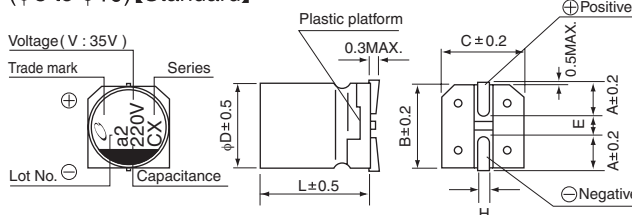

### (φ12.5 to φ18)【Standard】

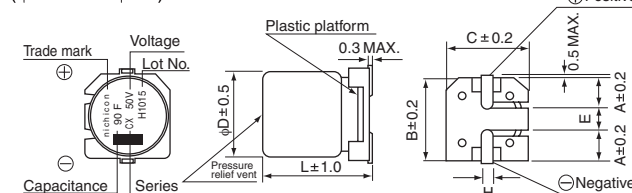

### Standard

| φD×L | 8×10       | 10×10      | 12.5×13.5  | 16×16.5, 21.5 | 18×16.5, 21.5 |
|------|------------|------------|------------|---------------|---------------|
| A    | 2.9        | 3.2        | 4.8        | 5.4           | 6.4           |
| B    | 8.3        | 10.3       | 13.6       | 17.1          | 19.1          |
| C    | 8.3        | 10.3       | 13.6       | 17.1          | 19.1          |
| E    | 3.1        | 4.5        | 4          | 6.3           | 6.3           |
| L    | 10         | 10         | 13.5       | 16.5, 21.5    | 16.5, 21.5    |
| H    | 0.8 to 1.1 | 0.8 to 1.1 | 1.0 to 1.4 | 1.0 to 1.4    | 1.0 to 1.4    |

### Vibration Resistance

| φD×L | 6.3×10     | 8×10       | 10×10      | 12.5×13.5  | 16×16.5, 21.5 | 18×16.5, 21.5 |
|------|------------|------------|------------|------------|---------------|---------------|
| A    | 2.4        | 2.9        | 3.2        | 4.8        | 5.4           | 6.4           |
| B    | 6.6        | 8.3        | 10.3       | 13.6       | 17.1          | 19.1          |
| C    | 6.6        | 8.3        | 10.3       | 13.6       | 17.1          | 19.1          |
| E    | 2.2        | 3.1        | 4.5        | 4          | 6.3           | 6.3           |
| L    | 10         | 10         | 10         | 13.5       | 16.5, 21.5    | 16.5, 21.5    |
| H    | 0.5 to 0.8 | 1.1 to 1.5 | 1.1 to 1.5 | 1.0 to 1.4 | 1.0 to 1.4    | 1.0 to 1.4    |

⬜ Aid electrode


### Rated Voltage

| V    | 10 | 16 | 25 | 35 | 50 |
|------|----|----|----|----|----|
| Code | A  | C  | E  | V  | H  |

●Dimension table in next page.

CAT.8100D

## Type numbering system (Example : 35V 47μF)

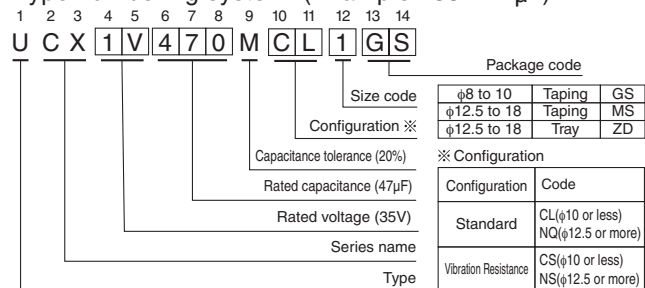



## ■ Dimensions

| Cap.(μF) | V   | Code                                           | 10                    | 16                                              | 25                            | 35                                                            | 50                           |
|----------|-----|------------------------------------------------|-----------------------|-------------------------------------------------|-------------------------------|---------------------------------------------------------------|------------------------------|
|          |     |                                                | 1A                    | 1C                                              | 1E                            | 1V                                                            | 1H                           |
| 47       | 470 |                                                |                       |                                                 |                               | ●6.3 X 10 0.25 4 15 197<br>8 X 10 0.20 3 12 270               | 8 X 10 0.25 3.5 15 270       |
| 68       | 680 |                                                |                       |                                                 |                               | 8 X 10 0.20 3 12 270                                          |                              |
| 100      | 101 |                                                |                       | ●6.3 X 10 0.25 4 15 197<br>8 X 10 0.20 3 12 270 | 8 X 10 0.20 3 12 270          | ●6.3 X 10 0.25 4 15 197<br>8 X 10 0.20 3 12 270               | 10 X 10 0.2 2.5 12 500       |
| 220      | 221 | 8 X 10 0.20 3 12 270                           | 8 X 10 0.20 3 12 270  |                                                 | 10 X 10 0.15 2 10 500         | 10 X 10 0.15 2 10 500                                         |                              |
| 330      | 331 | ●8 X 10 0.20 3 12 270<br>10 X 10 0.15 2 10 500 | 10 X 10 0.15 2 10 500 |                                                 | 10 X 10 0.15 2 10 500         |                                                               |                              |
| 390      | 391 |                                                |                       |                                                 |                               |                                                               | 12.5 X 13.5 0.09 1.3 6.5 750 |
| 470      | 471 | 10 X 10 0.15 2 10 500                          | 10 X 10 0.15 2 10 500 |                                                 |                               | 12.5 X 13.5 0.07 1.0 5.0 750                                  | 16 X 16.5 0.07 0.70 3.5 1000 |
| 560      | 561 |                                                |                       |                                                 |                               | 12.5 X 13.5 0.07 1.0 5.0 750                                  | 16 X 16.5 0.07 0.70 3.5 1000 |
| 680      | 681 |                                                |                       |                                                 |                               | 12.5 X 13.5 0.07 1.0 5.0 750                                  | 18 X 16.5 0.07 0.70 3.5 1200 |
| 820      | 821 |                                                |                       |                                                 | 12.5 X 13.5 0.07 1.0 5.0 750  | 16 X 16.5 0.05 0.50 2.5 1200                                  | 18 X 16.5 0.07 0.70 3.5 1200 |
| 1000     | 102 |                                                |                       |                                                 | 12.5 X 13.5 0.07 1.0 5.0 750  | 16 X 16.5 0.05 0.50 2.5 1200                                  | 16 X 21.5 0.05 0.40 2.0 1600 |
| 1200     | 122 |                                                |                       |                                                 | 16 X 16.5 0.05 0.50 2.5 1200  | 18 X 16.5 0.05 0.50 2.5 1400                                  | 18 X 21.5 0.04 0.32 1.6 1900 |
| 1500     | 152 |                                                |                       |                                                 | 16 X 16.5 0.05 0.50 2.5 1200  | ●16 X 21.5 0.04 0.32 1.6 1900<br>18 X 16.5 0.05 0.50 2.5 1400 |                              |
| 1800     | 182 |                                                |                       |                                                 | 16 X 16.5 0.05 0.50 2.5 1200  | 18 X 21.5 0.035 0.28 1.4 2200                                 |                              |
| 2200     | 222 |                                                |                       |                                                 | 18 X 16.5 0.05 0.50 2.5 1400  | 18 X 21.5 0.035 0.28 1.4 2200                                 |                              |
| 2700     | 272 |                                                |                       |                                                 | 16 X 21.5 0.04 0.32 1.6 1900  |                                                               |                              |
| 3300     | 332 |                                                |                       |                                                 | 18 X 21.5 0.035 0.28 1.4 2200 |                                                               |                              |

MAX. ESR (Ω) at 20°C / -40°C 100kHz, Rated ripple current(mArms) at 135°C 100kHz

●In this case, [6] will be put at 12th digit of type numbering system.

## ● Frequency coefficient of rated ripple current

| Frequency   | 50Hz | 120Hz | 300Hz | 1kHz | 10kHz or more |
|-------------|------|-------|-------|------|---------------|
| Coefficient | 0.35 | 0.50  | 0.64  | 0.83 | 1.00          |

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please refer to page 3 for the minimum order quantity.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9