

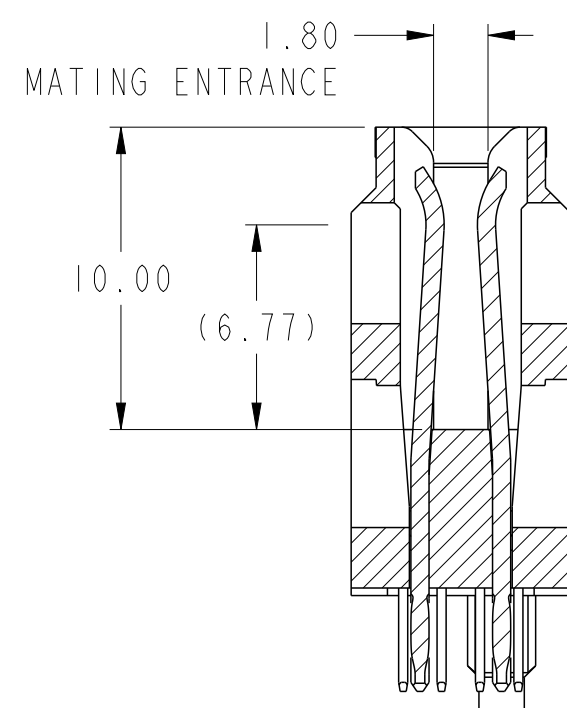
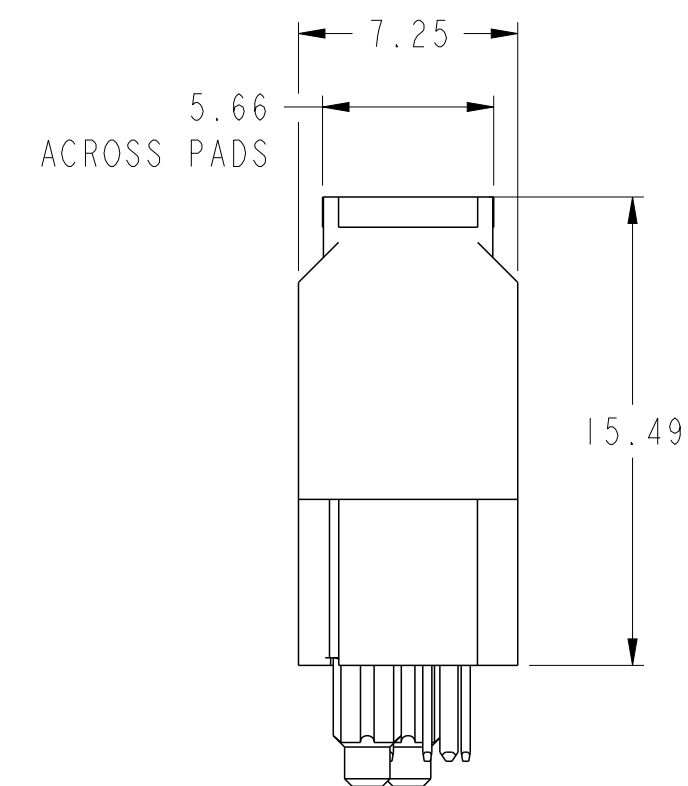
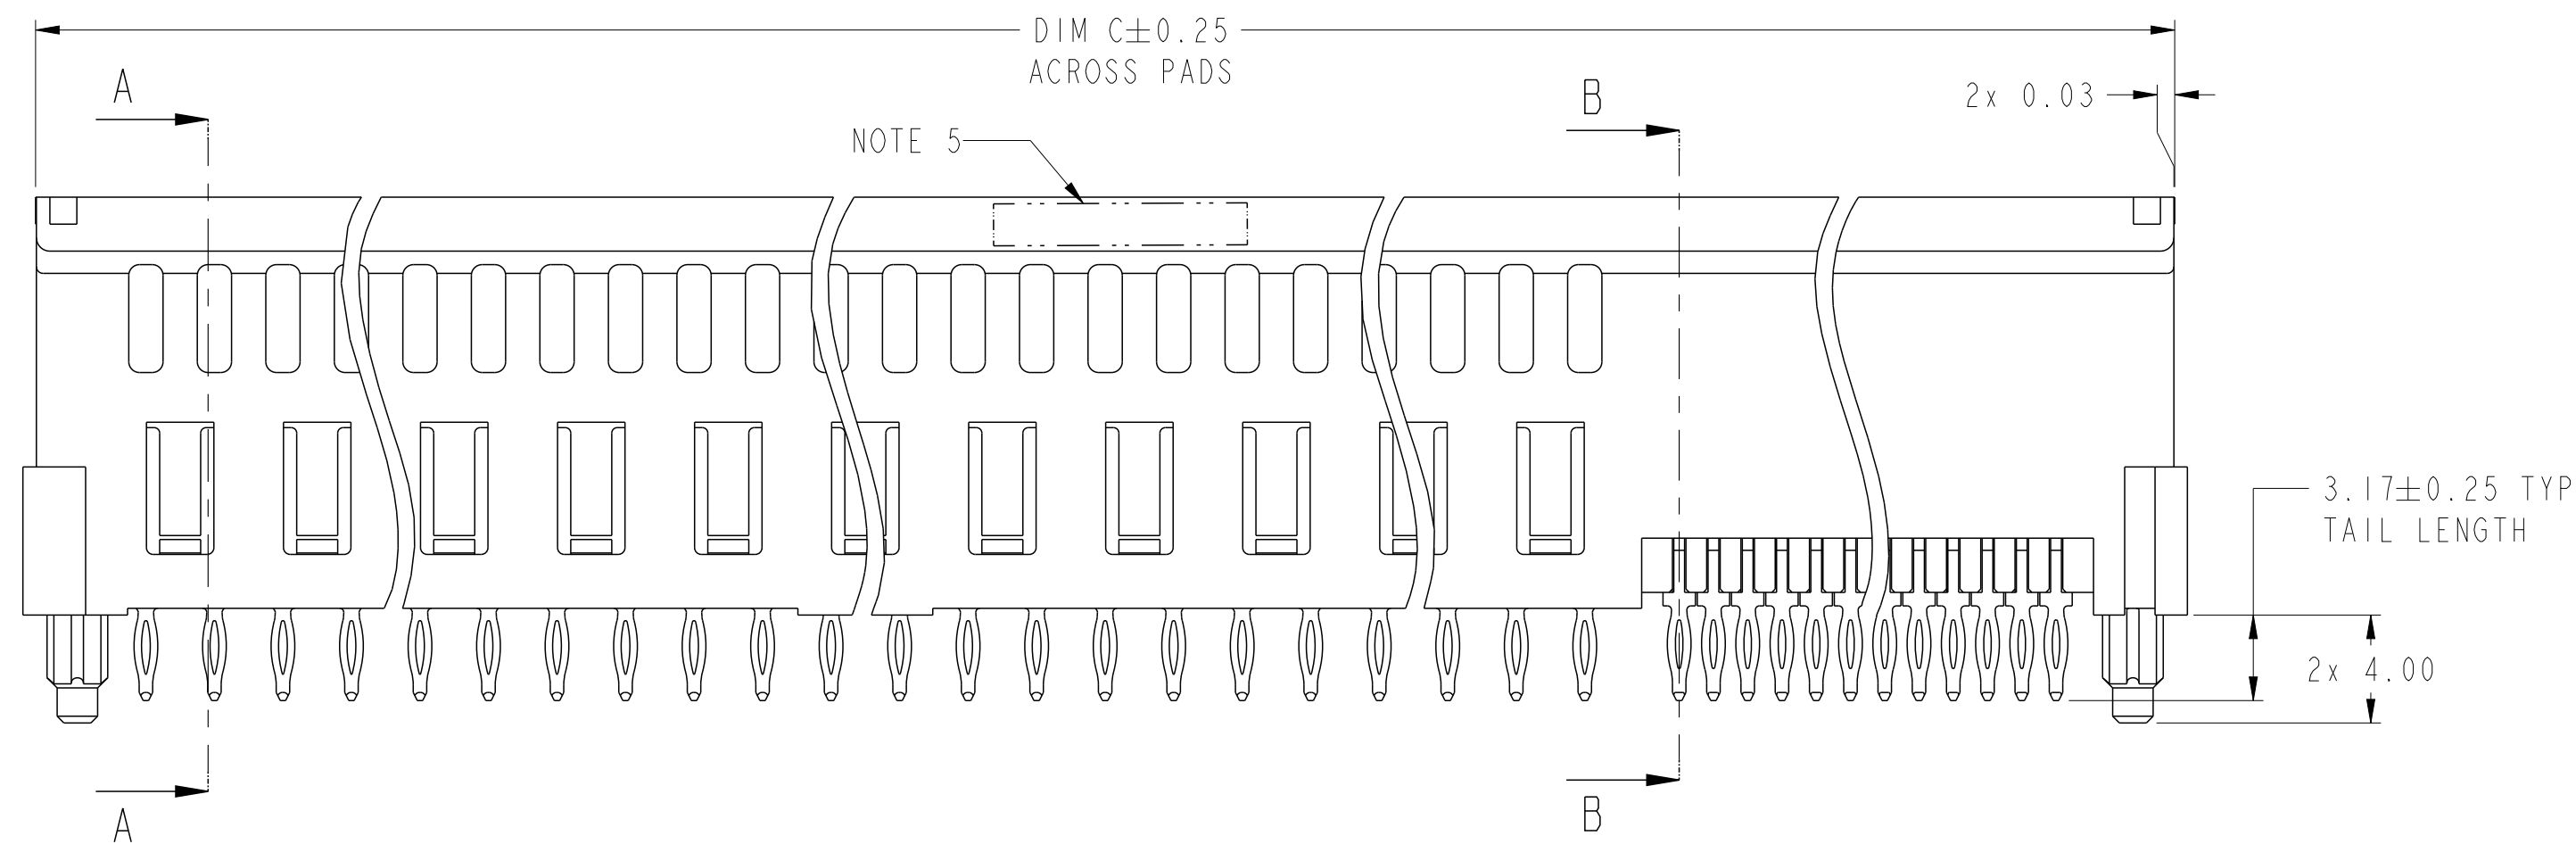
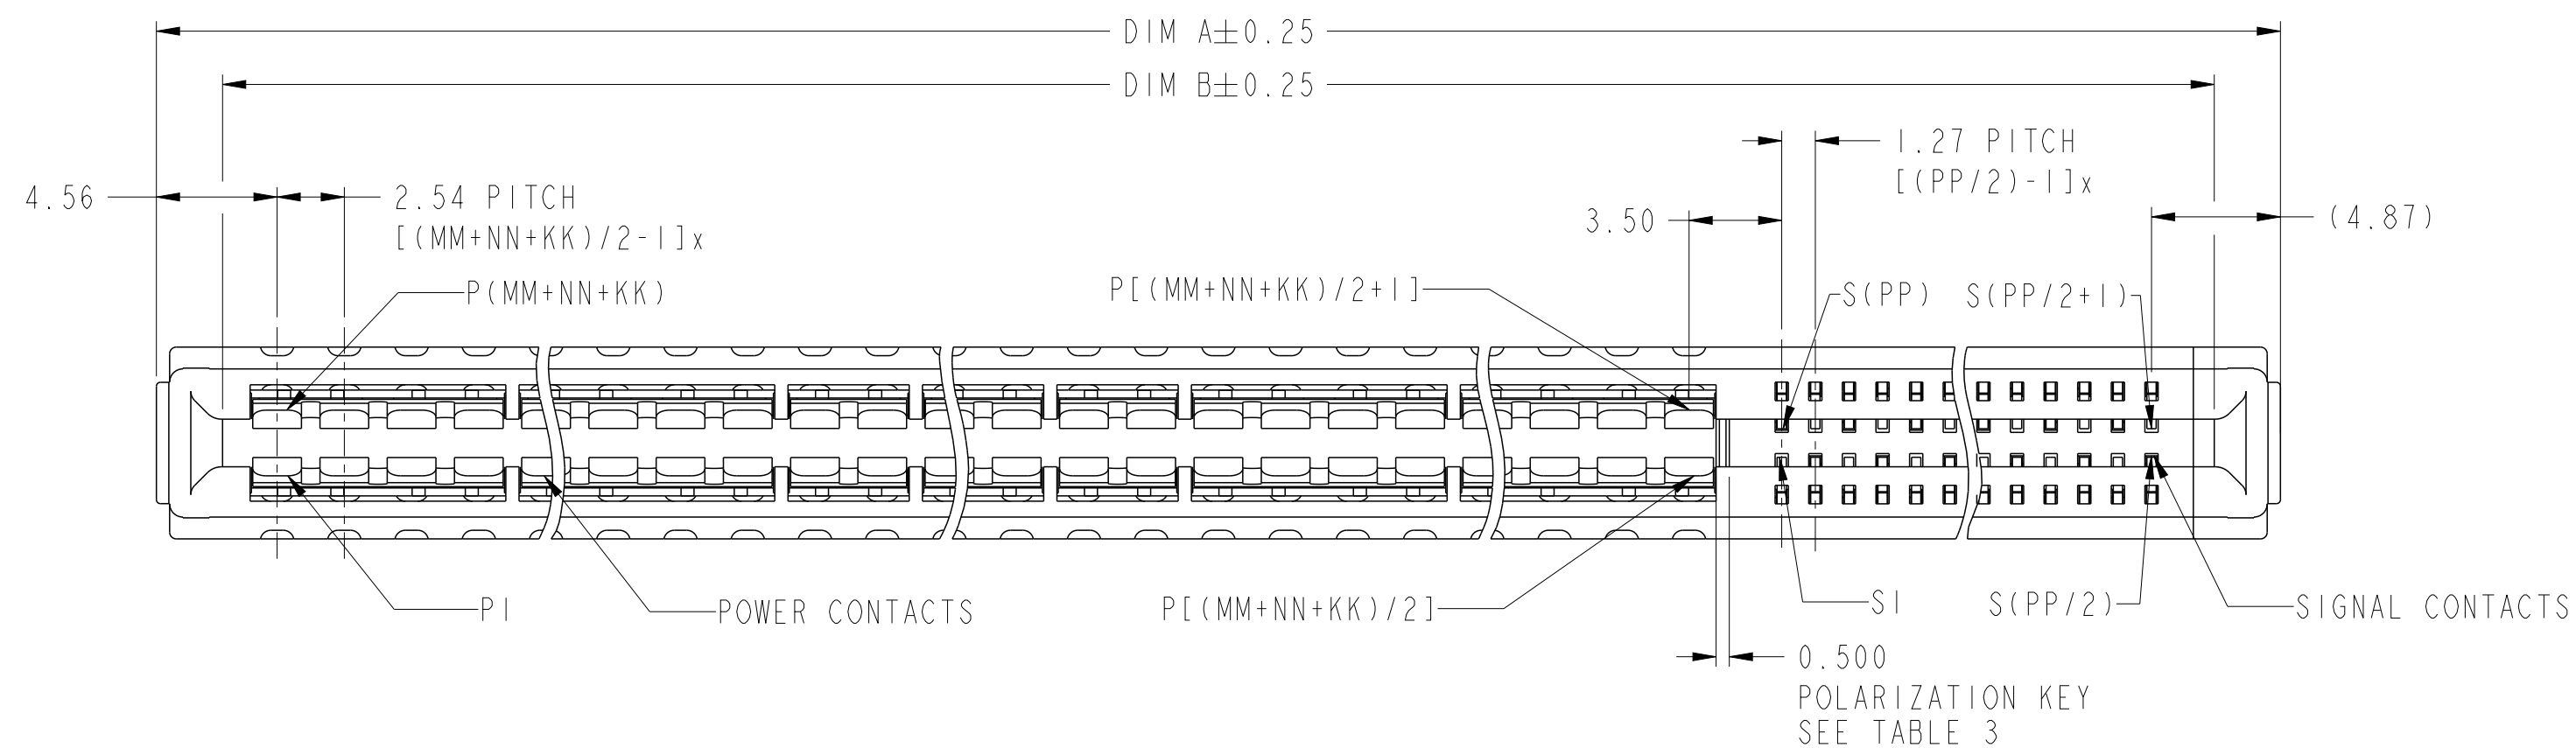
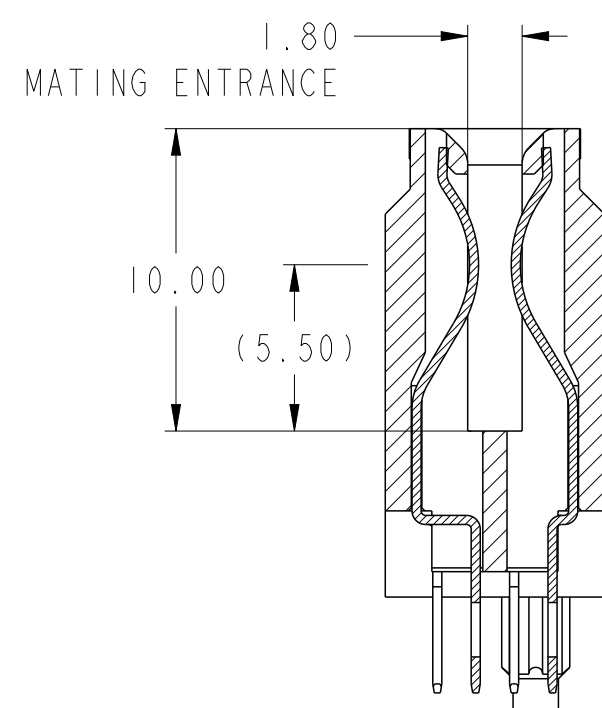






SECTION A-A



SECTION B-B

spec ref		-	dr		De-Ming Lu	2013/11/03	projection		MM		size	A2	scale	4:1
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		De-Ming Lu	2014/02/19					ecn no	-		
			chr		-	-					-			
ISO 406		appr		Pei-Ming Zheng		2014/02/19	product family		HPCE	rel level			Released	
ISO 1101														
surface		linear	0.X	±0.5		title	VERT REC WITH ENHANCED WALLS			dwg no	10127905		rev	A
			0.XX	±0.25										
			0.XXX	±0.10										
ISO 1302		angular	0°	±2°	www.fci.com	cat. no.	Product - Customer Drw			sheet 1 of 4				

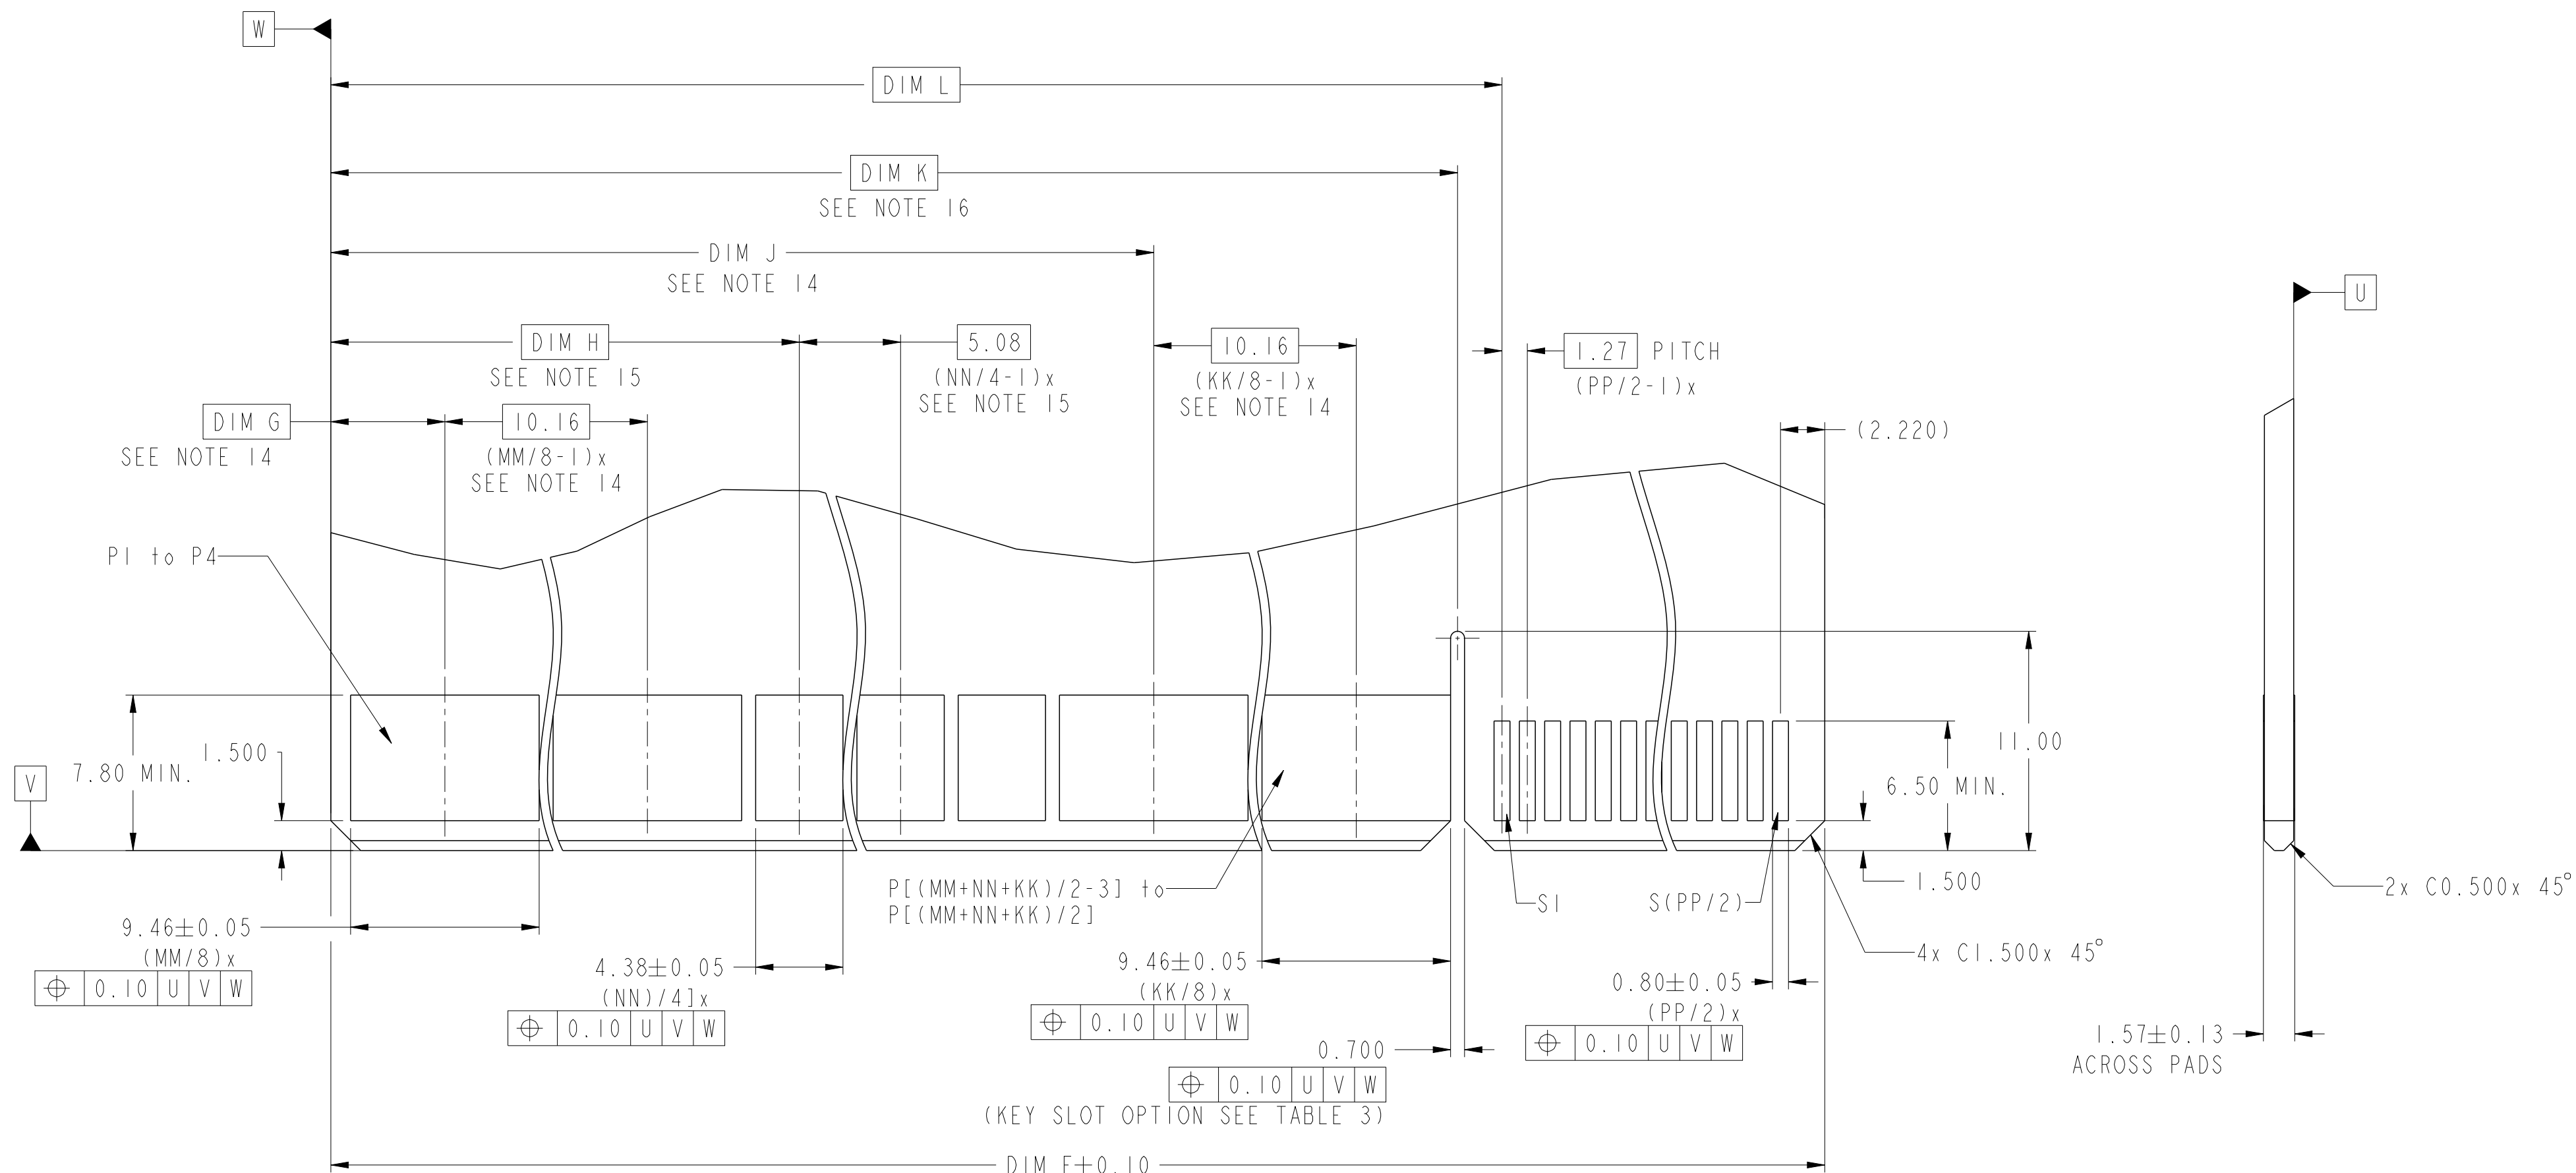

spec ref		-		dr		De-Ming Lu		2013/11/03		projection		MM		size		A2		scale		4:1	
tolerance std		ISO 406 ISO 1101		eng		De-Ming Lu		2014/02/19		chr		-		-		ecn no		-			
		TOLERANCES UNLESS OTHERWISE SPECIFIED		appr		Pei-Ming Zheng		2014/02/19		product family		HPCE		rel level		Released					
surface		✓		linear		0.X		±0.5		FCI		title		VERT REC WITH ENHANCED WALLS		dwg no		10127905		rev	
						0.XX		±0.25						P+S CONFIGURATION - UNIVERSAL DRAWING						A	
ISO 1302				angular		0°		±2°		www.fci.com		cat. no.		Product - Customer Drw		sheet 3 of 4					

10127905 - MM NN KK PP LF LEAD FREE

LEFT QUAD PWR BEAM QTY
CONFIGURATION SEE TABLE 5

DUAL PWR BEAM QTY
(NEXT TO SIGNAL)

RIGHT QUAD PWR BEAM QTY
CONFIGURATION SEE TABLE 5

SIGNAL CONTACT QTY

	A	B	C	D
Polarization Key Option	Y	Y	N	N
Tail Type Note 12	STB	PF	STB	PF


CONFIGURATION:
I: 4 BEAM (NN = 00 AND KK = 00);
II: 2 BEAM (MM = 00 AND KK = 00);
III: 4 BEAM + 2 BEAM (KK = 00);
IV: 2 BEAM + 4 BEAM (MM = 00);
V: 4 BEAM + 2 BEAM + 4 BEAM.

TABLE 3. PART NUMBER CODE. HPCE VERT P+S CONFIG (SPECIAL)

NOTES:

1. CONNECTOR MATERIALS:
- HOUSING: HIGH TEMPERATURE THERMAL PLASTIC, BLACK
UL 94V-0 COMPLIANT
- CONTACTS: HIGH PERFORMANCE COPPER ALLOY.
2. CONTACT FINISH REF. GS-12-604 SECTION 5.2.
3. PRODUCT SPECIFICATION: GS-12-604.
4. APPLICATION SPECIFICATION: GS-20-128.
5. PRODUCT MARKING (FCI - PART NUMBER & DATE CODE) ON HOUSING IN AREA SHOWN.
6. PACKAGING MEETS FCI SPECIFICATION GS-14-937.
7. HOUSING COMPONENT WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 60 SECONDS IN A CONVECTION, INFRA-RED, OR VAPOR PHASE REFLOW OVEN.
8. COPPER PLATING THICKNESS IN CENTER OF VIA-HOLE CAN BE NO MORE THAN 0.003 LESS THAN OTHER AREAS.
9. ALL HOLE SIZES ARE FINISHED HOLE SIZES.
10. MOUNTING HOLES ARE UNPLATED
Ø 2.40 +/- 0.1 FOR PRESS-FIT TAILS
Ø 2.18 +/- 0.03 FOR SOLDER TAILS
11. PRESS FIT APPLICATION TOOL DRAWING : 10119453.
12. STB= Solder to board, 1.57-2.38mm PCB thickness.
PF = Press fit, 1.57mm minimum PCB thickness.
13. MAXIMUM OVERALL LENGTH IS 100mm.

14. DIM IS NOT APPLICABLE IF NO 4 BEAM CONTACT.
15. DIM IS NOT APPLICABLE IF NO 2 BEAM CONTACT.
16. DIM IS NOT APPLICABLE IF NO POLARIZATION KEY.
17. DUE TO FCI PART NUMBER LENGTH LIMITED, A LETTER WILL REPLACE MM AND KK, DETAIL SEE TABLE 5.

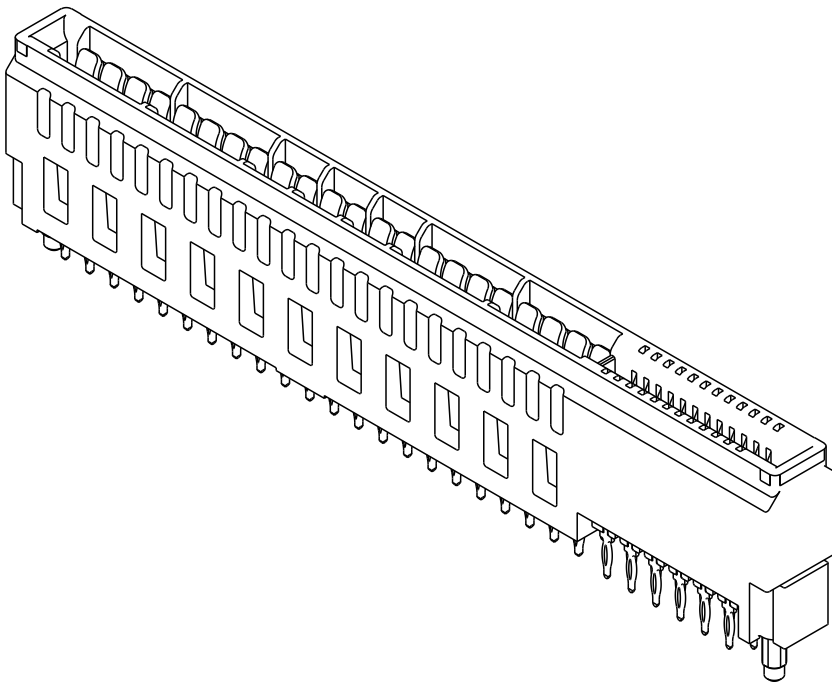

EXAMPLE: 10127905-BI2B24BLF

TABLE 5	
LETTER	REPRESENT QUAD PWR BEAM QTY
A	08
B	16
C	24
D	32
E	40
F	48
G	56

spec ref -				dr De-Ming Lu		2013/11/03		projection		MM		size A2		scale 4:1					
tolerance std				eng De-Ming Lu		2014/02/19						ecn no -							
ISO 406 ISO 1101				chr -		2014/02/19						rel level Released							
				appr Pei-Ming Zheng		2014/02/19		product family		HPCE									
surface		linear		0.X		±0.5				title		VERT REC WITH ENHANCED WALLS		dwg no		10127905		rev	
				0.XX		±0.25													
		0.XXX		±0.10		P+S CONFIGURATION - UNIVERSAL DRAWING													
ISO 1302		angular		0°		±2°		www.fci.com		cat. no.		Product - Customer Drw		sheet 4 of 4					

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9