


UZT 4.5mmL Chip Type, Wide Temperature Range



- Chip type with 4.5mm height, operating over wide temperature range of -40 to +105°C.
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).
- AEC-Q200 compliant. Please contact us for details.


Specifications

| Item | Performance Characteristics | | | | | | |
|-------------------------------|---|--|----|----|----|----|----|
| Category Temperature Range | -40 to +105°C | | | | | | |
| Rated Voltage Range | 6.3 to 50V | | | | | | |
| Rated Capacitance Range | 1 to 100μF | | | | | | |
| Capacitance Tolerance | ±20% at 120Hz, 20°C | | | | | | |
| Leakage Current | After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV or 3 (μA), whichever is greater. | | | | | | |
| Tangent of loss angle (tan δ) | Measurement frequency : 120Hz at 20°C | | | | | | |
| | Rated voltage (V) | 6.3 | 10 | 16 | 25 | 35 | 50 |
| Stability at Low Temperature | Measurement frequency : 120Hz | | | | | | |
| | Rated voltage (V) | 6.3 | 10 | 16 | 25 | 35 | 50 |
| | Impedance ratio ZT / Z20 (MAX.) | Z-25°C / Z+20°C | 6 | 5 | 3 | 3 | 3 |
| Endurance | The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 105°C. | | | | | | |
| | Capacitance change | Within ±25% of the initial capacitance value (16V or less) | | | | | |
| | tan δ | Within ±20% of the initial capacitance value (25V or more) | | | | | |
| Shelf Life | After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above. | | | | | | |
| | Capacitance change | Within ±10% of the initial capacitance value | | | | | |
| | tan δ | Less than or equal to the initial specified value | | | | | |
| Resistance to soldering heat | The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C. | | | | | | |
| | Capacitance change | Less than or equal to the initial specified value | | | | | |
| | Leakage current | Less than or equal to the initial specified value | | | | | |
| Marking | Black print on the case top. | | | | | | |

Chip Type



Type numbering system (Example : 16V 10μF)

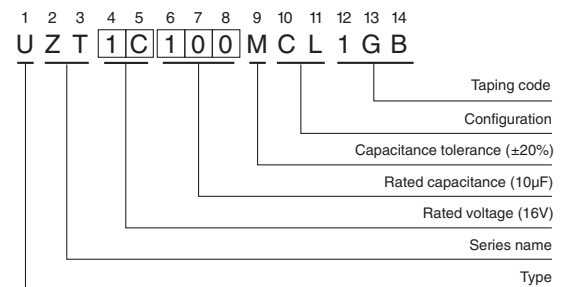

Dimensions

| Cap. (μF) | Code | 6.3 | | 10 | | 16 | | 25 | | 35 | | 50 | |
|-----------|------|-----|----|-----|----|-----|----|-----|----|-----|----|-----|-----|
| | | 0J | | 1A | | 1C | | 1E | | 1V | | 1H | |
| 1 | 010 | | | | | | | | | | | 4 | 5.4 |
| 2.2 | 2R2 | | | | | | | | | | | 4 | 9.6 |
| 3.3 | 3R3 | | | | | | | | | | | 4 | 12 |
| 4.7 | 4R7 | | | | | | | 4 | 11 | 4 | 13 | 5 | 16 |
| 10 | 100 | | | | | 4 | 16 | 5 | 20 | 5 | 22 | 6.3 | 26 |
| 22 | 220 | 4 | 19 | 5 | 24 | 5 | 26 | 6.3 | 33 | 6.3 | 36 | | |
| 33 | 330 | 5 | 26 | 5 | 30 | 6.3 | 35 | 6.3 | 42 | | | | |
| 47 | 470 | 5 | 32 | 6.3 | 40 | 6.3 | 44 | | | | | | |
| 100 | 101 | 6.3 | 52 | | | | | | | | | | |

Rated ripple current (mArms) at 105°C 120Hz

Frequency coefficient of rated ripple current

| Frequency | 50 Hz | 120 Hz | 300 Hz | 1 kHz | 10 kHz or more |
|-------------|-------|--------|--------|-------|----------------|
| Coefficient | 0.70 | 1.00 | 1.17 | 1.36 | 1.50 |

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please select UUX(p.170), UUU(p.176) series if high C/V products are required.
- Please refer to page 3 for the minimum order quantity.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9